



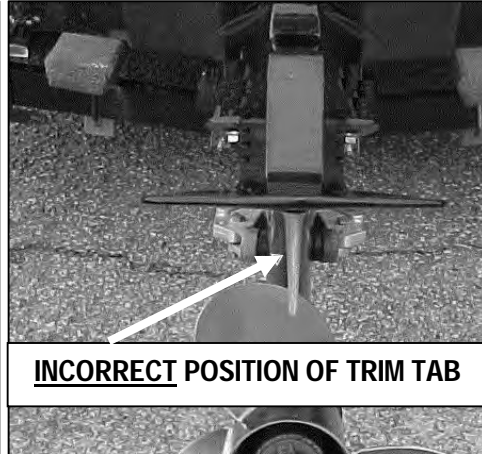




715 7<sup>th</sup> Street • Chipley, FL 32428  
 (800) 874-7861 toll-free • ezyglideinc@hotmail.com

# EZY-STIK<sup>®</sup> STEERING SETUP

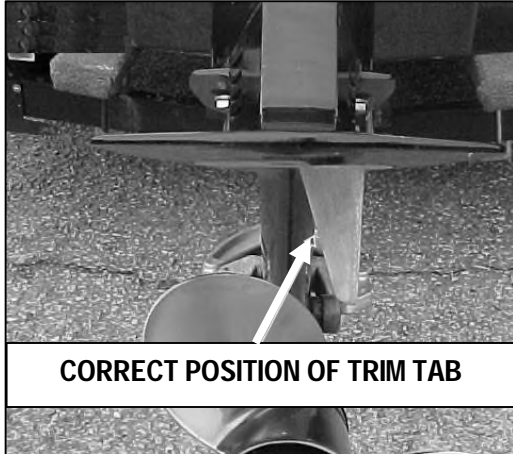

Position Trim Tab as shown. Tab should be rotated 20 degrees counter-clockwise. Loosen tab bolt, rotate tab to the right, and retighten bolt.

Install link arm to the outer connecting point as shown. (60hp Mercury 4-stroke engine shown)

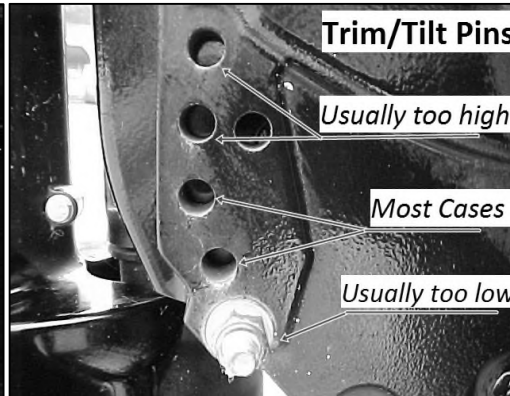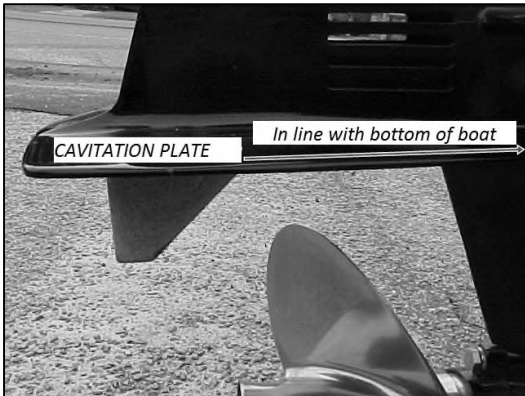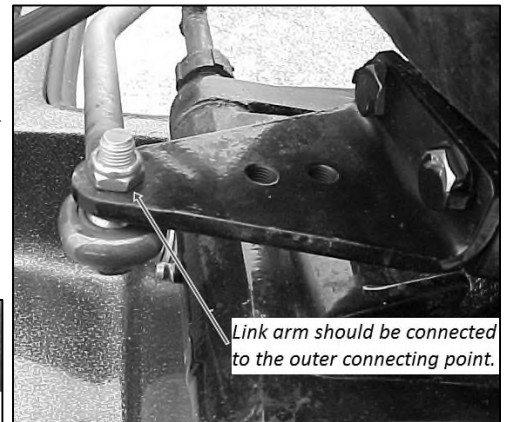

**Motor Height:**  
 (You may need dealer assistance)

*The Cavitation Plate on the outboard should be nearly level with the running pad of the boat.*

**Check steering equipment regularly!** The control lever is manufactured as a straight control lever. DO NOT attempt to re-design, re-fabricate or bend control lever. If your lever becomes bent, replace it.

**DO NOT Grease output ram!** A lightweight machine oil is best. Grease will work its way into the core section of the cable and over a period of time will dry out and your cable will become stiff.

**Always wear a personal flotation device. Always connect kill-switch before starting engine.**

**FOR ASSISTANCE, CALL EZY-GLIDE, INC.  
 (800) 874-7861 MONDAY-FRIDAY 8AM-4PM CST**