


In Your Corner

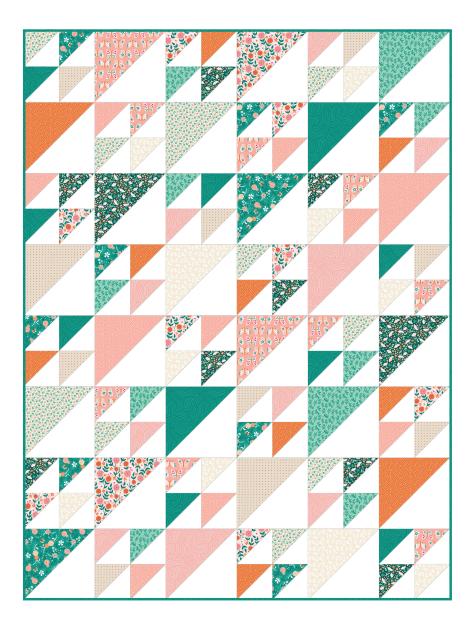

The joy of fabric.

CREDITS & INFO

In Your Corner Quilt

SIZE: 48½" X 64½"

TECHNICAL EDITOR: LINDA SPIRIDON

THIS PROJECT IS DESIGNED FOR MAXIMUM FLEXIBILTY FOR USE WITH ANY 12 COORDINATING FAT QUARTERS

SUPPLIES & NOTES

ROTARY CUTTER & MAT
TAPE MEASURE & RULER
SEWING MACHINE & COORDINATING THREAD
STRAIGHT PINS

WASH, DRY AND PRESS FABRICS BEFORE BEGINNING.

1/4" SEAM ALLOWANCE UNLESS OTHERWISE NOTED.

HST = HALF SQUARE TRIANGLE BLOCK

PRESS SEAMS AS YOU GO.

MATERIALS NEEDED

12 FAT QUARTERS
2 YARDS BACKGROUND FABRIC
½ YARD BINDING
4 YARDS BACKING

CUTTING DIRECTIONS

FROM EACH FAT QUARTER
(1) 9" SQUARE (12 TOTAL) & (4) 5" SQUARES (48 TOTAL)
FROM BACKGROUND FABRIC:

(12) 9" SQUARES & (48) 5" SQUARES

BLOCK ASSEMBLY —

- 1. DRAW A DIAGONAL LINE ON THE BACK SIDE OF ALL BAGKGROUND SQUARES SEE FIG 1
- 2. TO MAKE HST SELECT A 9" PRINT FABRIC SQUARE AND 9" BACKGROUND SQUARE. LAY RIGHT SIDES TOGETHER AND SEW 1/4" ON EACH SIDE OF THE DIAGONAL LINE. SEE FIG 2
- 3. CUT ON THE DIAGONAL LINE, UNFOLD EACH AND PRESS SEAMS TOWARD DARKER FABRIC
- 4. SQUARE UP BLOCK TO 8½" SQUARE. USE DIAGONAL 45° LINE ON THE RULER TO HELP CENTER BLOCKS. (TOTAL 24 LARGE HST BLOCKS)
- 5. REPEAT STEPS 2-4 WITH THE 5" SQUARES AND SQUARE UP TO 4½" SQUARES. (TOTAL 96 SMALL HST BLOCKS)





FIG 2






6. REFER TO THE ASSEMBLY DIAGRAM FOR FABRIC COLOR PLACEMENT AND SEW (4) 4½" HST INTO PAIRS AND MAKE A 4 PATCH (TOTAL 24 FOUR PATCH BLOCKS) SEE FIG 3

FIG 3 BLOCK ASSEMBLY CONT

QUILT ASSEMBLY

7. REFER TO THE ASSEMBLY DIAGRAM FOR FABRIC COLOR PLACEMENT AND BLOCK DIRECTION (OR ARRANGE HOWEVER YOU LIKE)

ARRANGE BLOCKS IN EIGHT HORIZONTAL ROWS OF SIX BLOCKS EACH. SEW THE BLOCKS TOGETHER IN ROWS. PRESS BLOCK SEAM ALLOWANCES IN ONE DIRECTION FOR EACH ROW, ALTERNATING THE DIRECTION FROM ROW TO ROW. SEE FIG 4

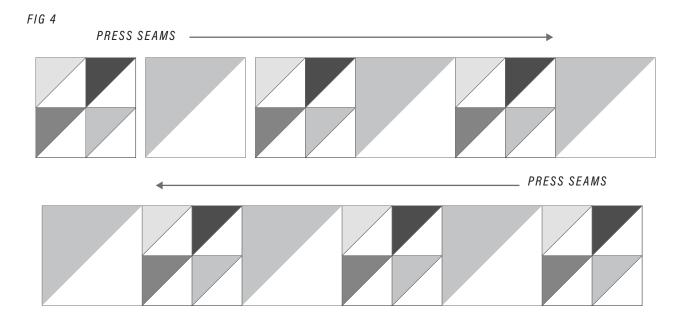

- 8. SEW THE ROWS TOGETHER TO COMPLETE THE QUILT TOP
- 9. LAYER THE BACKING, BATTING AND QUILT TOP
- 10. BASTE, QUILT AND BIND

ASSEMBLY DIAGRAM

