

ARE YOU SURE THAT YOU
ARE PROPERLY GROUNDED
WHEN TRANSFERRING
FLAMMABLES?

STATIC SURE

EVERY YEAR, HUNDREDS OF FIRES AND EXPLOSIONS
ARE CAUSED BY STATIC DISCHARGE WHEN
TRANSFERRING FLAMMABLES.

BE **SURE** THAT YOU ARE SAFE WITH THE NEW
STATICSURE PORTABLE STATIC MONITORING SYSTEM.

HELPS SAVE LIVES AND ENSURE COMPLIANCE WITH
CANADIAN FIRE CODES, NFPA 77 AND API RP2003

LIND  **EQUIPMENT**
WORK CONFIDENTLY.

BE SURE. STATICSURE.




Any transfer or mixing of flammable liquids or solids generates a static charge that has the potential to cause explosions. This is why all North American Fire Codes require operators to drain this static safely. But how do you know if you have a proper system in place?

The StaticSure device alerts you if an improper static bond or ground is in place, warning you **BEFORE** a problem can start.


CLAMP HAS STRONG, SHARP STAINLESS STEEL POINTS FOR MAXIMUM METAL TO METAL CONTACT

DURABLE STAINLESS STEEL UNIT CAN BE POSITIONED CLOSE TO THE CLAMP, OR MOUNTED ON A SURFACE CLOSE TO KNOWN GROUND POINT (SEE OVER FOR P/Ns)

BRIGHT RED LED ALERTS IF THERE IS A BAD CONNECTION & STATIC ELECTRICITY CANNOT BE DRAINED

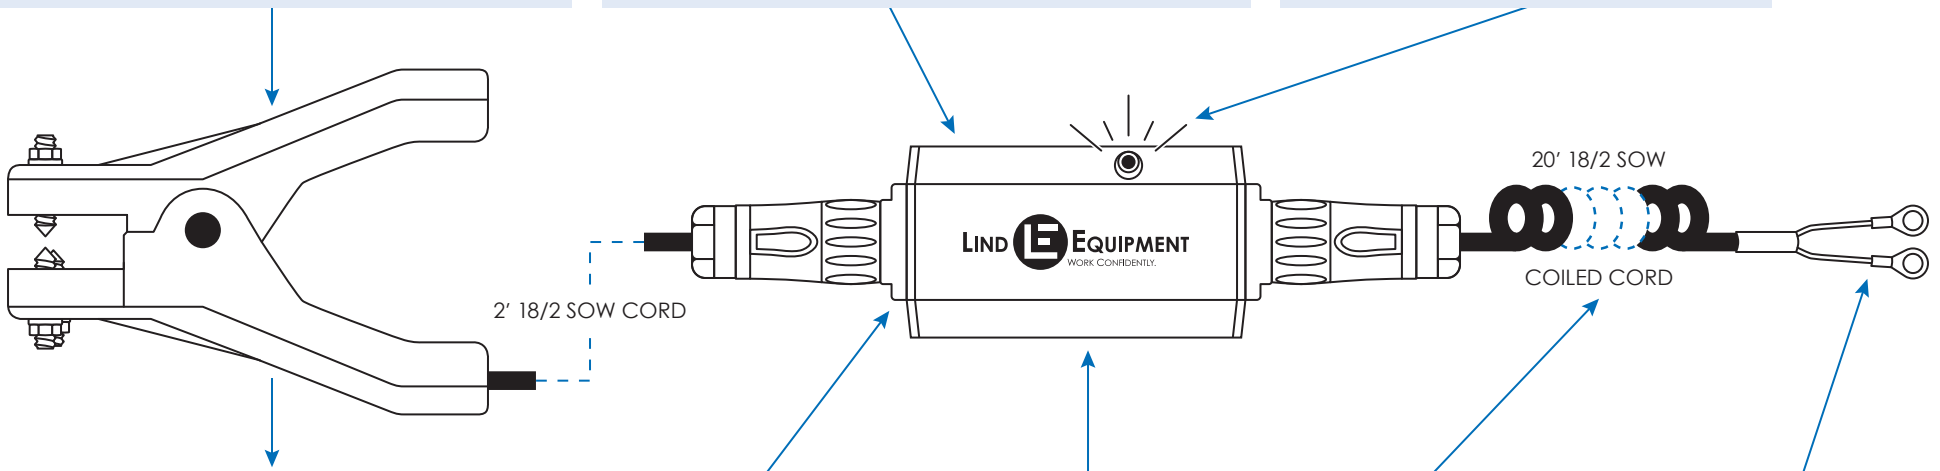

ALSO AVAILABLE:
LARGER CLAMP (GAT-PIP)
FOR TRUCKS/RAILCARS
(SEE OVER FOR P/Ns)



QUICK CONNECTS FOR
EASY ASSEMBLY & REPAIR

LONG BATTERY LIFE
(OVER 3 YEARS)

OVER 20' TOTAL LENGTH
OF HIGH QUALITY "CABTIRE"
CABLE

PREINSTALLED LUGS FOR
EASY ATTACHMENT TO
KNOWN GROUND POINT



Available on a reel for fuel transfer application.

IDEAL FOR:

- + Drumming operations
- + Fuel transfer
- + Truck/railcar loading and unloading
- + Chemical mixing
- + Aircraft fueling



Learn more about the hazards of static and the StaticSure device at:
www.lindequipment.net/staticsure
or scan this code with your smartphone.




APPROVALS:

Class I, Division 1, Groups ABCD
Class II, Division 1, Groups FG
IP65

ORDERING STATICSURE


LE600-20CG-2SL

- + 20' 18/2 SOW coiled cord with GAT-PIP clamp
- + LE600i portable static monitoring unit
- + 2' 18/2 SOW cord with lugs



LE600-20CR-2SL

- + 20' 18/2 SOW coiled cord with REB-IP clamp
- + LE600i portable static monitoring unit
- + 2' 18/2 SOW cord with lugs




LE600-20CG-2SG

- + 2' 18/2 SOW cord with GAT-PIP clamp
- + LE600i portable static monitoring unit
- + 20' 18/2 SOW coiled cord with GAT-PIP clamp



LE600-20CR-2SR

- + 2' 18/2 SOW cord with REB-IP clamp
- + LE600i portable static monitoring unit
- + 20' 18/2 SOW coiled cord with REB-IP clamp

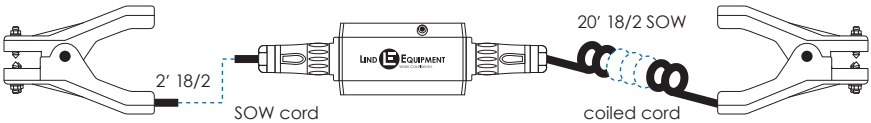

Replacement parts also available.

DISTRIBUTED BY:

No sticker here? Call us for your local distributor.