

 **NORDICLIGHTS**



LIGHTS FOR HEAVY  
DUTY VEHICLES



# CONTENT

<b>INTRODUCTION</b>	02
<b>LED SERIES</b>	06
MIRAGE -NEW!	08
<b>XTR/PRO SERIES</b>	12
SCORPIUS	12
CANIS	26
PHENOM OPTICS EQUIPPED	30
<b>GO SERIES</b>	34
SCORPIUS GO	36
CANIS GO	38
SATO GO	40
<b>KL SERIES</b>	42
<b>SPECIAL LIGHTS</b>	50
SATO 725 -NEW!	50
GEMINI	52
PICTOR	56
TAURUS	60
<b>SAFETY LIGHTS</b>	62
VELA	62
<b>REAR LIGHTS</b>	64
CORONA 400	64
DORADO	66
<b>FRONT LIGHTS</b>	68
BUMBLEBEE	68
CUE	70
SCULPTOR	72
N5XX	74
<b>WARRANTY &amp; ABBREVIATIONS</b>	76

# WE CREATE OPTIMAL VISIBILITY

Nordic Lights was founded in the darkness of the Finnish forests, where the need for illumination came out of pure necessity. During the years, we have learned just what it takes to develop the perfect work lights for every work site. Working closely with industry leading manufacturers of heavy-duty vehicles has given us a pro-found understanding of the everyday challenges that machine operators face.

We take pride in our in-house R&D department with modern light and testing labs, and the latest in simulation software. This enables us to stay ahead of the game, be creative and develop products according to very high standards. We have the best product developers and engineers, who are constantly designing world-class lighting solutions. And we have the best production team vouching for the uniquely low failure rate of our production.

Today, we can claim to be the world's best producer of lights for heavy-duty vehicles. We develop, design, manufacture, and test all of our work light series in our own factory in Finland. This way we ensure that every part of the process is fine-tuned to perfection.

The use of NORDIC LIGHTS® work lights on your heavy-duty equipment is a brilliant choice. You will get superior durability, low maintenance, and the best available technology backed by extensive testing. It is important to us to offer the ideal lighting solution to each customer. The light is optimized for the specific equipment or use by different combinations of light patterns, brackets, dampeners, and cable connectors. You can choose your LED work light from our extensive product range, or we can customize it for you.

In the introduction to our product range found in this brochure you will find the product's key facts, such as technical data and light patterns. If you would like to find out more about the What, How, and Why, please visit [nordiclights.com](http://nordiclights.com).





# THIS IS HOW WE ROLL

## Making Outstanding Lights for Heavy-Duty Vehicles

We make sure your product is truly ready for heavy-duty use. We will help you gain an optimal light level and even light distribution to improve efficiency and safety on the worksite. All our lights are premium products, sturdy and reliable. They are put through extensive testing before passing inspection. These tests include lumen output and light distribution, vibration and shock, dust and humidity, heat and cold exposure, thermal cycling, thermal protection, electro-magnetic compatibility, full functionality, abnormal conditions, chemical resistance, and usability. Our products are valued for their even light distribution and high quality.

## XTR



### THE UNBREAKABLE MASTER

We aim for perfection. This time, it meant creating something unbreakable. May we introduce our XTR series; premium lights with an outstanding lifespan and light output up to 7200 lumens. The work lights in the XTR series come equipped with our revolutionary QUAKE dampening system (QD) designed to withstand the harshest conditions. With a strength capacity of 20 Grms, the XTR takes protection against shock and vibration to the next level.

## PRO



### THE HEAVY-DUTY CHAMPION

We give you options. For the products in the PRO series we offer a wide range of light patterns and possibilities for customization. The work lights in our PRO series are equipped with die-cast brackets and a dampening system with a strength capacity of up to 15.3 Grms. With a light output of up to 4400 lumens, the upmarket products in our PRO series are tough to beat.



## GO SERIES



### THE STEP-IT-UP SERIES

We believe in simplicity. The GO series is aimed at those customers who are completely new to our products or would like to enhance their lighting standard from halogen to LED. In this series, we designed a variety of standard models with a long lifespan and low maintenance. Easy to use, the work lights in the GO series have a light output of between 1000 and 3000 lumens, and a dampening strength capacity of 8 Grms.

## KL SERIES




### THE AFFORDABLE ONE

We create sensible solutions. The work lights in our KL series are an excellent choice when you're looking for a cost-effective alternative for your heavy-duty equipment. This go-to product line is developed with both new and existing customers in mind, optimizing basic design and low-maintenance. The KL lights withstand vibration up to 8 Grms and their light output ranges from 300 to 2150 lumens.

# MIRAGE

## MEASUREMENTS

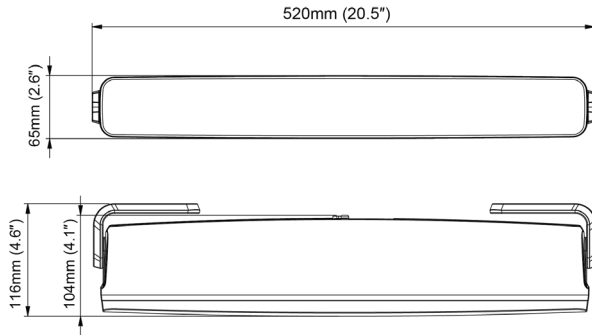

## THE MARVELOUS

The Mirage is our very first LED light bar for on- and off-road vehicles, combining heavy-duty standards with an automotive look. This clean-cut auxiliary light ticks all the boxes in terms of durability and design, with smooth edges all around to prevent ice and dirt from accumulating, and a hard-coated polycarbonate lens for superb impact resistance. The light beam is designed wider than average for the best possible vision. An even light distribution combined with the warm color temperature of 4500K gives you a clear advantage – a flicker- and streak-free illumination in visually demanding circumstances such as rain, dust, fog, or snow. Possible to mount both high and low – simply flip it to suit your application.



**NEW!**





## FEATURED PRODUCT



TECHNICAL SPECIFICATIONS	MIRAGE
Operational Lumens Output:	6200lm (Boost:7100lm)
Color Temperature:	4500K
Nominal / Input Voltage DC:	12–24V / 9–32V
Power Consumption:	84W (Boost:118W)
Nominal Current:	3.3A@24V / 7A@12V, (Boost: 4.4A@24V / 9.8A@12V)
Mount:	2 pcs M8 screw
Connector:	Built-in Deutsch DT-3 (3-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Approvals:	ECE
Electronics:	Isolated
Shock:	60G
IP Rating:	IP68, IP6K9K
Weight:	2.8kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)
Reference Number	50


## LIGHT PATTERNS

Mirage, 6200lm  
Standard

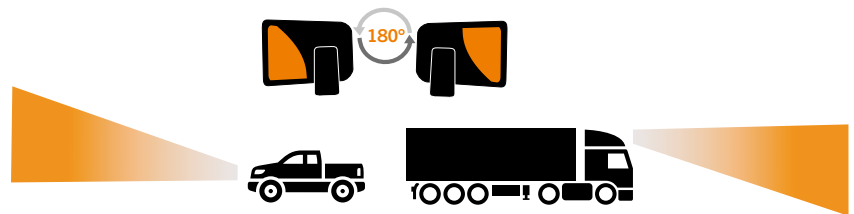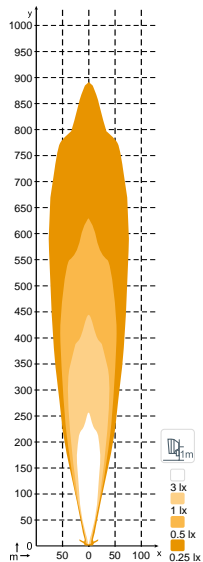

**FOR CARS AND TRUCKS** - simply flip to suit your application




 **NORDICLIGHTS**

2018 BYLAND

# SCORPIUS

## MEASUREMENTS

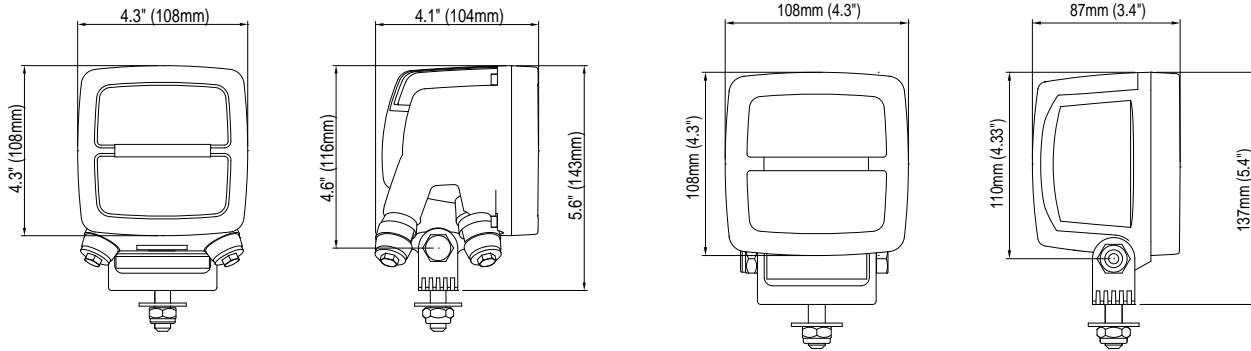


## IN A LEAGUE OF ITS OWN

The Scorpius product family has a square form factor, and an output ranging between 2000 and 7200 lumens. These LED work lights have an asymmetric wide flood light pattern option particularly suitable for large, open spaces. The Scorpius product series is the most popular in our collection and sees use in many industries, including mining, construction, forestry, trucking, emergency response, agriculture, and material handling. If you're looking for products for the harshest conditions, choose the XTR versions equipped with Nordic Lights' **QUAKE dampening (QD)** system






MEASUREMENTS

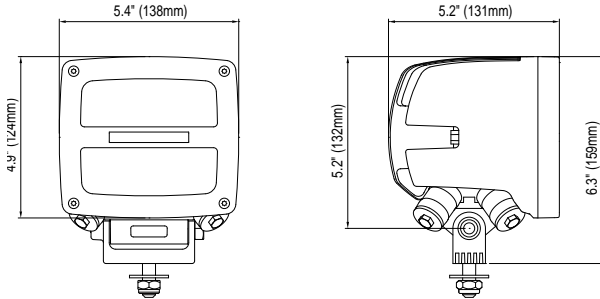


TECHNICAL SPECIFICATIONS	SCORPIUS LED N4601 QD
Theoretical / Operational Lumens:	11500lm / 7200lm
Color Temperature:	5700K
Nominal / Input Voltage DC:	24V / 18-32V
Power Consumption:	85W
Nominal Current:	3.5A@24V
Mount:	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G
Vibration:	15.3Grms 24-2000Hz, 4.65Grms 12-2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455
Weight:	2.5kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)

LIGHT PATTERNS


N4601 QD 7200lm High Beam




N4601 QD 7200lm Low Beam



N4601 QD 7200lm Wide Flood



N4601 QD 7200lm Flood








# LED SERIES XTR/PRO




TECHNICAL SPECIFICATIONS	SCORPIUS LED N4401 QD	SCORPIUS LED N4402
Theoretical / Operational Lumens:	6700 lm / 4200lm	6700 lm / 4200lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V	12–24V / 9–32V
Power Consumption:	50W	50W
Nominal Current:	2.1A@24V / 4.2A@12V	2.1A@24V / 4.2A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G	60G
Vibration:	20Grms 24–2000Hz, 4.65Grms 12–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.6kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


N4401 QD, N4402 4200lm  
High Beam




N4401 QD, N4402 4200lm  
Low Beam




N4401 QD, N4402 4200lm  
Wide Flood



N4401 QD, N4402 4200lm  
Flood



N4401 QD, N4402 3360lm  
Diffused







TECHNICAL SPECIFICATIONS	SCORPIUS LED N4403 QD	SCORPIUS LED N4404
Theoretical / Operational Lumens:	5000lm / 3200lm	5000lm / 3200lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V	12–24V / 9–32V
Power Consumption:	35W	35W
Nominal Current:	1.45A@24V / 2.9A@12V	1.45A@24V / 2.9A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G	60G
Vibration:	20Grms 24–2000Hz, 4.65Grms 12–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.6kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**N4403 QD, N4404, 3200lm  
High Beam**




**N4403 QD, N4404, 3200lm  
Low Beam**




**N4403 QD, N4404, 3200lm  
Wide Flood**



**N4403 QD, N4404, 3200lm  
Flood**



**N4403 QD, N4404, 2500lm  
Diffused**









TECHNICAL SPECIFICATIONS	SCORPIUS LED N4405 QD	SCORPIUS LED N4406
Theoretical / Operational Lumens:	3700lm / 2300lm	3700lm / 2300lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V	12–24V / 9–32V
Power Consumption:	22W	22W
Nominal Current:	0.9A@24V / 1.8A@12V	0.9A@24V / 1.8A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G	60G
Vibration:	20Grms 24–2000Hz, 4.65Grms 12–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.6kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**N4405 QD, N4406, 2200lm  
High Beam**




**N4405 QD, N4406, 2200lm  
Low Beam**




**N4405 QD, N4406, 2300lm  
Wide Flood**



**N4405 QD, N4406, 2200lm  
Flood**



**N4405 QD, N4406, 1750lm  
Diffused**




# LED SERIES XTR/PRO




TECHNICAL SPECIFICATIONS	SCORPIUS LED N4407 QD	SCORPIUS LED N4408
Theoretical / Operational Lumens:	3700 lm / 2300lm	3700lm / 2300lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V	12–24V / 9–32V
Power Consumption:	40W	40W
Nominal Current:	1.7A@24V / 3.4A@12V	1.7A@24V / 3.4A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G	60G
Vibration:	20Grms 24–2000Hz, 4.65Grms 12–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.6kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


N4407 QD, N4408 2300lm  
Pencil Beam

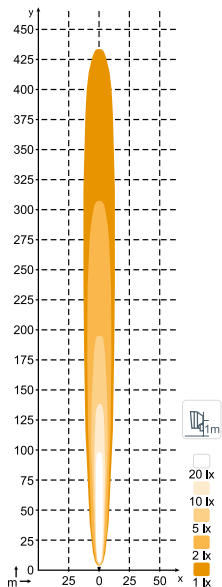

N4407 QD, N4408 2300lm  
High Beam

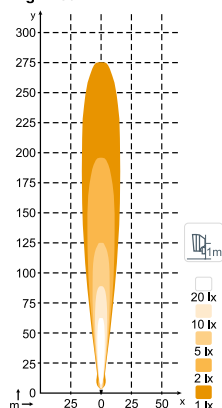

N4407 QD, N4408, 2300lm  
Low Beam







TECHNICAL SPECIFICATIONS	SCORPIUS LED N4409 QD	SCORPIUS LED N4410
Theoretical / Operational Lumens:	3700lm / 2300lm	3700lm / 2300lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V (Dimmable)	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	40W	40W
Nominal Current:	1.7A@24V / 3.4A@12V	1.7A@24V / 3.4A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	20Grms 24–2000Hz, 4.65Grms 12–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.6kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**N4409 QD, N4410, 2300lm**  
High Beam




**N4409 QD, N4410, 2300lm**  
Low Beam




**N4409 QD, N4410, 2300lm**  
Wide Flood



**N4409 QD, N4410, 2300lm**  
Flood



**N4409 QD, N4410, 1800lm**  
Diffused










**NEW!**


TECHNICAL SPECIFICATIONS	SCORPIUS PRO 445	SCORPIUS PRO 430
Theoretical / Operational Lumens:	7000lm / 4400lm	4800lm / 3000lm
Color Temperature:	5000K	5000K
Nominal / Input Voltage DC:	12–24V / 9–32V	12V, 24V / 9–16V, 18–32V
Power Consumption:	50W	33W
Nominal Current:	2.1A@24V / 4.2A@12V	1.4A@24V / 2.8A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	15.3Grms 24–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	1.1kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**Scorpius PRO 445, 4400lm**  
High Beam




**Scorpius PRO 445, 4400lm**  
Flood




**Scorpius PRO 445, 4400lm**  
Wide Flood (Symmetric)




**Scorpius PRO 430, 3000lm**  
High Beam




**Scorpius PRO 430, 3000lm**  
Flood




**Scorpius PRO 430, 3000lm**  
Wide Flood (Symmetric)



**Scorpius PRO 445, 4400lm**  
Wide Flood (Asymmetric)



**Scorpius PRO 430, 3000lm**  
Wide Flood (Asymmetric)






**NEW!**




TECHNICAL SPECIFICATIONS	SCORPIUS LED N4402 WARM	SCORPIUS 400 BLUE
Theoretical / Operational Lumens:	5700lm / 3600lm	Luminous intensity: 30000cd
Color Temperature:	2700K	Light Color: Blue, 475nm
Nominal / Input Voltage DC:	12–24V / 9–32V	12V, 24V / 9–16V, 18–32A
Power Consumption:	50W	42W
Nominal Current:	2.0A@24V / 3.9A@12V	2.1A@ 24V / 4.2A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2, EN 61000-4-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	15.3Grms 24–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K
Weight:	1.1kg	1.1kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

**LIGHT PATTERNS**


**N4402 WARM, 3600lm High Beam**




**N4402 WARM, 3600lm Low Beam**




**N4402 WARM, 3600lm Wide Flood**



**N4402 WARM, 3600lm Flood**




**Scorpius 400 BLUE, 475nm Pencil Beam**





# CANIS PRO 330

## MEASUREMENTS

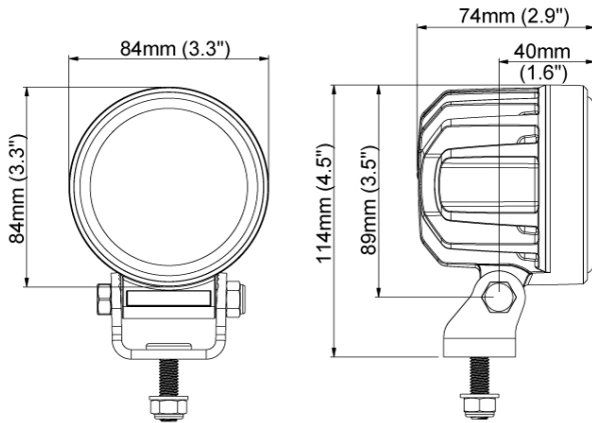

## READY TO RUMBLE

Born out of a search for raw power in a small package, the highly efficient Canis PRO 330 offers lots of lumens in a compact size. Perfect for demanding industries such as mining, construction, forestry and agriculture, this glass-lensed work light easily fits into tight spaces and is available with three different light patterns, including a horizontally extended Wide Flood and a slightly softer-than-usual High Beam. The Canis PRO 330 withstands vibrations of up to 15.3 Grms at 24-2000Hz and delivers 3000 operational lumens.









TECHNICAL SPECIFICATIONS	CANIS PRO 330
Theoretical / Operational Lumens:	4800lm / 3000lm
Color Temperature:	5000K
Nominal / Input Voltage DC:	12–24V / 9–32V
Power Consumption:	28W
Nominal Current:	2.3A@12V / 1.15A@24V
Mount:	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5
Electronics:	Isolated
Shock:	60G
Vibration:	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K
Weight:	0.65kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**Canis PRO 330, 3000lm  
High Beam**



**Canis PRO 330, 3000lm  
Flood**




**Canis PRO 330, 3000lm  
Wide Flood**





# Phenom Optics Equipped

## MEASUREMENTS

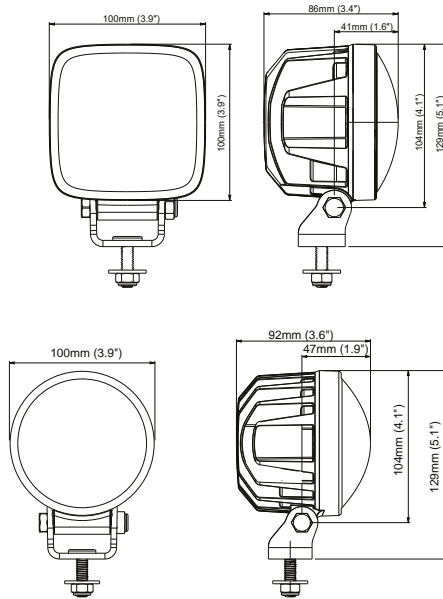

## NO GLARE WITH PHENOM OPTICS

Blinding people with your work lights is a thing of the past with the Phenom Optics (pat. pending) equipped Canis and Scorpius PRO 415 PH. With these work lights you will have maximum safety and high visibility, with a glare-free zone and all light focused on the desired areas. Canis and Scorpius PRO 415 PH are compact and lightweight, ideal for vehicles in material handling and construction. Thanks to the clear cut-off line, they have an asymmetrical wide flood light pattern that doesn't reach eye-level but still illuminates the work area efficiently. They deliver an operational lumen output of 1500 lm and withstand vibrations of up to 8 Grms.











TECHNICAL SPECIFICATIONS	SCORPIUS PRO 415 PH	CANIS PRO 415 PH
Theoretical / Operational Lumens:	1950lm / 1500lm	1950lm / 1500lm
Color Temperature:	5000K	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16, 18–32V	12V, 24V / 9–16, 18–32V
Power Consumption:	28W	28W
Nominal Current:	1.2A@24V / 2.4A@12V	1.2A@24V / 2.4A@12V
Mount:	Single Bolt M8	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN 14982-2, ISO 13766, EN 12895, ISO 11452-2, EN 13309, ISO 7637-2	CISPR 25 Class 5, EN 14982-2, ISO 13766, EN 12895, ISO 11452-2, EN 13309, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8 Grms 24–2000Hz	8 Grms 24–2000Hz
Lens:	Glass	Glass
Body:	IP68, IP6K9K	IP68, IP6K9K
Weight:	0.6kg	0.6kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)


## LIGHT PATTERNS

**Scorpius PRO 415 PH, 1500lm**  
Wide Flood



**Canis PRO 415 PH, 1500lm**  
Wide Flood



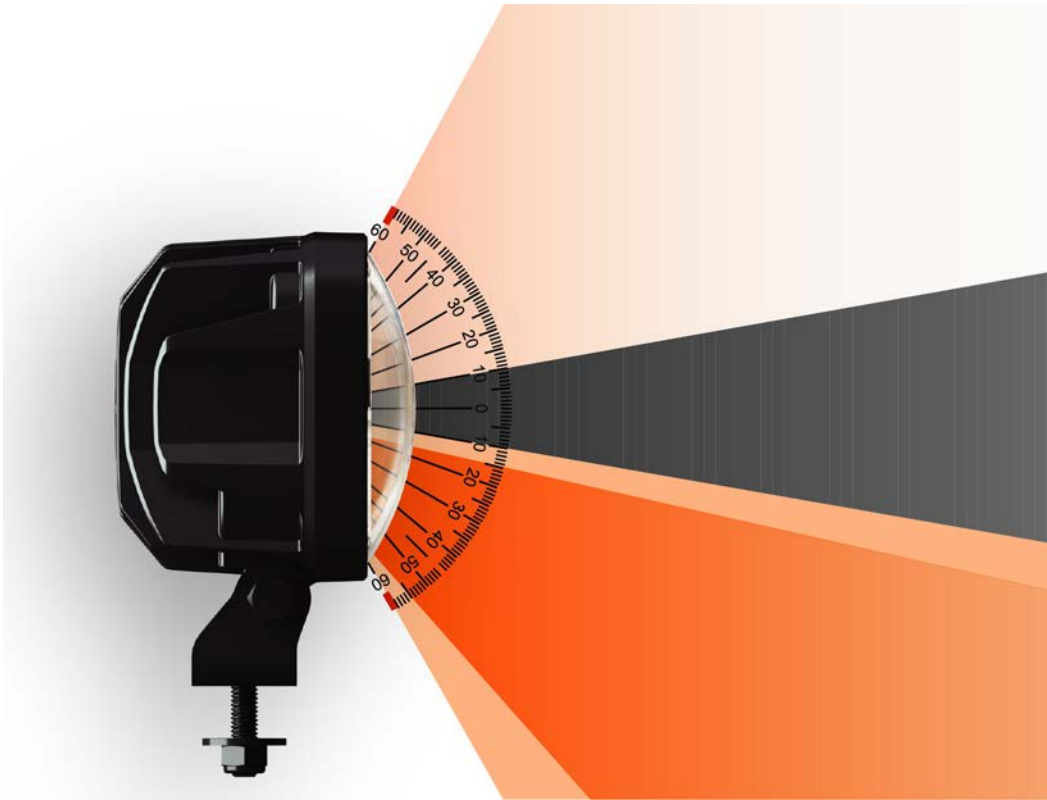

### **ACCENT LIGHTING**

Soft illumination upwards as a guide light for successful lifting or other operations.

### **GLARE FREE ZONE**

Will not blind people working near the vehicle.

### **TASK LIGHTING**

Effectively illuminating the work area.

Maximum safety and high visibility with light focused on desired areas.

# GO SERIES




## SCORPIUS GO


Our entry-level Scorpious GO is easy to use. There are four light pattern options: flood, wide flood, high beam, and reverse. Useful in construction, forestry, agriculture, and material handling, the Scorpious product family has a square form factor and pedestal mounting. The light produces zero emissions (EMC CISPR 25 class 5) and its light output is up to 3000 lumens.




## SCORPIUS GO 410

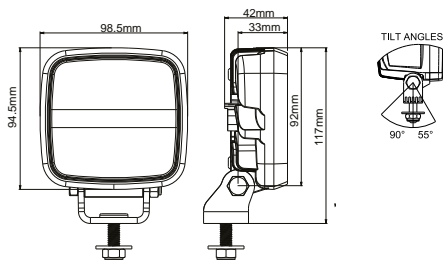

## SCORPIUS GO 420




## SCORPIUS GO 430

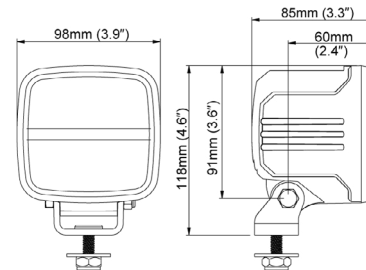


**CANIS GO**

Our entry-level Canis GO is as good as it gets. While it is lighter than the original, the operational lumen output is just as high. Best suited to construction, forestry, agriculture, and material handling, the Canis GO has a round form factor and pedestal mounting, it produces zero emissions (EMC CISPR 25 class 5) and its light output is up to 1800 lumens.

**CANIS GO 410**

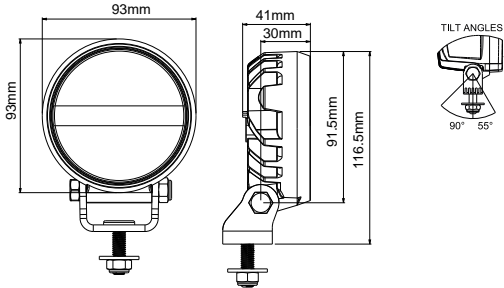


**CANIS GO 420**



**SATO GO**

Our entry-level Sato GO is a quality solution offering effective illumination. There are two light pattern options: flood and wide flood. Best suited to construction, forestry, and agriculture, the Sato GO has an oval form factor and pedestal mounting. It produces zero emissions (EMC CISPR 25 class 5) and its light output is up to 2300 lumens.

**SATO GO 610 & 625**

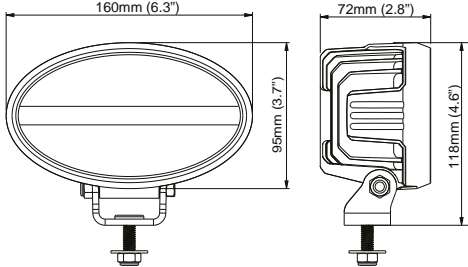





TECHNICAL SPECIFICATIONS	SCORPIUS GO 410	SCORPIUS GO 420
Theoretical / Operational Lumens:	1600lm / 1000lm	2800lm / 1800lm
Color Temperature:	5000K	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V, 36V, 48V / 30–64V (Dimmable)	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	16W (12/24V), 18W (36/48V)	28W
Nominal Current:	0.38A@36V, 48V / 0.6A@24V / 1.05A@12V	1.0A@24V / 1.8A@12V
Mount:	Single Bolt M8	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8Grms 24-2000Hz	8Grms 24–2000Hz
IP Rating:	IP68, IP6K9K	IP68, IP6K9K
Weight:	0.6kg	0.6kg
Operating Temperatures:	–40°C... +85°C (Overheat protected)	–40°C... +85°C (Overheat protected)

**LIGHT PATTERNS**


**Scorpius GO 410, 1000lm Wide Flood**




**Scorpius GO 410, 1000lm Flood**




**Scorpius GO 410 R, 1000lm Reverse (ECE R23)**




**Scorpius GO 420, 1800lm High Beam**



**Scorpius GO 420, 1800lm Wide Flood**



**Scorpius GO 420, 1800lm Flood**







TECHNICAL SPECIFICATIONS	SCORPIUS GO 430
Theoretical / Operational Lumens:	4800lm / 3000lm
Color Temperature:	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	44W
Nominal Current:	1.5A@ 24V / 2.8A@12V
Mount:	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated
Shock:	60G
Vibration:	8Grms 24–2000Hz
IP Rating:	IP68, IP6K9K
Weight:	0.79kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


### Scorpius GO 430, 3000lm High Beam

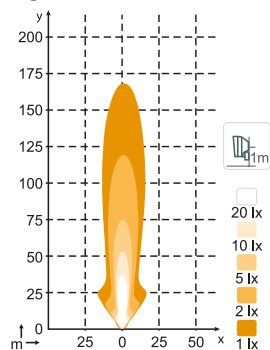

### Scorpius GO 430, 3000lm Wide Flood



### Scorpius GO 430, 3000lm Flood







TECHNICAL SPECIFICATIONS	CANIS GO 410	CANIS GO 420
Theoretical / Operational Lumens:	1600lm / 1000lm	2800lm / 1800lm
Color Temperature:	5000K	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V, 36V, 48V / 30–64V (Dimmable)	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	16W (12/24V), 18W (36/48V)	28W
Nominal Current:	0.38A@36V, 48V / 0.6A@24V / 1.05A@12V	1.0A@24V / 1.8A@12V
Mount:	Single Bolt M8	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8Grms 24–2000Hz	8Grms 24–2000Hz
IP Rating:	IP68, IP6K9K	IP68, IP6K9K
Weight:	0.5kg	0.5kg
Operating Temperatures:	–40°C... +85°C (Overheat protected)	–40°C... +85°C (Overheat protected)

**LIGHT PATTERNS**


**Canis GO 410, 1000lm  
Wide Flood**




**Canis GO 410, 1000lm  
Flood**




**Canis GO 420, 1800lm  
High Beam**




**Canis GO 420, 1800lm  
Wide Flood**



**Canis GO 420, 1800lm  
Flood**



**Canis GO 410 R, 1000lm  
Reverse (ECE R23)**











TECHNICAL SPECIFICATIONS	SATO GO 610	SATO GO 625
Theoretical / Operational Lumens:	1600lm / 1000lm	3600lm / 2300lm
Color Temperature:	5000K	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V (Dimmable)	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	16W	39W
Nominal Current:	0.6A@24V / 1.05A@12V	1.4A@24V / 2.5A@12V
Mount:	Single Bolt M8	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8Grms 24–2000Hz	8Grms 24–2000Hz
IP Rating:	IP68, IP6K9K	IP68, IP6K9K
Weight:	0.8kg	0.8kg
Operating Temperatures:	–40°C... +85°C (Overheat protected)	–40°C... +85°C (Overheat protected)

**LIGHT PATTERNS**


**Sato GO 610, 1000lm  
Wide Flood**




**Sato GO 610, 1000lm  
Flood**



**Sato GO 625, 2300lm  
Wide Flood**




**Sato GO 625, 2300lm  
Flood**





# KL SERIES

## MEASUREMENTS

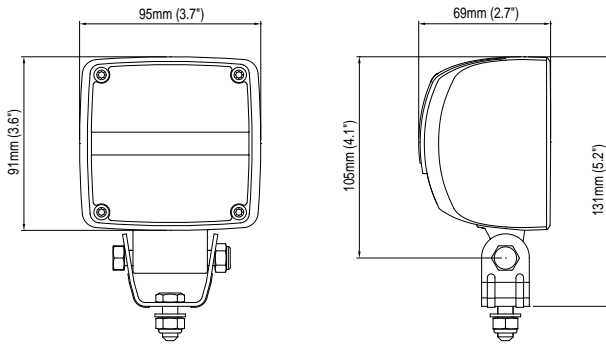

## THE AFFORDABLE ONE

The KL work lights are an excellent choice when you're in need of an upgrade, whether replacing halogen work lights with LEDs or looking for a cost-effective alternative for your heavy-duty equipment. This go-to product line is developed with both new and existing customers in mind, optimizing basic design and low-maintenance. This series offers lights with bracket mounting and with surface mounting on vehicle bodies. Light output in the series ranges from 300 to 2150 lumens.









TECHNICAL SPECIFICATIONS	KL1001 LED	KL1002 LED
Theoretical / Operational Lumens:	1600lm / 1000lm	2400lm / 1500lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V (Dimmable)	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	24W	24W
Nominal Current:	1.0A@24V / 2.0A@12V	1.0A@24V / 2.0A@12V
Mount:	Single Bolt M8	Single Bolt M8
Connector:	Fly Leads, Pigtail Deutsch 2-pin	Fly Leads, Pigtail Deutsch 2-pin
EMC:	CISPR 25 Class 5, EN 12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN 12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	N/A	N/A
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	0.7kg	0.7kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

**LIGHT PATTERNS**


**KL1001 1000lm Flood**




**KL1001 800lm Diffused**



**KL1002 1500lm Flood**



**KL1002 1200lm Diffused**









TECHNICAL SPECIFICATIONS	KL1401 LED	KL1501 LED
Theoretical / Operational Lumens:	3200lm / 2150lm	500lm / 300lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–16V, 18–32V (Dimmable)	12–24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	42W	10W
Nominal Current:	1.7A@24V / 3.5A@12V	0.4A@24V / 0.8A@12V
Mount:	Single Bolt M10	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8Grms 24–2000Hz	8Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	0.9kg	0.2kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

LIGHT PATTERNS






KL1401, 2150lm  
Wide Flood



KL1401, 2150lm  
Flood



KL1501 300lm  
Flood









TECHNICAL SPECIFICATIONS	KL2001 LED
<b>Theoretical / Operational Lumens:</b>	1900lm / 1200lm
<b>Color Temperature:</b>	5700K
<b>Nominal / Input Voltage DC:</b>	12–24V / 9–16V, 18–32V (Dimmable)
<b>Power Consumption:</b>	20W
<b>Nominal Current:</b>	0.8A@24V / 1.7A@12V
<b>Mount:</b>	Single Bolt M10
<b>Connector:</b>	Built-in Deutsch DT-2 (2-pin)
<b>EMC:</b>	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
<b>Electronics:</b>	Isolated
<b>Shock:</b>	60G
<b>Vibration:</b>	8Grms 24–2000Hz
<b>IP Rating:</b>	IP68, IP6K9K, SAE J1455
<b>Weight:</b>	0.5kg
<b>Operating Temperatures:</b>	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS



**KL2001 1200lm  
Wide Flood**



**KL2001 1200lm  
Flood**



**KL2001 900lm  
Diffused**




# KL FLUSH MOUNT







TECHNICAL SPECIFICATIONS	KL1302 LED F7°
<b>Theoretical / Operational Lumens:</b>	2400lm / 1500lm
<b>Color Temperature:</b>	5700K
<b>Nominal / Input Voltage DC:</b>	12–24V / 9–16V, 18–32V (Dimmable)
<b>Power Consumption:</b>	24W
<b>Nominal Current:</b>	1.0A@24V / 2.0A@12V
<b>Mount:</b>	Integrated
<b>Connector:</b>	Fly Leads Pigtail Deutsch 2-pin
<b>EMC:</b>	CISPR 25 Class 5, EN 12895, ISO 13766, ISO 14982, ISO 7637-2
<b>Electronics:</b>	Isolated
<b>Shock:</b>	60G
<b>Vibration:</b>	8Grms 24–2000Hz
<b>IP Rating:</b>	IP68, IP6K9K, SAE J1455
<b>Weight:</b>	0.45kg
<b>Operating Temperatures:</b>	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS & DRAWINGS

**KL1302, KL1304 1500lm  
Flood**



**KL1302, KL1304 1200lm  
Diffused**







TECHNICAL SPECIFICATIONS	KL1304 LED F0°	KL1305 LED F7° SNAP-IN
Theoretical / Operational Lumens:	2400lm / 1500lm	1300lm / 800lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–16V, 18–32V (Dimmable)	12–24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	24W	20W
Nominal Current:	1.0A@24V / 2.0A@12V	0.8A@24V / 1.7A@12V
Mount:	Integrated	Integrated
Connector:	Fly Leads Pigtail Deutsch 2-pin	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN 12895, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated	Isolated
Shock:	60G	60G
Vibration:	8Grms 24–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	0.45kg	0.5kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

LIGHT PATTERNS & DRAWINGS


KL1302, KL1304 1500lm Flood




KL1302, KL1304 1200lm Diffused





KL1305 800lm Flood



KL1305 800lm Wide Flood




KL1305 700lm Diffused

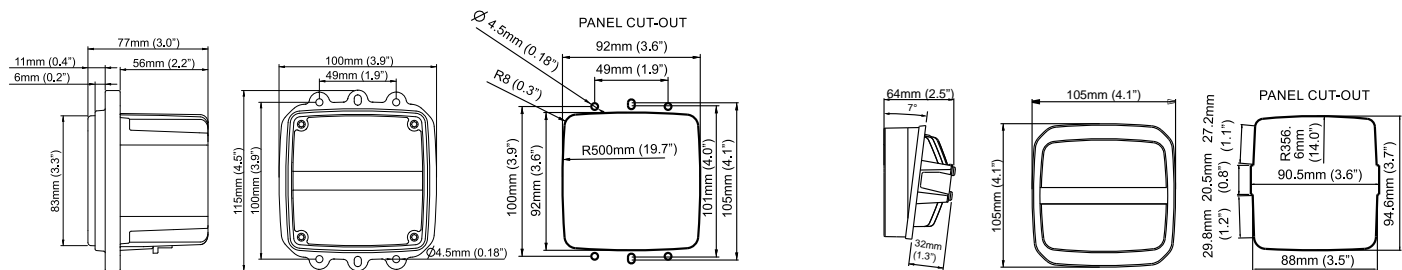

# SATO 725

## MEASUREMENTS

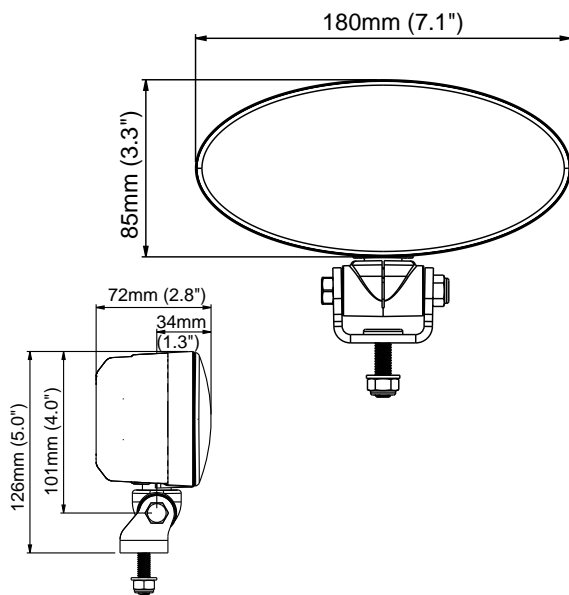

## READY FOR PRIME TIME

With a light pattern optimized for tractors and other agricultural vehicles, and a tempered glass lens for excellent chemical resistance, the Sato 725 is ready to hit the fields. Thanks to the perfect color rendering that allows you to see clearly and easily distinguish different materials, this work light will make your job easier and more efficient. Unwanted electrical interference will not compromise the operation of your vehicle as this light is ECE R10-approved. The hassle-free Sato 725 comes with a swivel bracket for easy adjustment of the light beam and is a plug-and-play replacement for other oval work lights on the market. An excellent fit for agriculture, the Sato 725 withstands vibration of up to 8 Grms at 5-2000Hz and delivers 2200 operational lumens.




TECHNICAL SPECIFICATIONS	SATO 725
Theoretical / Operational Lumens:	3500lm / 2200lm
Color Temperature:	5000K
Nominal / Input Voltage DC:	12V, 24V / 9-16V, 18-32V (Dimmable)
Power Consumption:	32W
Nominal Current:	1.4A@24V / 2.5A@12V
Mount:	Single Bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN 12895 , ISO 13766, ISO 14982, ISO 7637-2, ECE R10
Electronics:	Isolated
Vibration:	8Grms 5–2000Hz
IP Rating:	IP68, IP6K9K
Weight:	0.8kg
Operating Temperatures:	-40 to +85 °C (Overheat protected)




## LIGHT PATTERNS

Sato 725, 2200lm  
Flood



# GEMINI

## MEASUREMENTS

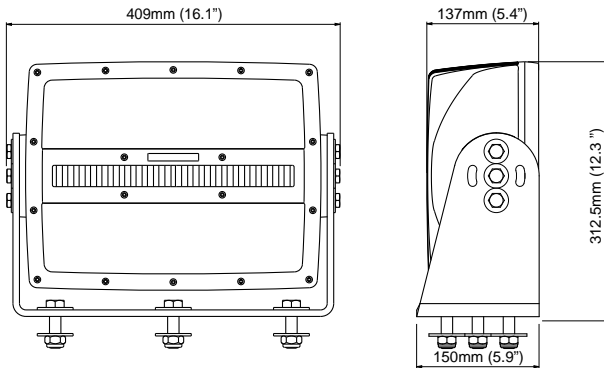

## THE KING OF THE HILL

This majestic light has no less than 60 LEDs and weighs 18 kg. The Gemini is mostly used in the mining industry and on bucket-wheel excavators. However, with an output ranging from 13 800 to 25 200 lumens, it also sees use illuminating harbors, generally mounted on harbor masts.









TECHNICAL SPECIFICATIONS	GEMINI LED N4701	GEMINI LED N4702
Theoretical / Operational Lumens:	40300lm / 25200lm	30000lm / 19200lm
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	24V / 18–32V	24V / 18–32V
Power Consumption:	300W	210W
Nominal Current:	12.5A@24V	8.8A@24V
Mount:	5 pcs Bolt M14x35	5 pcs Bolt M14x35
Connector:	2 x Built-in Deutsch DT-2 (2-pin)	2 x Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K
Weight:	18kg	18kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

LIGHT PATTERNS


**N4701 25200lm High Beam**

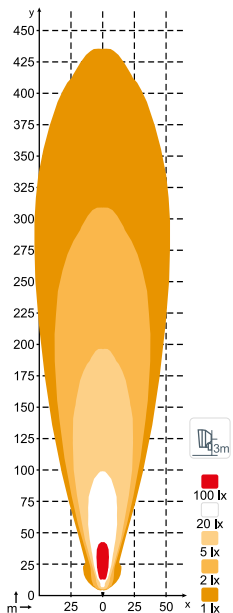


**N4701 25200lm Flood**




**N4701 20160lm Diffused**




**N4702, 19200lm High Beam**

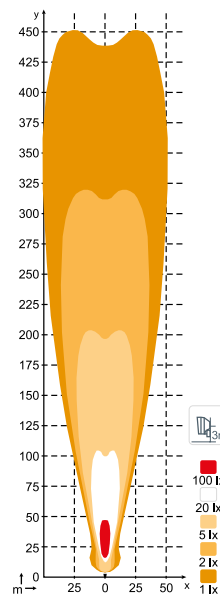

**N4702, 19200lm Flood**



**N4702, 15360lm Diffused**









TECHNICAL SPECIFICATIONS	GEMINI LED N4703
Theoretical / Operational Lumens:	22000lm / 13800lm
Color Temperature:	5700K
Nominal / Input Voltage DC:	24V / 18–32V
Power Consumption:	240W
Nominal Current:	10.0A@24V
Mount:	5 pcs Bolt M14x35
Connector:	2 x Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
IP Rating:	IP68
Weight:	18kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


N4703 13800lm  
Pencil Beam

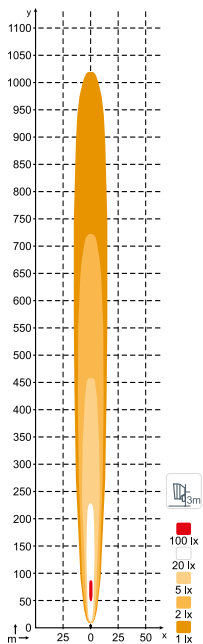

N4703 13800lm  
High Beam

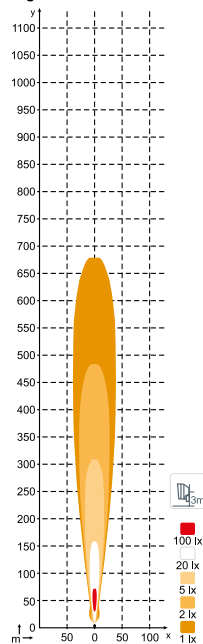


N4703 11040lm  
Diffused



# PICTOR PRO 830

## MEASUREMENTS

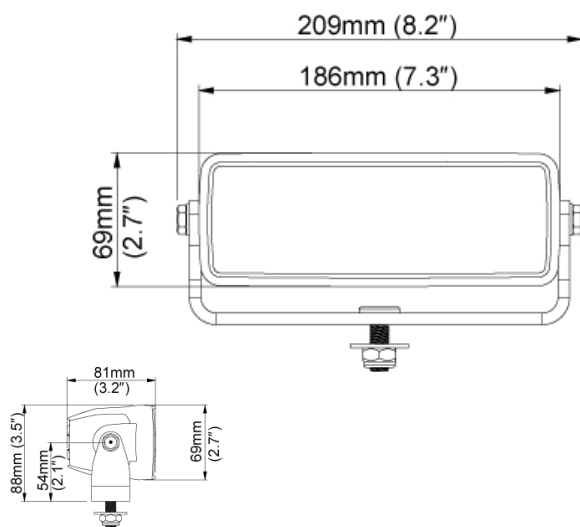

## JUST FLIP IT

The Pictor PRO 830 is here to become your new favorite work light. This adaptable light has a 180-degree tilt angle thanks to the smart design of the hard-wearing u-bracket. The low-profile Pictor PRO 830 is equipped with an asymmetric Wide Flood light pattern, making it truly versatile while giving you several different options for illumination, depending on the orientation of the intended point of fixture. Mount horizontal or vertical for different light patterns, and/or flip to suit your application. The tempered glass lens and tough aluminum body provides this heavy-duty work light with excellent resistance against the elements.




TECHNICAL SPECIFICATIONS	PICTOR PRO 830
Theoretical / Operational Lumens:	4800lm / 3000lm
Color Temperature:	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18–32V (Dimmable)
Power Consumption:	46W
Nominal Current:	1.6A@24V / 2.9A@12V
Mount:	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated
Shock:	60G
Vibration:	15.3Grms 24–2000Hz
Lens:	Glass
IP Rating:	IP68, IP6K9K
Weight:	1.3kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)




## LIGHT PATTERNS

**Pictor PRO 830, 3000lm**  
Wide Flood RH (Asymmetric)




**Pictor PRO 830, 3000lm**  
Wide Flood (Asymmetric)



# PICTOR 620

## MEASUREMENTS

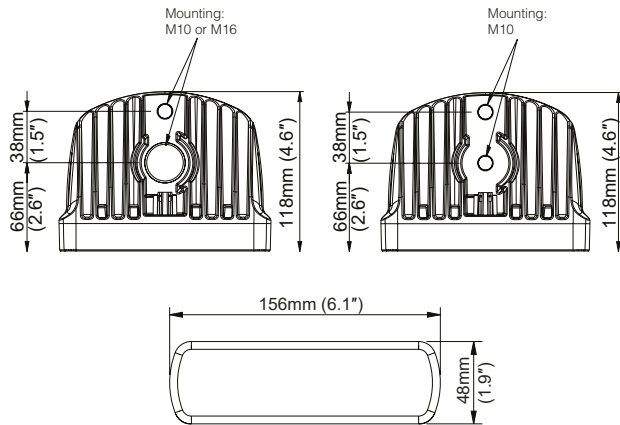

## EXTREME PRECISION LIGHTING

With this you'll be sure to hit the bullseye. Pictor 620 is designed to be mounted on equipment booms or vehicle bodies for optimized and targeted illumination of a specific work area. Thanks to its compact and clever design, this low-profile work light is unbeatable in durability, able to withstand roughness along its edges and the odd bump in the corners. The mechanical, thermal and corrosion resistance of Pictor 620 is excellent. Used in the construction, forestry and mining industries, it is particularly suitable for excavators, telehandlers and other equipment with a boom.



TECHNICAL SPECIFICATIONS	PICTOR 620
Theoretical / Operational Lumens:	2700lm / 1800lm
Color Temperature:	5000K
Nominal / Input Voltage DC:	12V, 24V / 9–16V, 18-32V (Dimmable)
Power Consumption:	28W
Nominal Current:	1.0A@24V / 2.0A@12V
Mount:	M10 or M16
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 14982, ISO 13766, ISO 13309, ISO 11452-2, ISO 7637-2, EN 61000-4-2, ISO 14982, EN 12985
Electronics:	Isolated
Shock:	60G
Vibration:	15.3Grms 24–2000Hz
Lens:	Grilamid® (registered trademark of EMS-GRIVORY)
IP Rating:	IP68, IP6K9K
Weight:	0.7kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)



TT DS (Top Top)  
Light Pattern: Downstream




TD US (Top Down)  
Light Pattern: Upstream




## LIGHT PATTERNS


**Pictor 620, 1800lm  
Flood LH US**




**Pictor 620, 1800lm  
Flood RH US**



**Pictor 620, 1800lm  
Flood TD US**




**Pictor 620, 1800lm  
Flood TT DS**



# TAURUS

## MEASUREMENTS

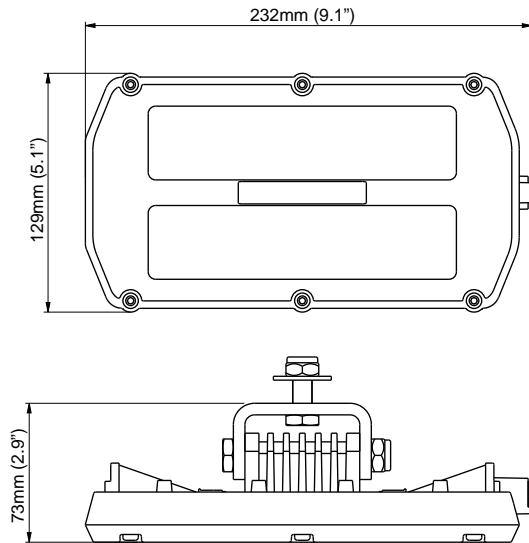

## NO BLIND SPOTS

Ideal for illuminating short distances, the Taurus is used primarily in engine rooms. A white plastic cover ensures that those working in its beam will not be blinded. The light pattern is designed to minimize shadows. The Taurus has no less than 54 LEDs and a light output of 1950 lumens.




TECHNICAL SPECIFICATIONS	TAURUS LED N7201
Theoretical / Operational Lumens:	3100lm / 1950lm
Color Temperature:	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V
Power Consumption:	30W
Nominal Current:	1.25A@24V / 2.5A@12V
Mount:	Single Bolt M10
Connector:	Built-in Deutsch DT-2 (2-pin) (left or right)
EMC:	CISPR 25 Class 3, ISO 13766, ISO 14982, ISO 7637-2
Shock:	60G
Vibration:	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455
Weight:	1.3kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)




## LIGHT PATTERNS

N7201 1950lm  
Diffused




# VELA

## MEASUREMENTS

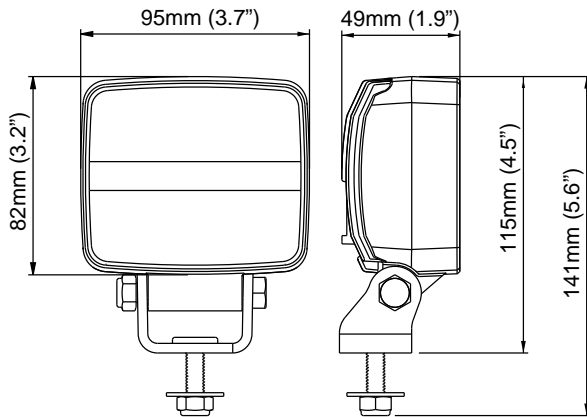

## STATE-OF-THE-ART WARNING LIGHT

Vela is our innovative safety light that uses isolated, integrated electronics as the cornerstone of its performance. With its light output of 150 lumens and wavelength of 470 nanometers, it produces a focused blue light that is very useful for illuminating dangerous situations. Whether used on a forklift in a warehouse as an early warning light for approaching vehicles or as a warning light on a tractor, you can be assured that this premium light will fulfil its purpose, making your work environment safer and more efficient.

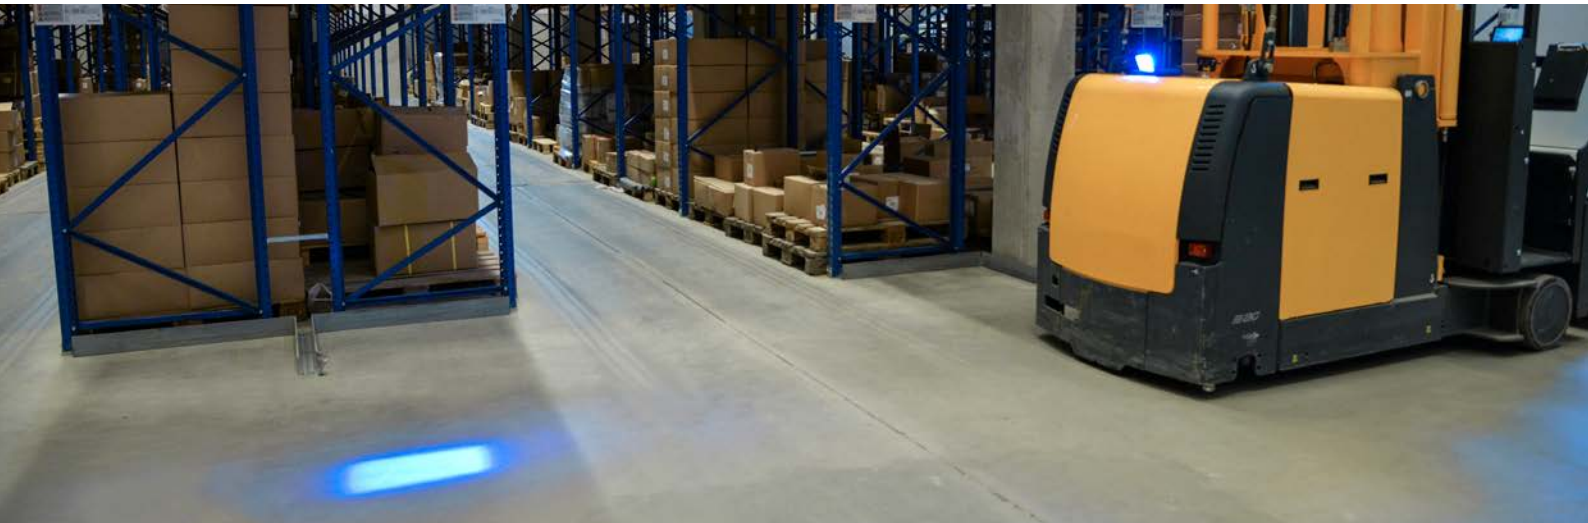




TECHNICAL SPECIFICATIONS	N2201 BLUE
Light Color:	Blue (470nm)
Nominal / Input Voltage DC:	12–48 V / 9–68V
Power Consumption:	16W
Nominal Current:	0.3A@48V / 0.7A@ 24V / 1.4A@12V
Mount:	Single bolt M8
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Electronics:	Isolated
Shock:	60G
Vibration:	8Grms 24–2000Hz
Weight:	0.5kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)



## LIGHT PATTERNS


### N2201

#### Spot



# CORONA 400

## MEASUREMENTS

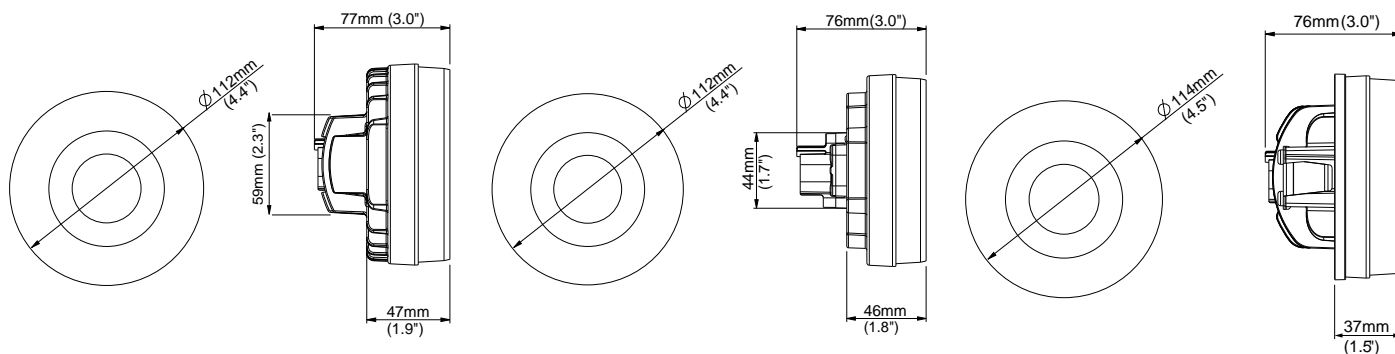

## THE CONTEMPORARY TAIL LIGHT

The Corona 400 delivers four functions: direction indicator, position light, stop light and reverse light, and is the first LED tail light on the market that integrates all four functions in one unit. Thanks to its funky and compact design, this low-profile tail light is both good-looking and durable. With the Corona 400 you'll get the automotive look, but with heavy-duty standards and a vibration resistance capacity of 15.3 Grms.




\*External cooling needed

TECHNICAL SPECIFICATIONS	CORONA 400	CORONA 400 INTEGRATED	CORONA 400 SNAP-IN
<b>Nominal / Input Voltage DC:</b>	12V, 24V / 9–32V	12V, 24V / 9–32V	12V, 24V / 9–32V
<b>Power Consumption: 12 / 24 V</b>	Direction indicator 21W Position light 0.2 / 0.5W Stop light 1.5 / 3.0W Reverse light 2.0 / 4.0W	Direction indicator 21W Position light 0.2 / 0.5W Stop light 1.5 / 3.0W Reverse light 2.0 / 4.0W	Direction indicator 21W Position light 0.2 / 0.5W Stop light 1.5 / 3.0W Reverse light 2.0 / 4.0W
<b>Nominal current: 12 / 24 V</b>	Direction indicator 1.5A / 0.75A Position light 15 mA Stop light 110 mA Reverse light 130 mA	Direction indicator 1.5A / 0.75A Position light 15 mA Stop light 110 mA Reverse light 130 mA	Direction indicator 1.5A / 0.75A Position light 15 mA Stop light 110 mA Reverse light 130 mA
<b>Mount:</b>	3 pcs screw M4	3 pcs screw M4	Snap-in
<b>Connector:</b>	Built-in Deutsch DT-6 (6-pin)	Built-in Deutsch DT-6 (6-pin)	Built-in Deutsch DT-6 (6-pin)
<b>EMC:</b>	CISPR 25 Class 5, EN 13309, EN 61000-4-2, ISO 14982-2, ISO 13766, ISO 11452, ISO 7637-2, ISO 10605	CISPR 25 Class 5, EN 13309, EN 61000-4-2, ISO 14982-2, ISO 13766, ISO 11452, ISO 7637-2, ISO 10605	CISPR 25 Class 5, EN 13309, EN 61000-4-2, ISO 14982-2, ISO 13766, ISO 11452, ISO 7637-2, ISO 10605
<b>Approvals:</b>	ECE	ECE	ECE
<b>Electronics:</b>	Isolated	Isolated	Isolated
<b>Shock:</b>	60G	60G	60G
<b>Vibration:</b>	15.3Grms 24–2000Hz	15.3Grms 24–2000Hz	15.3Grms 24–2000Hz
<b>IP Rating:</b>	IP68, IP6K9K	IP68, IP6K9K	IP68, IP6K9K
<b>Weight:</b>	0.5kg	0.5kg	0.5kg
<b>Operating Temperatures:</b>	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)



# DORADO

## MEASUREMENTS

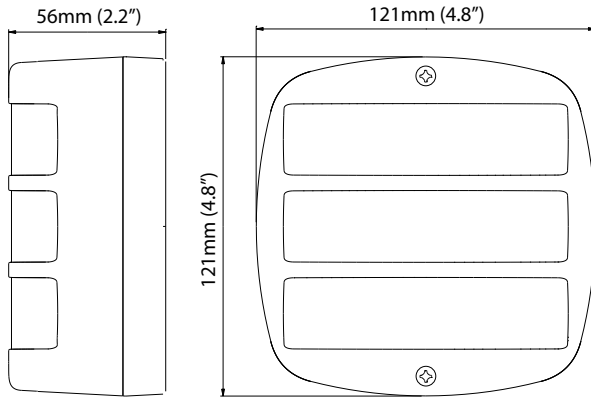

## THE VERSATILE LIGHT

We aim for versatility. This tail light combines tail, stop, and indicator lights all in one unit and can be mounted on most vehicles. Mounting is a snap since this is a tell-tale compatible light, just plug & play. The Dorado is durable against both vibration and shock.




TECHNICAL SPECIFICATIONS	DORADO N70
<b>Nominal / Input Voltage DC:</b>	12V, 24V / 8–32V
<b>Power Consumption:</b>	Brake 1.4W Indicator 1.4W Tail 0.4W Tell-tale 24V: Indicator 18W
<b>Nominal Current at 12V:</b>	Brake 116mA Indicator 116mA Tail 34 mA
<b>Nominal Current at 24V:</b>	Brake 58mA Indicator 58mA Tail 17mA Tell-tale: Indicator 750mA
<b>Mount:</b>	M6x25 2pcs
<b>Connector:</b>	4 pin Male Terminal 6.3 x 0.8
<b>EMC:</b>	EN 12895, ISO 13766, ISO 14982, ISO 7637-2
<b>Electronics:</b>	Isolated (Epoxy Encapsulated)
<b>Shock:</b>	60G
<b>Vibration:</b>	20Grms 24–2000Hz
<b>Weight:</b>	0.4kg
<b>Operating Temperatures:</b>	-40°C... +85°C (Overheat protected)



# BUMBLEBEE

## MEASUREMENTS

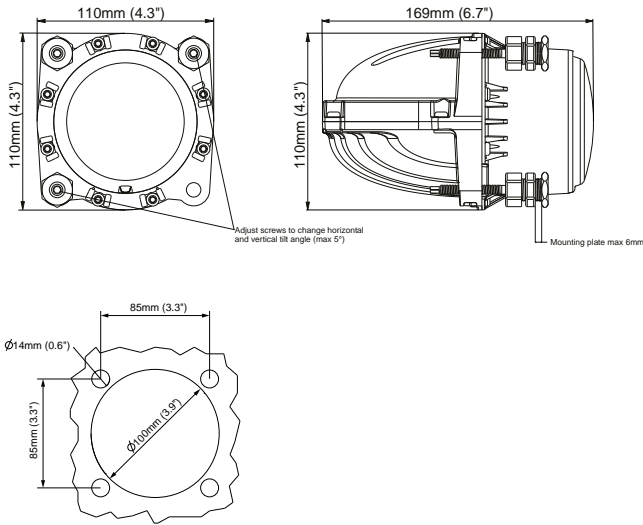

## THE BUZZER

The Bumblebee headlight module delivers an even, streak-free light pattern that greatly improves the driver's vision. This ECE-approved headlight module comes in high beam and low beam versions, specifically designed and optimized for heavy-duty vehicles. Thanks to the well-balanced color temperature, the driver will stay alert longer. The Bumblebee's exceptional light output in combination with the long light range places it among the top of the currently available options on the market.




TECHNICAL SPECIFICATIONS	BUMBLEBEE
Color Temperature	5800K
Nominal / Input Voltage DC:	12V, 24V / 9–32V
Power Consumption: 12 / 24 V	High Beam 17W Low Beam 17W
Nominal current: 12 / 24 V	High Beam 0.75A @24V / 1.5A@12V Low Beam 0.75A @24V / 1.5A@12V
Mount:	3 pcs M6 Screw
Connector:	Built-in Deutsch DT-2 (2-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2, ISO 10605, ISO 11452, EN 61000-4-2, EN 13309
Approvals:	ECE
Electronics:	Isolated
Shock:	60G
Vibration:	6Grms 24-2000Hz
IP Rating:	IP68, IP6K9K
Weight:	0.95kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)




## LIGHT PATTERNS


**Bumblebee  
High Beam**

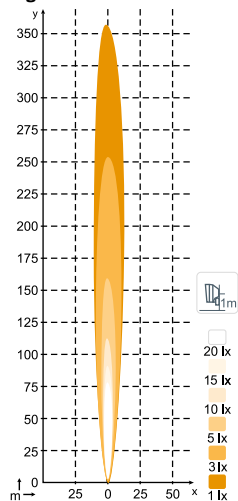

**Bumblebee  
Low Beam, RHT**






**Bumblebee  
Low Beam (Symmetric)**



# CUE

## MEASUREMENTS

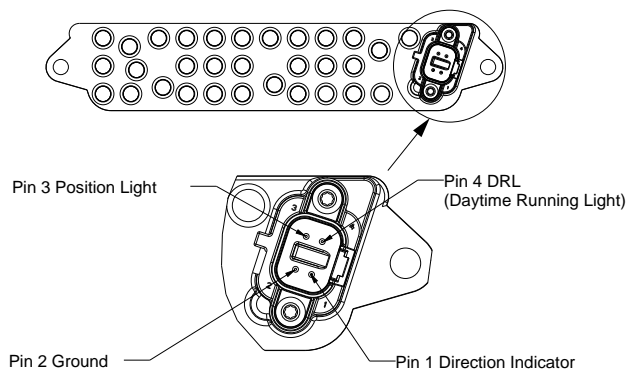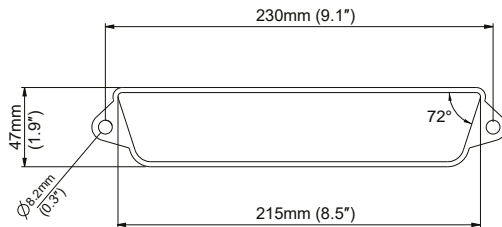

## THE HEAD-TURNER

The CUE is a cool front combination light giving you the design freedom you need. All set for future demands, this front light combines a daytime running light, position light and direction indicator into a sleek package with a soft, even light. CUE's ingenious 360° cooling system makes it the world's first front combination light suitable for mounting at any vertical angle. Look stylish and remain visible on and off the road with the ECE-approved CUE.




TECHNICAL SPECIFICATIONS	CUE
Operational Lumens Output:	500lm DRL
Nominal / Input Voltage:	24V / 18–32V
Power Consumption 28V:	DRL 11W Position light 2W Direction indicator 15W
Nominal Current:	DRL 0.45A Position light 0.06A Direction indicator 0.6A
Mount:	2 pcs M8 Screw
Connector:	Built-in Deutsch DT-4 (4-pin)
EMC:	CISPR 25 Class 5, ISO 13766, ISO 14982-2, ISO 7637-2, ISO 10605, ISO 11452, EN 61000-4-2, EN 13309
Approvals:	ECE
Electronics:	Isolated
Shock:	60G
Vibration:	9.8Grms 24-1000Hz
Weight:	0.5kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)



# SCULPTOR

## MEASUREMENTS

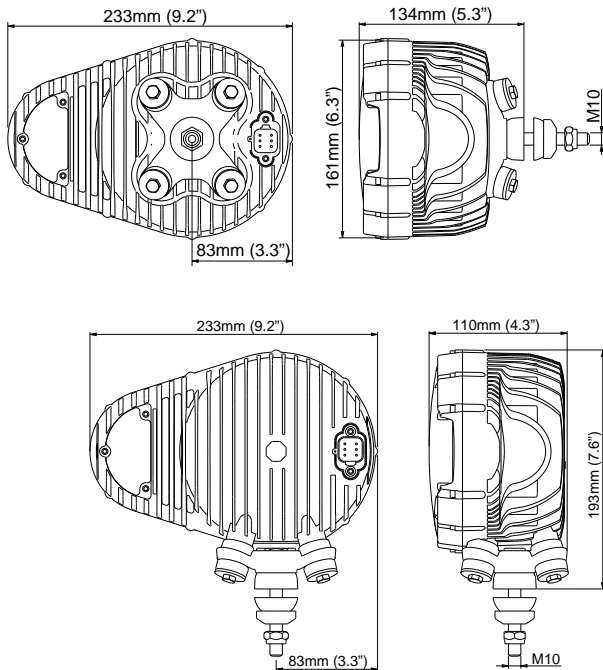

## ALL-IN-ONE DURABLE HEADLIGHT

The Sculptor driving light integrates headlight, indicator, and parking lights in one unit. Unbeatable in its durability, this light is equipped with our integrated **QUAKE** dampening system. The combination headlight withstands shocks of 60G and vibration of 15.3 Grms at 24–2000 Hz. This combination light with pedestal or rear mounting is very useful in agricultural, construction, and trucking applications. It has a dual-beam function with both dipped and full beams, which offers any vehicle using this light an amazing advantage.







TECHNICAL SPECIFICATIONS	SCULPTOR N6001 QD	SCULPTOR LED N6002 QD
Color Temperature:	5700K	5700K
Nominal / Input Voltage DC:	12–24V / 9–32V	12–24V / 9–32V
Power Consumption: 12 / 24V	High Beam 34W, Low Beam 17W, Park 2.7W, Indicator 17.5W	High Beam 34W, Low Beam 17W, Park 2.7W, Indicator 17.5W
Nominal Current: 12 / 24V	High Beam 1.4A@24V / 2.8A@12V Low Beam 0.7A@24V / 1.4A@12V	High Beam 1.4A@24V / 2.8A@12V Low Beam 0.7A@24V / 1.4A@12V
Mount:	Single Bolt M10	Single Bolt M10
Connector:	Built-in Deutsch DT-6 (6-pin)	Built-in Deutsch DT-6 (6-pin)
EMC:	CISPR 25 Class 3, EN 13309, EN 61000-4-2, ISO 14982-2, ISO 13766, ISO 11452, ISO 7637-2, ISO 10605	CISPR 25 Class 3, EN 13309, EN 61000-4-2, ISO 14982-2, ISO 13766, ISO 11452, ISO 7637-2, ISO 10605
Approvals:	ECE	ECE
Shock:	60G	60G
Vibration:	15.3Grms 24–2000Hz	15.3Grms 24–2000Hz
IP Rating:	IP68, IP6K9K, SAE J1455	IP68, IP6K9K, SAE J1455
Weight:	2.5kg	2.5kg
Operating Temperatures:	-40°C... +85°C (Overheat protected)	-40°C... +85°C (Overheat protected)

## LIGHT PATTERNS


**N60XX ECE**  
High Beam RHT

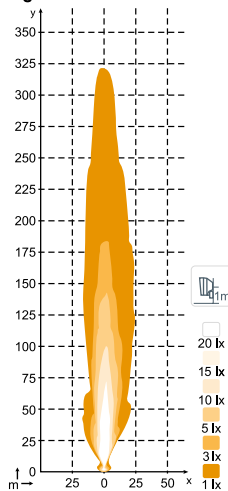


**N60XX ECE**  
High Beam LHT

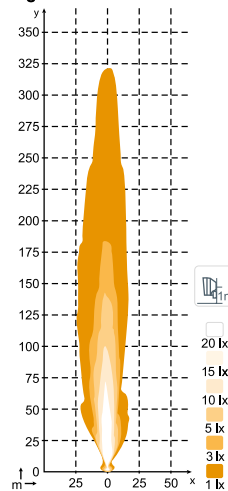

**N60XX ECE**  
Low Beam RHT



**N60XX ECE**  
Low Beam LHT



### ECE Approvals:

Passing beam: ECE Regulation 112, class B for right & left hand traffic  
 Driving beam: ECE Regulation 112, class B, Reference number 25  
 Position light: ECE Regulation 7  
 Direction Indicator: ECE Regulation 6, class 1b (front)  
 Direction Indicator: ECE Regulation 6, class 5 (side)

## FRONT LIGHTS



PRODUCTS	N523 LED	N520 LED	N503 LED	N500 LED
Approvals:	ECE	ECE	ECE	ECE
Bulb:	H4	H4	H4	H4
Watt & Voltage:	60/55W@12V, 75/70W@24V	60/55W@12V, 75/70W@24V	60/55W@12V, 75/70W@24V	60/55W@12V, 75/70W@24V
Light Pattern:	High/Low Beam	High/Low Beam	High/Low Beam	High/Low Beam
Mount:	M10	M10	M10	M10
Electronics:	Isolated	Isolated	Isolated	Isolated
Vibration Dampening:	D	–	D	–



PRODUCTS	N523 HALOGEN	N520 HALOGEN	N503 HALOGEN	N500 HALOGEN
Approvals:	ECE	ECE	ECE	ECE
Bulb:	H4	H4	H4	H4
Watt & Voltage:	60/55W@12V, 75/70W@24V	60/55W@12V, 75/70W@4V	60/55W@12V, 75/70W@24V	60/55W@12V, 75/70W@24V
Light Pattern:	High/Low Beam	High/Low Beam	High/Low Beam	High/Low Beam
Mount:	M10	M10	M10	M10
Vibration Dampening:	D	–	D	–

Connectors: Pigtail Deutsch 6-pin, Built-in AMP 6-pin, Built-in Deutsch 6-pin, Grommet



## PRODUCT INFORMATION

Not all products are available in all markets. During continuous improvement specifications and design can change. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens color.

## WARRANTY

For full details of warranty terms and conditions, please visit: <https://www.nordiclights.com/terms-conditions/>

### ABBREVIATIONS

<b>D</b>	Dampening
<b>ECE</b>	European Unicon Traffic Regulations
<b>DS</b>	Downstream
<b>F</b>	Flushmount
<b>G</b>	Generation
<b>H</b>	Handle
<b>HS</b>	Handle & Switch
<b>LH</b>	Left Hand Mount
<b>QD</b>	Quake Dampening
<b>R</b>	Reverse
<b>RH</b>	Right Hand mount
<b>S</b>	Side mount
<b>SAE</b>	USA Traffic Regulations
<b>SD</b>	Super Dampening
<b>SP</b>	Single Power
<b>TD</b>	Suspended Pedestal mount (Top Down)
<b>TP</b>	Twin Power
<b>TT</b>	Upright Pedestal mount (Top Top)
<b>US</b>	Upstream
<b>V</b>	Version
<b>XD</b>	Extreme Heavy Duty Dampening
<b>PH</b>	Phenom Optics







**NORDICLIGHTS**

distributed by  
  
info@indemar.com

Giuseppe Monachella  
[gmonachella@indemar.com](mailto:gmonachella@indemar.com)  
[www.indemar.com](http://www.indemar.com)

