



## Daylight Fresnel 575W SE

### LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

# Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

## Daylight Fresnel 575W SE

### SPECIFICATIONS

Identity No.	L00575DS
Capacity	575W
Lamp Bulb Voltage	95V
Fresnel Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 575W/SE
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	6.4 kg
Weight (with barndoor)	7.0 kg

### ACCESSORIES

Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W or 800W/575W or 800W/575W AC/DC

Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

DC Y-Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø197mm (7-3/4 in.) :


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

### PHOTOMETRIC DATA

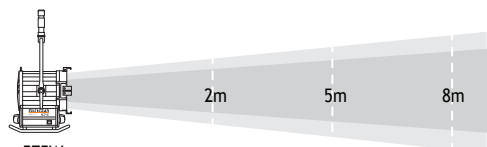

575W			
Spot (6°)			
Lux	68806	11009	4300
Beam Ø	0.21 m	0.52 m	0.84 m
Flood (55°)			
Lux	7020	1123	439
Beam Ø	2.08 m	5.21 m	8.33 m

### DIMENSIONS (mm)

