



Daylight Fresnel 1200W SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm (6-7/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 1200W SE

SPECIFICATIONS

Identify No.	L01200DS	
Capacity	1,200W	
Lamp Bulb Voltage	100V	
Fresnel Lens	Ø175mm	v(6-7/8 in.)
Lamp Type	MSR 1200HR or HMI 1200W/SE	
Color Temp.	5600K	
Lamp Holder	G38	
Stirrup	Ø28mm (1-1/8 in.) Spigot	
Class / IP Rating	1 / IP 23	
Max. Surface Temp.	180 °C	[356 °F]
Max. Ambient Temp.	45 °C	[113 °F]
Min. Distance to Illuminated Object	6 m	[20 ft]
Min. Distance to Flammable Object	0.5 m	[1.6 ft]
Operating Range	+45° ~ 0° ~ -45°	
Weight (lamphead)	9.7 kg	[21.4 lbs]
Weight (with barndoor)	10.7 kg	[23.5 lbs]

ACCESSORIES

Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W

Lamphead to Ballast Cable : 7m [23 ft.] or 15m [49 ft.]

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø229mm (9 in.):


Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

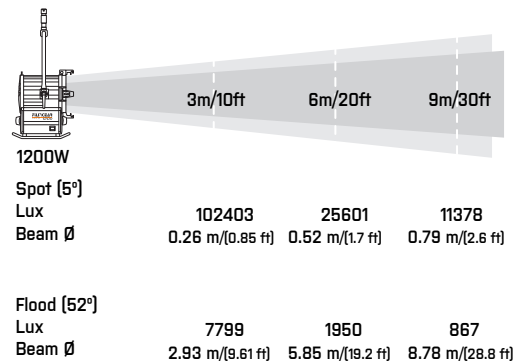

DIMENSIONS (mm)

