

HILS-RAF SERIES RGB Flood Light

Performance:

Weather Proof.

Energy saving product


24V DC

IP65 Rated

Aluminum Housing

16 Million color combinations

5 Year Warranty

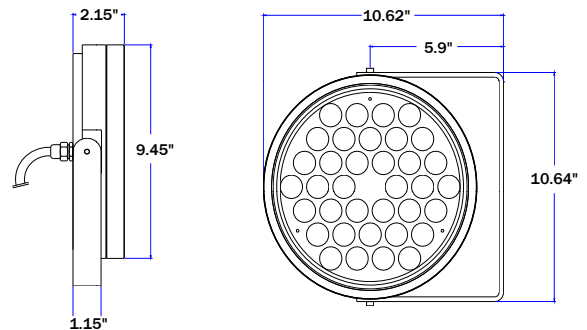

General Specification:

Parameter	Symbol	Ratings	Unit
Input Power	P _I	DC 24V	DCV
Power Consumption	P _D	48	W
Dimension	L × W	240 × 55	mm
Weight	W	4.5	kg
Operating Temperature	T _{opr.}	-25 ~ +55	°C
Storage Temperature	T _{stg.}	-30 ~ +80	°C

Electrical-Opto Characteristics:

Parameter	Symbol	Ratings	Unit
Lighting Color	C	R/G/B Full Color (16million)	lm
Wave Length	λ _D	Red 630, Green 525, Blue 470	nm
Luminous Flux	I _v	Red 204, Green 144, Blue 72	Lumen
Angle Sensitivity at 50%	2θ _{1/2}	10, 20	Deg.
Interface	-	DMX512, Electronic Data Signal	-