

## STL SERIES LED LINEAR STRIP

### Advantage:

UL &amp; cUL

DLC

120+ Lumens per watt

80+ CRI

AC 100V - 277V

Dimming driver

Surface and suspension mounting options

Suitable for damp location

5 Year warranty

Reduces energy up to 60%



### Accessories:

#### ZY-RJ (Joint Aligner)

Top housing aligner for continuous rows

#### ACC (Aircraft Cable)

10' Aircraft cable for suspension mount

#### LS4TWK (Wiring Kit)

Through wiring kit for continuous rows

#### CRD-6-P (Power feed)

6' Power feed cord

### Construction:

Reflector utilizes highly reflective powder coat finish. Diffuser lens provides even and consistent light while eliminating pixelation. Toolless removal of diffuser allows access to LED array. LED module and driver are replaceable.

### Electrical:

Luminaire utilizes long life, high efficacy LEDs and a highly efficient, reliable LED driver. 120V-277V input voltage for increased versatility. 0-10V continuous dimming comes standard.

### Ordering Guide


|              |   |              |   |         |   |  |   |               |   |
|--------------|---|--------------|---|---------|---|--|---|---------------|---|
| ZY           | / | ST           | / | 4FT/8FT | / | HL / LW / 24 / 36 / 40 / 42 / 48 / 56 / 68 | / | 4000K / 5000K | / |
| Company Code |   | Product Type |   | Length  |   | Wattage                                    |   | CCT           |   |

### Performance Data:


| Model      | Wattage | Lumens | LxWxD inch        |
|------------|---------|--------|-------------------|
| ZY-ST4FTLW | 24W     | 3120   | 48"x3.35"x3.56"   |
| ZY-ST4FTHL | 36W     | 4630   | 48"x3.35"x3.56"   |
| ZY-ST8FT42 | 42W     | 5460   | 95.9"x3.35"x3.56" |
| ZY-ST8FT48 | 48W     | 6240   | 95.9"x3.35"x3.56" |
| ZY-ST8FT56 | 56W     | 7280   | 95.9"x3.35"x3.56" |
| ZY-ST8FT68 | 68W     | 8840   | 95.9"x3.35"x3.56" |
| ZY-ST4FT40 | 40W     | 5200   | 48"x3.35"x3.56"   |
| ZY-ST4FT24 | 24W     | 3120   | 48"x3.35"x3.56"   |

### Mounting Options:


- 1 - Suspension Mount
- 2 - Surface Mount
- 3 - T-Bar Clip Mount

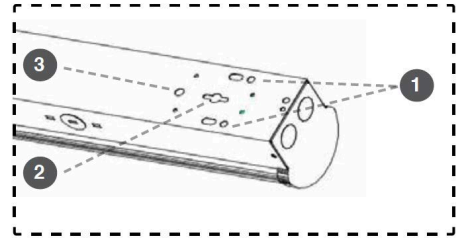

### Photometry:


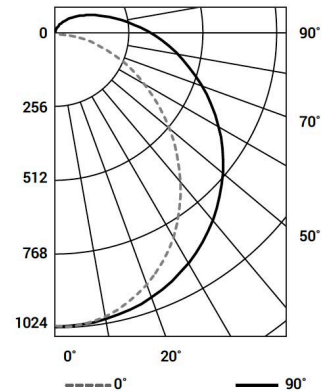


### Dimming Connection:

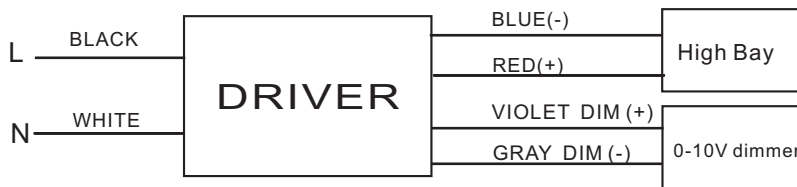

### Dimensions:

#### ZY-ST4

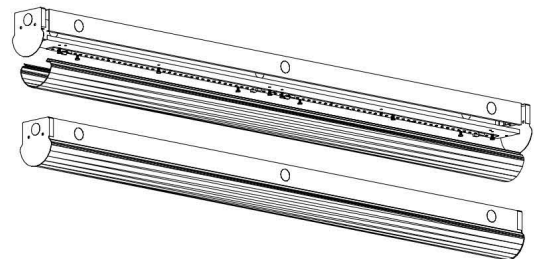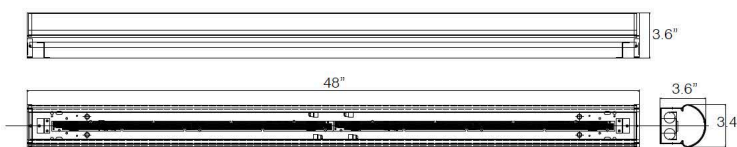

#### ZY-ST8

