

LED LIGHTING

Project Name: _ Fixture Schedule:

www.DigiLiteLED.com

STP SERIES LED VAPOR TIGHT

The LED Vapor Tight fixture is ideally used as utility lighting in parking garages, stairwells, and harsh environments. Perfect for dry or wet location applications.

FEATURES

- Stainless steelclips
- Optional 100% DR lens additive for impact resistance
- Built-in Constant Current LED Driver with High Efficient LED
- Suitable for ceiling mount or suspended mount
- Suitable for damp or dry environments
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- Rated IP65
- 5 Year Manufacturer's Warranty





DIMENSIONS



*Note: See Product Specification for exact dimensions.



26.3"/48.5"/50"

COMMON TECHNICAL DATA

Color Temperature	3000K-5000K	
Beam Angle	120° degrees	
CRI	>80	
Operation Temperature	-30°C to 40°C	
Lumen Efficiency	More than 135 LPW	
Input Voltage	100-277VAC	
Frequency	50-60Hz	
Power Supply Efficiency	90%	
Rated Life	50,000 hours	
Power Factor	More than 0.99	
LED Type	SMT 2835	
Housing	Aluminum & Plastic	

CERTIFICATIONS











WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. Digilite does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. Digilite reserves the right to alter specifications without prior notice.



Project Name: _____ Fixture Schedule: _____

LED LIGHTING

www.DigiLiteLED.com

STP SERIES


LED VAPOR TIGHT

PRODUCT SPECIFICATION

Product Number	Wattage	CCT	Lumens	Housing	Length x Width x Height
ZY-STP8132-24W	24W	3000K-5000K	3500	Plastic	26.3"x 6.5"x4.5"
ZY-STP8232-48W	48W	3000K-5000K	6830	Plastic	50"x 6.5"x 4.5"
ZY-STP8332-72W	72W	3000K-5000K	10200	Plastic	50"x10.5"x4.5"
ZY-STP8417-48W	48W	3000K-5000K	6820	Plastic	50"x 17.4"x 4.5"
ZY-STP8432-95W	95W	3000K-5000K	13250	Plastic	50"x17.4"x4.5"
ZY-STPA124-24W	24W	3000K-5000K	3500	Aluminum & Plastic	48.5"x 3.4"x 2.8"
ZY-STPA224-50W	50W	3000K-5000K	6840	Aluminum & Plastic	48.5"x4.1"x3"

ORDERING GUIDE

ZY	STPA/STP	8132-24W/8232-48W/8332-72W/8417-48W/8432-95W/124-24W/224-50W
Company Code	Housing Type	Wattage

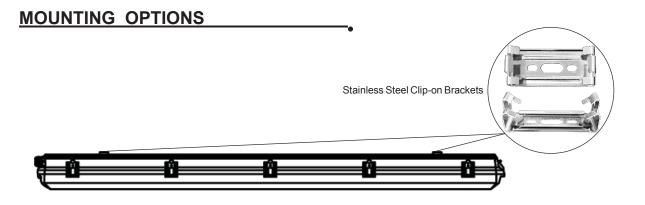

WIRING CONNECTION

