



# NIRVANA

## ALUMINIUM OPERABLE SHUTTER SYSTEM


### Why choose Nirvana?

Nirvana shutters are a stylish horizontal operable louvre solution offering a range of benefits such as enclosing an external void space, protection from natural elements or providing privacy to patio enclosures. Nirvana shutters are an entertainers dream, giving your project a stylish secluded sanctuary which can be enjoyed all year round.

Our aluminium shutters are built to the highest quality and are available in Pearl White or Surfmist powder coat finish. The high quality aluminium panels are supplied fully assembled and are easily installed in a void opening to a maximum of 3000mm high x 6000mm wide with U channels on all four sides. With wider void openings, multiple panels are installed side by side using a "H" joiner aluminium profile into which panels neatly push into.

Some benefits of Nirvana shutters include:

-  STRONG ALUMINIUM
-  REFLECTIVE
-  EASY INSTALLATION
-  HAND OPERABLE OPEN/CLOSE
-  CUSTOM MADE TO SIZE









Nirvana aluminium fixed panel operable louvre shutter system features horizontal elliptical blades which can be opened or closed by tilting up or down by hand. Shutters are joined by a tilt rod allowing the blades to move in unison.

COMPLETE SHUTTER PANEL WITH FRAME

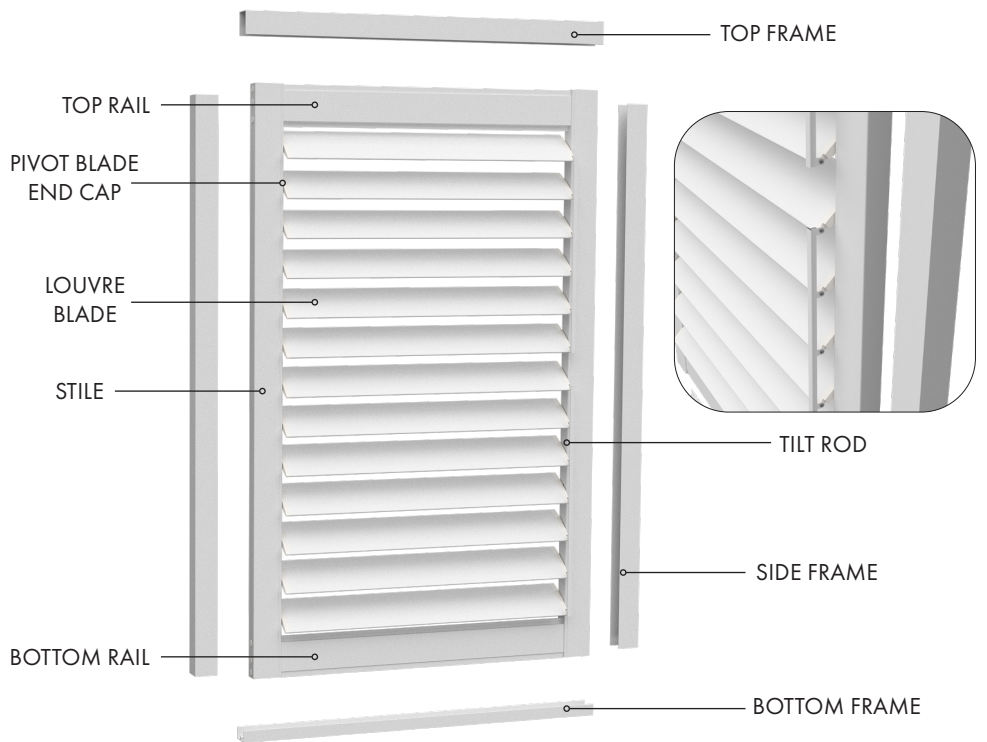

WATCH THE VIDEO

[www.glassoutlet.com.au/product-videos](http://www.glassoutlet.com.au/product-videos)

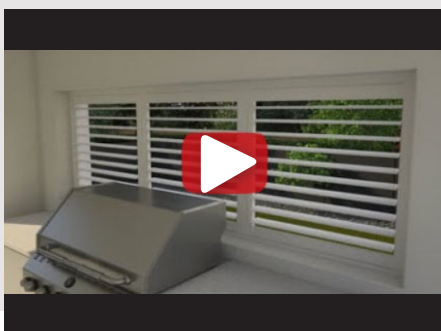

**EASY TO USE EXCEL ORDER FORM!**

**Order Form - Nirvana Operable Aluminium Shutters — V1.01-T1**

Colour: Pearl White

Layout	Opening Height (mm) <sup>1</sup>	Opening Width (mm) <sup>2</sup>	Tiltrod Position	Number of Openings at the Same Size	Qty of Panels Per Opening			Centre Support Rail Per Panel			Amount Ex GST
					Recommended Qty Panels Per Opening	Specify Per Panel Approx Width (mm)	Approx Panel Width (mm) <sup>3</sup>	Qty of Centre Rails	Specify Centre Rail Height (mm) <sup>4</sup>	Minimum Height (mm)	
A		Select					n/a	n/a			
B		Select					n/a	n/a			
C		Select					n/a	n/a			
D		Select					n/a	n/a			
E		Select					n/a	n/a			
Total Number of Openings: <input type="text" value="0"/>										Total Amount Ex GST	
										Total Area sqm	

<sup>1</sup> Opening Height between 500mm and 3000mm - refer 'Measuring Guide'  
<sup>2</sup> Opening Width between 350mm and 6000mm - refer 'Measuring Guide'  
<sup>3</sup> Tiltrod location is when viewed from inside of the property looking out  
<sup>4</sup> Per Panel Width : min 350mm and max 1200mm; includes framing allowance  
 Centre Support Rail height is measured from bottom of opening to middle of horizontal centre support rail  
 Centre Support Rail height may need to be adjusted ±40mm to suit louvres