

WDL-2700PVM


27" Public View Monitor



SPECIFICATION

Display	
Screen size	27"
Resolution	1920 × 1080
Brightness	300cd/m ²
Viewing angle	170(H) × 178(V)
Contrast ratio	1200:1
Aspect ratio	16:9
Response time	5ms (max 8ms)
Color system	NTSC/PAL multi (BNC 75Ω)
Camera	
Image sensor	1/2.8" SONY 2.38M progressive C-MOS
Lens	DC auto IRIS 2.8 ~ 12mm vari-focal
Frame rate	30fps
Backlight compensation	WDR [HDR]
Compression	H.264 @HP, MJPEG
Streaming	Simultaneous multiple streams H.264 streaming over, UDP,TCP,HTTP or HTTPS MJPEG streaming over HTTP or HTTPS
Resolution	1920 × 1080
Frame rate	up to 30fps @1080p
Interface	10/100 Mbps Ethernet, RJ-45
ONVIF	PROFILE S / version 2.2 support
Protocols pixel	IPv4, TCP/IP, HTTP, HTTPS, UPnP, BONJOUR RTP/RTSP, SMTP, FTP, DHCP, NTP, DNS, DDNS, SNMP
Users	8 clients monitoring at the same time
Security	Multi-level user access with password protection IP address filtering HTTPS encrypted data transmission
Firmware	Supports firmware upgrade
Dual booting	Support for firmware recovery
Factory reset	Restores to factory default settings
Operation system	Embedded linux

DIMENSIONS

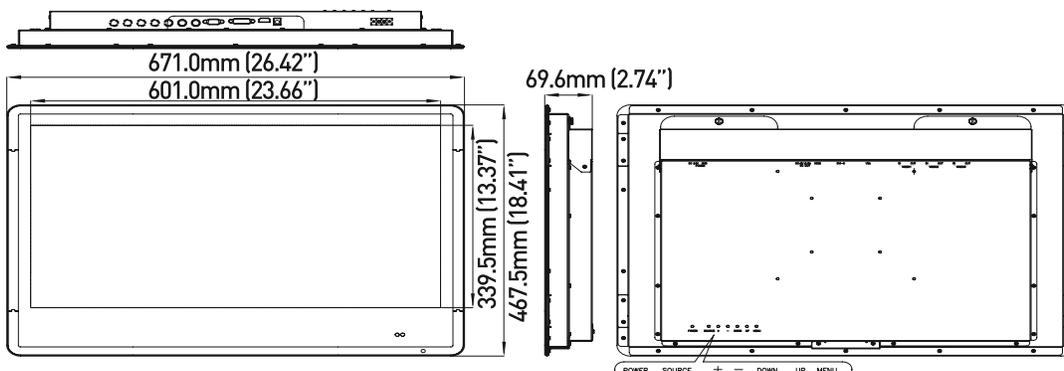

STANDARD LCD MONITORS

ANALOG PUBLIC VIEW MONITORS with BUILT-IN DVR

ANALOG PUBLIC VIEW MONITORS

IP PUBLIC VIEW MONITORS

SUNLIGHT VIEWABLE LCD MONITORS

TOUCH SCREEN LCD MONITORS

FLUSH MOUNT LCD MONITORS

RACK MOUNTABLE LCD MONITORS

WDL-2700PVM

27" Public View Monitor



Video Input/Output	
Video input	NTSC/PAL multi(BNC 75Ω) / D-SUB15P / DVI-D / HDMI connector
Video output	CVBS (BNC)
Power	
Power (Display)	DC 24V / 5A (100~240V AC/DC adaptor)
Power (Camera)	12V / 0.5A (for external camera)
Environmental	
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)
Humidity	10~90% RH, non condensing
Dimensions	
Dimensions	671.0(W) × 467.5(H) × 69.6(D)(mm)
Weight	T.B.D

FEATURES

- High quality and cost-effective
- LED backlight
- Supported OSD (On screen display) and control button
- IR remote control
- 3D comb. filter
- 3D video noise reduction
- 3D motion adaptive deinterlacer
- In/Out connector location - top side
- VESA wall mount - 100 × 100, 200 × 200