

# WDL-1900PVM-IP


19" IP Public View Monitor



## SPECIFICATION

Display	
Screen size	19"
Resolution	1280 × 1024
Brightness	250cd/m <sup>2</sup>
Viewing angle	170(H) × 160(V)
Contrast ratio	500:1
Aspect ratio	5:4
Response time	5ms (max 8ms)
Camera	
Image sensor	1/2.8" SONY 2.38M progressive C-MOS
Lens	2.9mm fixed lens
Active pixel	1920(H) × 1080(V)
Frame rate	30fps
Backlight compensation	WDR [HDR]
Video	
Compression	H.264 @HP, MJPEG
Streaming	Simultaneous multiple streams, H.264 streaming over UDP, TCP, HTTP or HTTPS, MJPEG streaming over HTTP or HTTPS
Resolution	1920 × 1080
Frame rate	up to 30fps @1080p

## DIMENSIONS

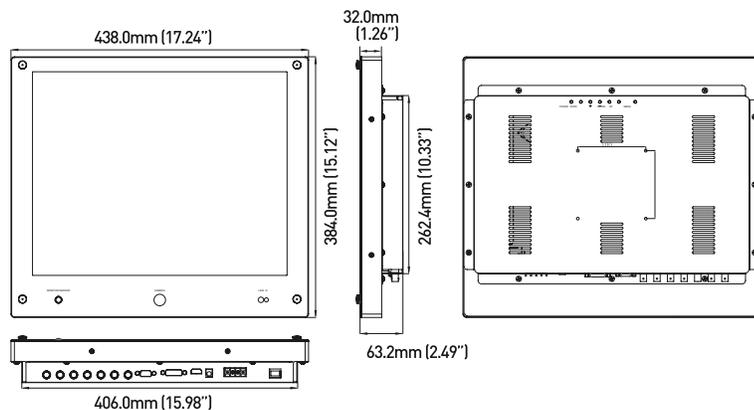

STANDARD LCD MONITORS

ANALOG PUBLIC VIEW MONITORS with BUILT-IN DVR

ANALOG PUBLIC VIEW MONITORS

IP PUBLIC VIEW MONITORS

SUNLIGHT VIEWABLE LCD MONITORS

TOUCH SCREEN LCD MONITORS

FLUSH MOUNT LCD MONITORS

RACK MOUNTABLE LCD MONITORS

# WDL-1900PVM-IP

19" IP Public View Monitor



Networking	
Interface	10/100 Mbps Ethernet, RJ-45
ONVIF	PROFILE S / version 2.2 support
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, BONJOUR RTP/RTSP, SMTP, FTP, DHCP, NTP, DNS, DDNS, SNMP
Users	8 clients monitoring at the same time
Connectors	
Video input	NTSC/PAL multi(BNC 75Ω) / D-SUB15P / DVI-D / HDMI connector
Video output	CVBS (BNC)
Power	
Power input	DC 12V / 5A
Power consumption	T.B.D
Power (camera)	12V / 5A (for external camera)
Environmental	
Operating temperature	0°C ~ +50°C (+32°F ~ +122°F)
Humidity	10~90% RH, non condensing
Dimensions	
Dimensions	438.0(W) × 384.0(H) × 63.2(D)(mm)
Weight	T.B.D

## FEATURES

- High quality and cost-effective
- LED backlight
- Built-in WDR full HD camera (1920 × 1080 FHD)
- Supported OSD (On screen display) and control button
- OSD lockout
- IR remote control
- Indication LED - recording state
- 3D comb. filter
- 3D video noise reduction
- 3D motion adaptive deinterlacer
- 10/100 Mbps Ethernet, RJ-45
- Supported ONVIF profile S/version 2.2
- 8 clients monitoring at the same time
- Auto power ON and source recovery
- In/out connector location - top side
- VESA wall mount - 100 × 100
- 4 cameras (1 × IP camera, 3 × analog cameras) switchable on screen by defined a dwell time
- Logo or video clip switchable on screen by defined a dwell time
- Mask off unused channels
- Changeable logo clip / video clip (SD memory)
- 'Recording in progress' message display at the bottom of screen
- Changeable message (size and color) by OSD menu
- Update IP module firmware over network
- Media player function