



Product at a Glance

- ▶ 2 MP and 5 MP models
- ▶ True WDR (120 dB)
- ▶ H.265/H.264 compression; M-JPEG compression
- ▶ 98 ft/30 m IR range; Smart IR
- ▶ Fixed lens
- ▶ Triple streaming
- ▶ Smart Encoding
- ▶ Power-over-Ethernet (PoE); 12 VDC
- ▶ SD card slot for on-camera storage
- ▶ IP67 rated for outdoor environments
- ▶ IK08 rated for impact protection
- ▶ NDAA/GSA/TAA compliant
- ▶ Surface mounting on wall or ceiling

Overview

Vicon's V2100B Series of HD IP Mini Bullet Cameras is designed for performance in the most demanding security installations. There are 2 MP and 5 MP models with a 2.8 mm fixed lens.

The V2100B Series provides triple streaming video and supports H.264/H.265 compression technology, significantly reducing file sizes and conserving valuable network bandwidth. Smart encoding effectively enhances video encoding efficiency and further reduces transmission rate and improves storage capacity.

The bullet camera is designed for easy installation. Power over Ethernet (IEEE 802.3af) eliminates the need for power cables, providing a cost-effective method of installation. The camera also accepts 12 VDC. The bullet camera can be mounted on a wall or ceiling using the integral wall mount that allows adjustment for the angle of view. Refer to Ordering Information for details on accessories and other mounting options.

In order to adapt to constantly changing outdoor lighting conditions, the V2100B Mini Bullet Series features an autoiris lens that maintains picture quality under changing lighting conditions. The true day/night progressive scan camera also includes a removable IR cut filter for superior image quality in all lighting conditions. True Wide Dynamic Range (120 dB) further improves video exposure quality in scenes with high contrast between bright and dark areas. Smart IR adjusts the intensity of the camera's infrared LEDs to compensate for the distance of an object.

For protection against the elements, the bullet camera is IP67 rated with a IK08 vandal-proof casing to withstand rain, dust, and vandalism. The camera meets the latest regulations required to be NDAA, GSA schedule and TAA approved.

The camera can be used with Vicon Valerus™ as well as many other popular VMS systems; each VMS may support different camera functions.

Specifications

Model	V2102B-W28IR	V2105B-W28IR
Image Sensor:	1/2.8-in.	
Max Resolution:	1920 x 1080 (1080p)	2592×1944 (5 MP)
Image Settings:	Digital image effects: defog, flip, and mirror and corridor. Configurable brightness, contrast, saturation, hue, sharpness. White balance. Backlight Compensation (BLC). Gain control. Gamma correction. Electronic shutter speed. Day/night mode. Dynamic Noise Reduction. Motion detection (4 programmable zones). Privacy masking (8 masks). Dynamic ROI. Digital zoom. Event notification.	
Video Content Analysis (VCA):	Motion, Tampering	
Electronic Shutter Speed:	Auto (1/2 ~ 1/10,000 sec), manual	
Day/Night Performance:	True day/night (IR cut filter)	
Wide Dynamic Range	True WDR; 120 dB	
Minimum Illumination:	Color: 0.07 lux @f/1.8; BW: 0 lux, IR On	Color: 0.08 lux @f/1.6; BW: 0 lux, IR On
IR Distance:	Smart IR. 98 ft (30 m) (850 nm); 16 IR LEDs	
Lenses		
Focal Length:	2.8 mm	2.8 mm
Max. Aperture:	f/1.8	f/1.6
Iris:	Fixed	
Zoom/Focus Adjust:	Fixed	
Field of View: Horizontal/Vertical	110°/60°	92°/70°
Network Video Transmission		
Network:	10/100Base-T/TX: RJ-45	
Image Compression:	H.264; H.265; M-JPEG	
Resolution:	2 MP: 1920×1080 (1080P), 1280×960/720, 800×600, 640×480 5 MP: 2592×1944/1520, 2048×1536, 1920×1080 (1080P), 1280×960/720, 800×600, 640×480	
Protocol:	ARP, DHCP, DNS, FTP, HTTP, HTTPS, HLS, ICMP, IGMP, IPv4/6, LDAP, NTP, RTSP/RTCP/RTP, RTMP, QoS, SMTP, SNMP v1/2c/3, TCP, TLS/TTLS, UDP, UPnP, 802.1X, UPnP, Bonjour, DDNS, PPPoE; ONVIF Profile S/T/G/Q	
Frame Rate:	30/25 fps max	
Streams:	Triple streaming. 2 MP: Single: 2 MP@30fps; Dual: 2 MP@30fps + 2 MP@30fps; Triple: 2 MP@30fps + 2 MP@30fps + 1280 x 720@30 fps 5 MP: Single: 5 MP@30fps; Dual: 5 MP@30fps + 640×480@30fps; Triple: 5 MP@30fps+ 640×480@30fps + 640 x 480@30 fps	
Users:	Live: 10 users	
Web Browser:	Internet Explorer 11®; Chrome®, Safari®, Firefox®, Microsoft® Edge	
Security:	IP address filtering, HTTPS encrypted data transmission, SSL, IEEE 802.1X, Digest Authentication, Advanced Security	

Specifications

Mechanical	
Construction:	Camera case: aluminum alloy. Window: double glass/polycarbonate. Bracket: PC + ABS.
Camera Angle of Adjustment:	Adjusted using integral wall mount. Mechanical camera adjustment pan/tilt.
Mounting:	Surface mount, wall or ceiling
Dimensions:	3.3 in. (84 mm) (W) x 3.1 in. (79 mm) (H) x 5.8 in. (147 mm) (L)
Weight:	1.8 lb (0.8 kg)


Electrical	
Input Power:	PoE IEEE 802.3af class 3; 12 VDC
Current:	12 VDC: 0.56 A; PoE: 0.14 A
Power Consumption:	12 VDC: 6.7 W; PoE: 6.7 W

Controls and Connectors	
Connectors:	Power: 12 VDC: terminal block; PoE/Network: RJ-45 CAT 5; Reset button; Default button; Micro SD card slot for SDHC/SDXC card (128 G max; customer-supplied)

Environmental	
Operating Conditions:	Outdoor rated Temp: -22° to 140° F (-30° to 60° C) Humidity: up to 90%, non-condensing
Approvals:	FCC Class A, CE, IP67, IK08; ONVIF Profile S/T/G/Q, RoHS
Country of Origin:	Taiwan
Warranty:	3 years

Ordering Information		
Resolution	Lens	Model Number
2 MP	2.8 mm fixed	V2102B-W28IR
5 MP	2.8 mm fixed	V2105B-W28IR
Accessories		
Adapter Plate	Allows the V2100B to be mounted on a 4x4 electrical box	V2100B-PLATE
Backbox	For ease of cabling	V2100B-BOX

Dimension Drawing [in. (mm)]

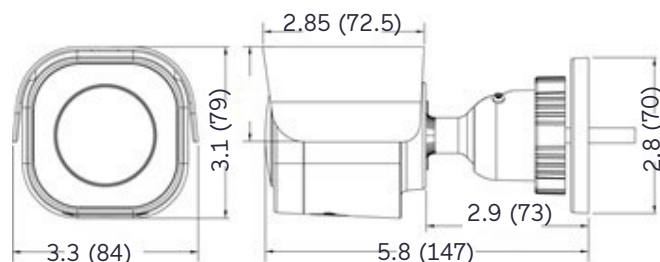

Data Sheet Number: V318-10-01
Vicon Data Sheet Number: 8009-7318-10-00

Specifications subject to change without notice.
Vicon and their logos are registered trademarks of Vicon Industries Inc.
Copyright © 2020 Vicon Industries Inc. All rights reserved.

Explorer is a registered trademark of Microsoft Corporation.
Chrome is a registered trademark of Google LLC.
Firefox is a registered trademark of Mozilla Corp.
Safari is a registered trademark of Apple Inc.