

### REDBACK Deluxe Kit



#### YOU GET


- 1 x REDBACK Head. Deployable Aluminum Fixture with 3456 LED's.
- 1 x Parabolic Backing. 36" Octagon.
- 2 x Diffusions for Parabolic mode. Magic and 1/2 Grid. 36" Octagon..
- 1 x Diffusion storage bag.
- 1 x Ballast. LiteDimmer DU0 400 Hybrid 2600-6000k, 400w, 24v, LumenRadio, 4ch.
- 1 x Neutrik PowerCon cable.
- 1 x Head feeder. 23'
- 1 x Baby pin for mounting fixture to any grip head. Length 5" Diameter.5/8".
- 1 x Lightweight Umbrella. 72" diameter by Westcott. White bounce, Silver bounce or Diffusion.
- 1 x Umbrella mount.
- 1 x Case with custom foam insert by SKB.

#### Accessories included:

- 1 x TEASER for Parabolic Mode. 180 Degree rigid fabric teaser.
- 1 x LCD for Parabolic Mode. 50 degree. Fabric Honeycomb. 36" Octagon.

To rig you will require a 5/8 receiver, usually the grip head of a C-Stand.

### REDBACK output

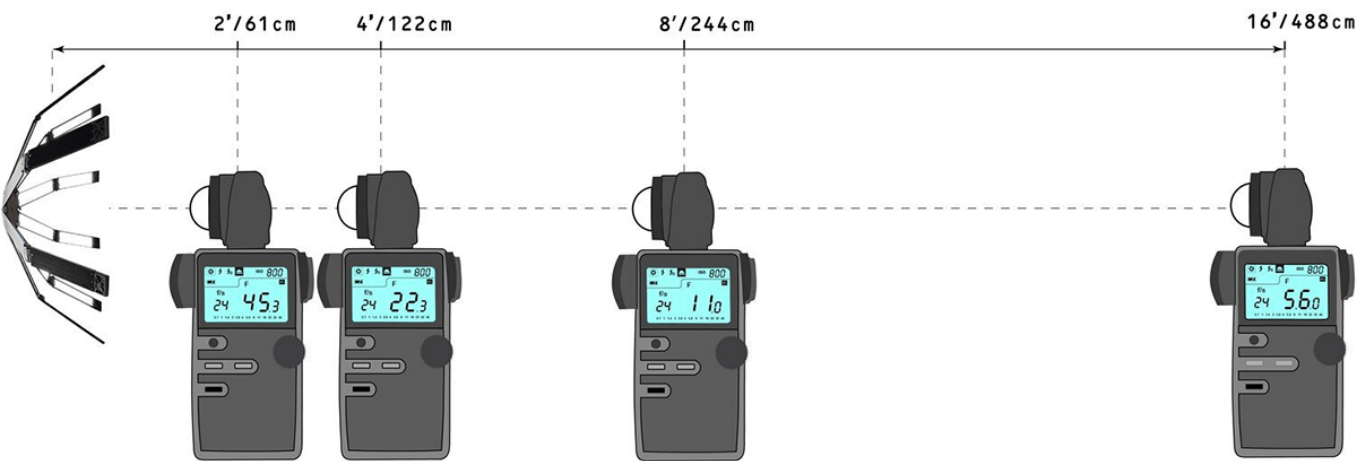

#### REDBACK SPEC SHEET

##### LED

- Total LEDs **3,456.**
- Color range **2600K to 6500K.**
- Dimming range **0 - 100%.**

##### HEAD

- Head size open - parabolic **37"/95.2cm ø Octagon x 15.5" /39.4cm Parabola.**
- Head size open - flat **50"/127cm ø octa x 1"/2.5cm.**
- Configurations **e.g. Parabolic, flat, folded. etc.**
- Head size closed **12"/30.5cm x 8" /20.3 CM ø octa.**
- Head weight **7lbs 4oz / 3.3kgs.**
- Materials **7071+6065 Aluminum, steel, copper and silicone plastics.**

##### ELECTRONICS

- Output voltage **24 VDC constant voltage.**
- Input voltage **90 - 305V AC, 50/60hz (C14 connector) Universal.**
- Power **400W.**
- Power connectors **7 PIN Bayonet locking system. IP 68.**
- Ballast Protection **Over current/voltage/temperature or short circuit.**
- Ballast IP rating **IP20.**
- Ballast size **14"/35cm L x 5"/12.7cm H x 7"/17.8cm W.**
- Ballast weight **11lbs 11oz / 5.3kg.**
- Head feeder length **24' / 7.3m.**
- IEC cord set **US.**

##### DATA

- DMX connector **Input/output 5 pin XLR connector.**
- Service port **USB Type A.**
- Data protocol **DMX 512.**