

PRO SERIES WINCH 9500-12500lbs


Want to go wild in you off road journey! But you have concerns if the going gets tough your winch will not perform and get you get you back on the road? Equip your vehicle with the NOVAWINCH PRO SERIES, the world's safest winch, built with the double lock brake system, lowest current amp draw, and fastest line speed to get you moving when the going gets tough!




Features

1. Sealed 6.0 HP motors deliver a quick but safe 52 FPM line speed at a low 50 Amp draw.
2. Anti-high temperature silver pad, 500A Sealed contactor, Only 360A full load current which is the lowest in the industry field. Contactor will never get stuck.
3. Extremely IP67 sealed provided in gearbox and both drum sides, isolate element out.
4. Innovative "Double-lock" 100% load-holding brake design provides zero drag on cable in. Located inside the gearbox away from the drum to eliminate heat transfer to the synthetic rope.
5. Convertible control box, meets diverse mounting demands.
6. Laser engraved aluminum tie bars, total three (3) tie bar

- construction adds strength between drum supports.
7. Chrome plated aluminum ergonomic free spool knob lifts and turns effortlessly. Easily rotates in 45° gearbox design allows winch can be mounted into vehicle bumper.
8. Winch body hardware and roller fairlead upgrade to stainless steel, avoid rusting and look great at long serve.
9. Professional outdoor satin-black powder coat, never peeling off.
10. Weather resistant, industrial grade rubber toggle hand-held switch with 12.8ft (3.9m) lead. Excellent anti-corrosion and unbreakable.
11. Optional wireless remote, control your winch from up to 60'(20m) away.

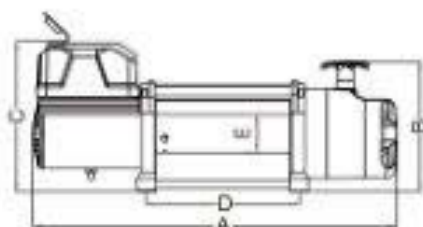

A=23.86"(606mm) B=8.54"(217mm)
 C=9.84"(250mm) D=10"(254mm)
 E=Φ2.48"(63mm)

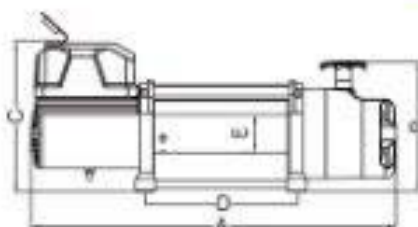

A=23.86"(606mm) B=8.54"(217mm)
 C=9.84"(250mm) D=10"(254mm)
 E=Φ2.48"(63mm)

PRO9500

SPECIFICATIONS:

Rated line pull:

9500lbs(4309kgs)single line

Motor(Series wound):

DC 12V, 6.0hp/4.4kW

Gear train:

4 stage planetary

Gear ratio:

171:1

Clutch:

Pull and turn

Braking action:

Automatic in the ratchet wheel

Fairlead:

4-way roller fairlead (Aluminum housing)

Wire rope:

3/8"×85.3'(9.2mm×26m)

Drum size:

2.48"×8.74"(63mm×222mm)

Dimensions:

23.86"×6.77"×9.84"(606mm×172mm×250mm)

Bolt pattern:

10"×4.5"(254mm×114.3mm)

Net Weight:

93.8lbs(42.5kgs)

12V DC Line speed and motor current (first layer)

Line pull		Line speed		Motor current
lbs	kgs	PPM	MPM	Amps
0	0	52.5	16	50
9500	4309	4.3	1.3	360

PRO12500

SPECIFICATIONS:

Rated line pull:

12500lbs(5670kgs)single line

Motor(Series wound):

DC 12V, 6.4hp/4.7kW

Gear train:

4 stage planetary

Gear ratio:

171:1

Clutch:

Pull and turn

Braking action:

Automatic in the ratchet wheel

Fairlead:

4-way roller fairlead (Aluminum housing)

Wire rope:

3/8"×85.3'(9.2mm×26m)

Drum size:

2.48"×8.74"(63mm×222mm)

Dimensions:

23.86"×6.77"×9.84"(606mm×172mm×250mm)

Bolt pattern:

10"×4.5"(254mm×114.3mm)

Net Weight:

95.8lbs(43.5kgs)

12V DC Line speed and motor current (first layer)

Line pull		Line speed		Motor current
lbs	kgs	PPM	MPM	Amps
0	0	49.2	15	50
12500	5670	3.3	1	390