

# ario

rectified thru color porcelain tile, made in usa



trinity tile  
*Inspiring Surface Design*

# ario

rectified thru color porcelain tile, made in usa



chalk



greige



mud



ash



plumb



coal








canvas white



canvas moka

## AVAILABLE SIZES

	 24"x48"	 24"x24"	 12"x24"	 12"x12" mosaic	 3"x24" bullnose
chalk	●▲	●▲	●▲	●▲	●▲
greige	●▲	●▲	●▲	●▲	●▲
mud	●▲	●▲	●▲	●▲	●▲
ash	●▲	●▲	●▲	●▲	●▲
plumb	●▲	●▲	●▲	●▲	●▲
coal	●▲	●▲	●▲	●▲	●▲
canvas white			●▲		
canvas moka			●▲		

● MATTE ▲ POLISHED

## TECHNICAL SPECIFICATIONS

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	freeze resistance	dcof
test results	N/A 10mm	ASTM C648 ≥400	ASTM C650 not affected	ASTM C373 ≤ 0.5%	N/A v2   canvas v5	ASTM C1026 resistant	A137.1 ≥ 0.66

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.



# city stone

thru color porcelain tile, made in the usa




trinity tile  
*Inspiring Surface Design*



# city stone

thru color porcelain tile, made in the usa

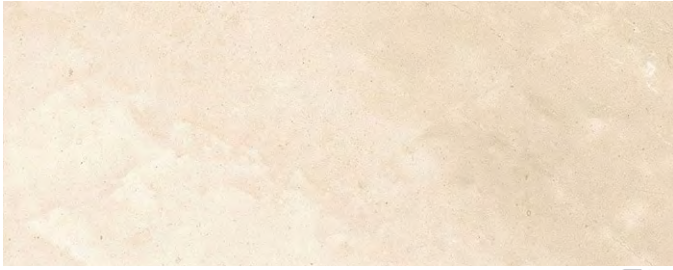


bone




grey




amber

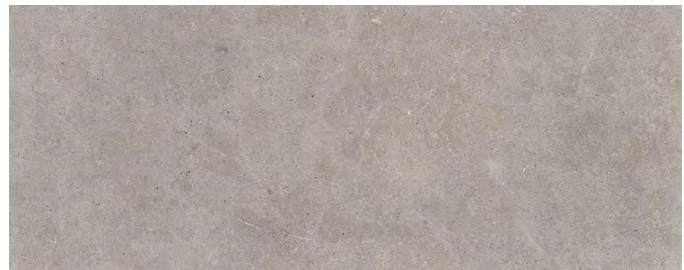

blue

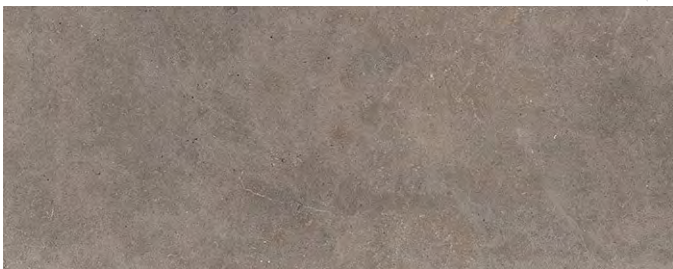





earth

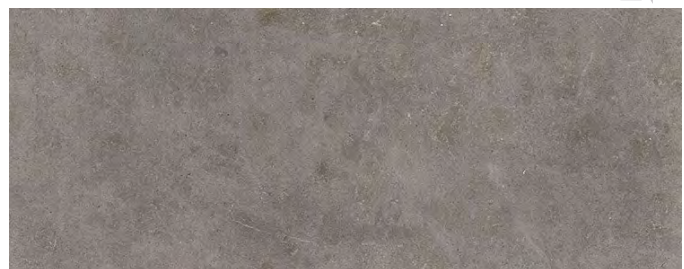

green



## AVAILABLE SIZES

	 12"x24"	 Mosaic 12"x12"	 Bullnose 3"x12"	 Cove Base 6"x12"	
bone	●	●	●	●	
grey	●	●	●	●	
amber	●	●	●	●	
blue	●	●	●	●	
earth	●	●	●	●	
green	●	●	●	●	● MATTE

## TECHNICAL SPECIFICATIONS

	water absorption	breaking strength	deep abrasion resistance	frost resistance	chemical resistance	hardness	coefficient of friction	dynamic coefficient of friction
Test	ASTM C-373	ASTM C-648	ASTM C-1243	ASTM C-1026	ASTM C-650	Mohs	ASTM C-1028	Acu/Test
Results	≤ 0.1%	≥ 350	< 150mm <sup>3</sup>	No cracking occurred	Class A	≥ 7	matte dry ≥ 0.75 wet ≥ 0.6	matte wet ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • [www.trinitytile.com](http://www.trinitytile.com) • 866-774-3390



# constantine


rectified porcelain tile, made in italy



trinity tile  
*Inspiring Surface Design*

# constantine

rectified porcelain tile, made in italy

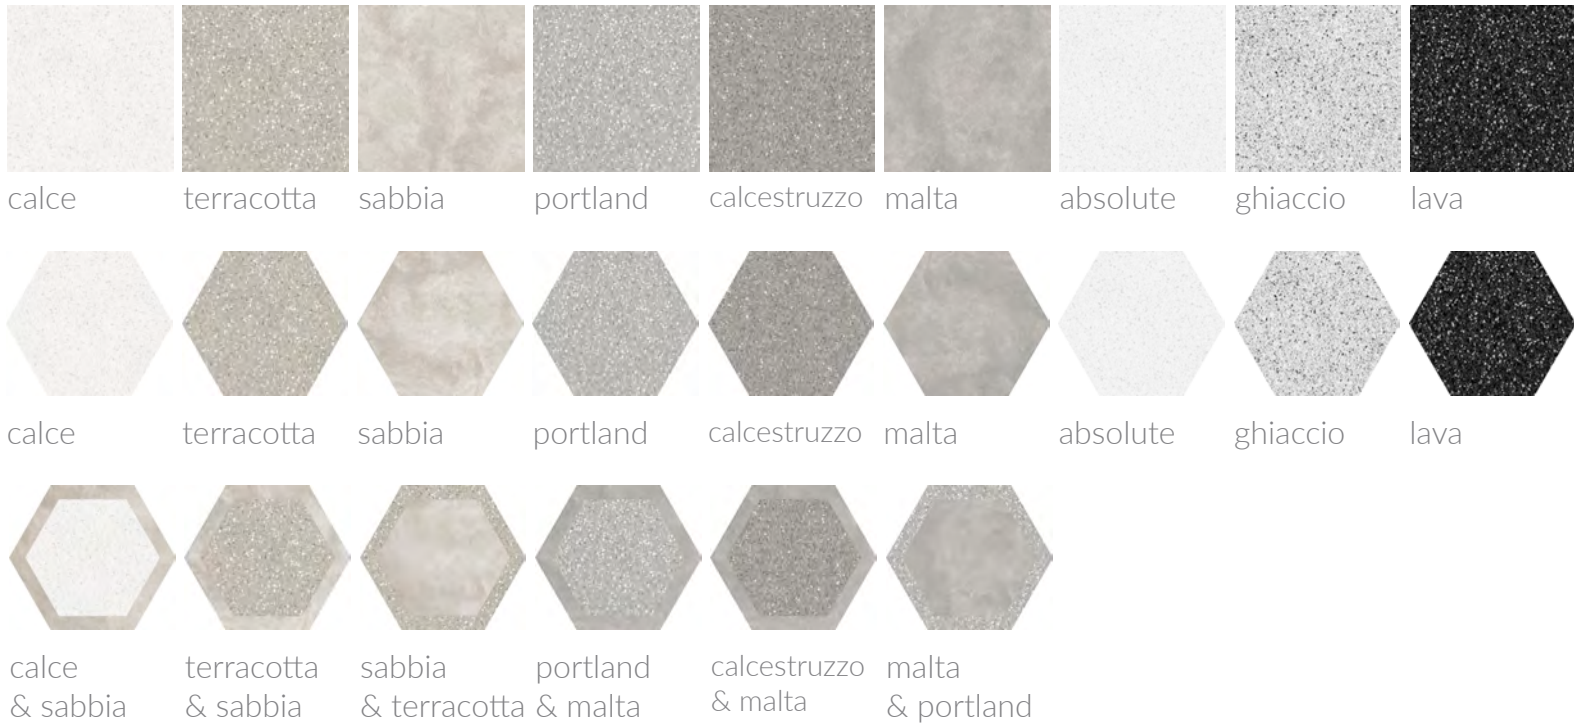

## AVAILABLE SIZES

	24"x24"	4"x24"	4"x4"	diameter 24"
calce	●	●	●	●
terracotta	●	●	●	●
sabbia	●	●	●	●
portland	●	●	●	●
calcestruzzo	●	●	●	●
malta	●	●	●	●
absolute	●	●	●	●
ghiaccio	●	●	●	●
lava	●	●	●	●

● MATTE

## TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	chemical resistance	dynamic coefficient of friction	breaking strength
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-13	ANSI 137.1	ISO 10545-4
Results	9mm	Resistant	≤ 0.5%	Resistant	≥ 0.42	≥ 35 N/mm <sup>2</sup>

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.



# davlin


porcelain tile, made in usa




trinity tile  
*Inspiring Surface Design*

# davlin

porcelain tile, made in usa

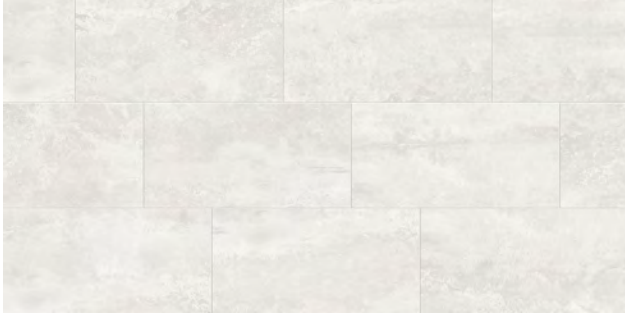

white

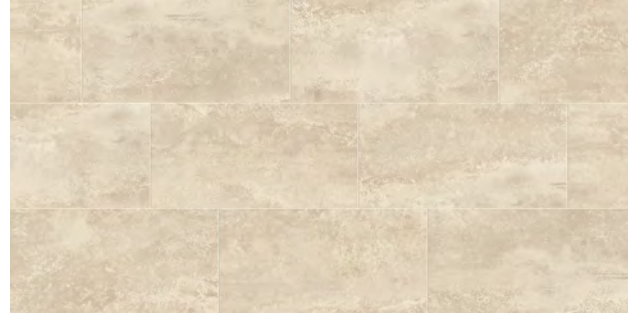

beige






light grey



dark grey



## AVAILABLE SIZES

	 12" x 24"	 mosaic 12" x 12"	 bullnose 3" x 24"	
white	●	●	●	● MATTE
beige	●	●	●	
light grey	●	●	●	
dark grey	●	●	●	

## TECHNICAL SPECIFICATIONS

	shade variation	surface abrasion	water absorption	chemical resistance	stain resistance	breaking strength	frost resistance	dynamic coefficient of friction
Test	N/A	ASTM C1027	ASTM C373	ASTM 650	ASTM C1378	ASTM C648	ASTM C1026	ANSI A 137.1
Results	V3	IV	≤0.5%	Not Affected	Not Affected	≥400	Resistant	≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • [www.trinitytile.com](http://www.trinitytile.com) • 866-774-3390



# karma

thru color rectified porcelain tile, made in italy




trinity tile  
*Inspiring Surface Design*



# karma

thru color rectified porcelain tile, made in italy

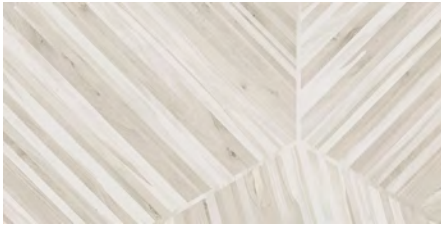

awanui decor



catlins decor



flordland decor




awanui



catlins




flordland

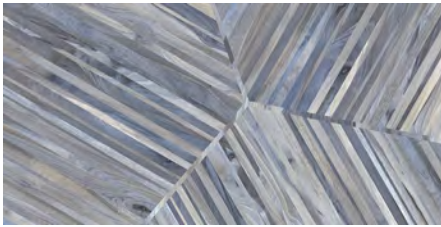

tasman decor



victoria decor




tasman



victoria

## AVAILABLE SIZES




24"x48"  
decor




8"x48"




2 1/2"x48" bullnose



13"x48" step tread



13"x48" step tread anglo sx



13"x48" step tread anglo dx

	24"x48" decor	8"x48"	2 1/2"x48" bullnose	13"x48" step tread	13"x48" step tread anglo sx	13"x48" step tread anglo dx
awanui	▲	● ▲	● ▲	●	●	●
catlins	▲	● ▲	● ▲	●	●	●
flordland	▲	● ▲	● ▲	●	●	●
tasman	▲	● ▲	● ▲	●	●	●
victoria	▲	● ▲	● ▲	●	●	●

● MATTE ▲ POLISHED

## TECHNICAL SPECIFICATIONS

	nominal thickness	frost resistance	water absorption	breaking strength	chemical resistance	shade variation	deep scratch resistance	dynamic coefficient of friction
Test	N/A	ISO 10545-12	ISO 10545-3	ISO 10545-4	ISO 10545-13	N/A	ISO 10545-6	ANSI A 137.1
Results	3/8"	Resistant	≤ 0.02%	S ≥ 1300 N	Resistant	V3 - High	≤ 175 mm <sup>3</sup>	matte ≥ 0.42

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.

115 S.W. 49th Avenue, Ocala, Florida 34474 • www.trinitytile.com • 866-774-3390



# zest

thru olor rectified porcelain tile, made in italy



trinity tile  
*Inspiring Surface Design*

# zest

thru color rectified porcelain tile, made in italy



ivory



silver



sand




grey



black




ivory  
bookmatch  
4piece set




silver  
bookmatch  
4 piece set



sand  
bookmatch  
4 piece set



grey  
bookmatch  
4 piece set



black  
bookmatch  
4 piece set

## AVAILABLE SIZES

	24"x48"	24"x48" bookmatch	24"x24"	12"x24"	8"x24" fascia mosaic	12"x12" inverso mosaic	12"x12" mosaic	12"x48" step tread	3"x24" bullnose
white	●▲■	▲	●▲■	●▲	●	●	●▲	●▲	●▲
ivory	●▲■	▲	●▲■	●▲	●	●	●▲	●▲	●▲
beige	●▲■	▲	●▲■	●▲	●	●	●▲	●▲	●▲
light grey	●▲■	▲	●▲■	●▲	●	●	●▲	●▲	●▲
dark grey	●▲■	▲	●▲■	●▲	●	●	●▲	●▲	●▲

## TECHNICAL SPECIFICATIONS

● MATTE & POLISHED MIX ■ GRIP ● MATTE ▲ POLISHED

	nominal thickness	breaking strength	chemical resistance	water absorption	shade variation	frost resistance	dcof
test	-	ISO 10545-04	ISO 10545-13	ISO 10545-03	N/A	ISO 10545-12	A137.1
results	10mm	>1300	not affected	≤ .5%	v4	resistant	matte .69   grip .85

ANSI A108.02 Section 4.3.8 Grout joint minimum is 1/8". When installing in running bond/brick joint pattern, a maximum 30% offset is recommended along with 3/16" grout joint.



# rims edge

decorative glass & metal mosaic



trinity tile  
*Inspiring Surface Design*



# rims edge

decorative glass & metal mosaic



white/metal j-57  
11.8"x11.8"



gray/metal j-58  
11.8"x11.8"



gray/brown/metal j-59  
11.8"x11.8"




white/gray j-60  
11.8"x11.8"




gray j-61  
11.8"x11.8"



white/gray/beige j-62  
11.8"x11.8"

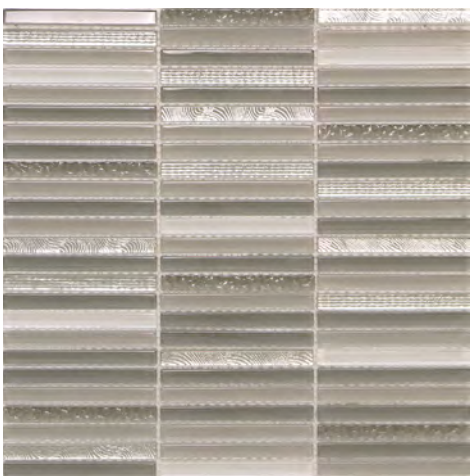

gray/silver j-63  
11.8"x11.8"

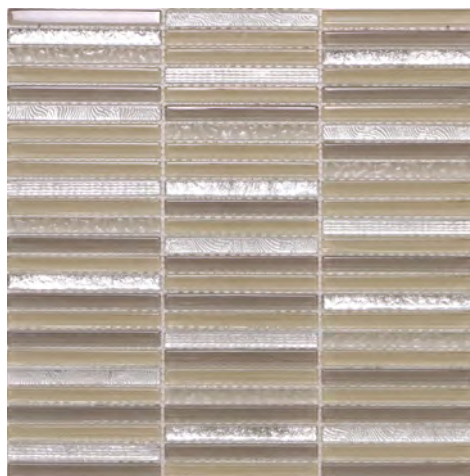

silver/beige j-64  
11.8"x11.8"



white/silver j-65  
11.8"x11.8"