

July 1, 2020

pattern of traffic movements. Unusual turning movement patterns may possibly call for a different shape of widening.

The impact on pedestrian and bicycle traffic mobility of larger intersections should be assessed before a decision is made to widen an intersection.

405.10 Roundabouts

Roundabout intersections on the State highway system must be developed and evaluated in accordance with National Cooperative Highway Research Program (NCHRP) Report 672 entitled "Roundabouts: An Informational Guide, 2nd ed." (NCHRP Guide 2) dated October 2010 and Traffic Operations Policy Directive (TOPD) Number 13-02. Also see Index 401.5 for general information and guidance. See Figure 405.10 Roundabout Geometric Elements for nomenclature associated with roundabouts. Signs, striping and markings at roundabouts are to comply with the California MUTCD.

A roundabout is a form of circular intersection in which traffic travels counterclockwise around a central island and entering traffic must yield to the circulating traffic. Roundabouts feature, among other things, a central island, a circulatory roadway, and splitter islands on each approach. Roundabouts rely upon two basic and important operating principles:

- (a) Speed reduction at the entry and through the intersection will be achieved through geometric design and,
- (b) The yield-at-entry rule, which requires traffic entering the intersection to yield to traffic that is traveling in the circulatory roadway.


Benefits of roundabouts are:

- Fewer conflict points typically result in fewer collisions with less severity. Over half of vehicle to vehicle points of conflict associated with intersections are eliminated with the use of a roundabout. Additionally, a roundabout separates the points of conflict which eases the ability of the users to identify a conflict and helps prevent conflicts from becoming collisions.
- Roundabouts are designed to reduce the vehicular speeds at intersections. Lower speeds lessens the vehicular collision severity. Likewise, studies indicate that pedestrian and bicyclist collisions with motorized vehicles at lower speeds significantly reduce their severity.
- Roundabouts allow continuous free flow of vehicles and bicycles when no conflicts exist. This results in less noise and air pollution and reduces overall delays at roundabout intersections.

Except as indicated in this Index, the standards elsewhere in this manual do not apply to roundabouts. For the application of design standards, the approach ends of the splitter islands define the boundary of a roundabout intersection, see Figure 405.10. The design standards elsewhere in this manual apply to the approach legs beyond the approach ends of the splitter islands.

Figure 405.10

Roundabout Geometric Elements

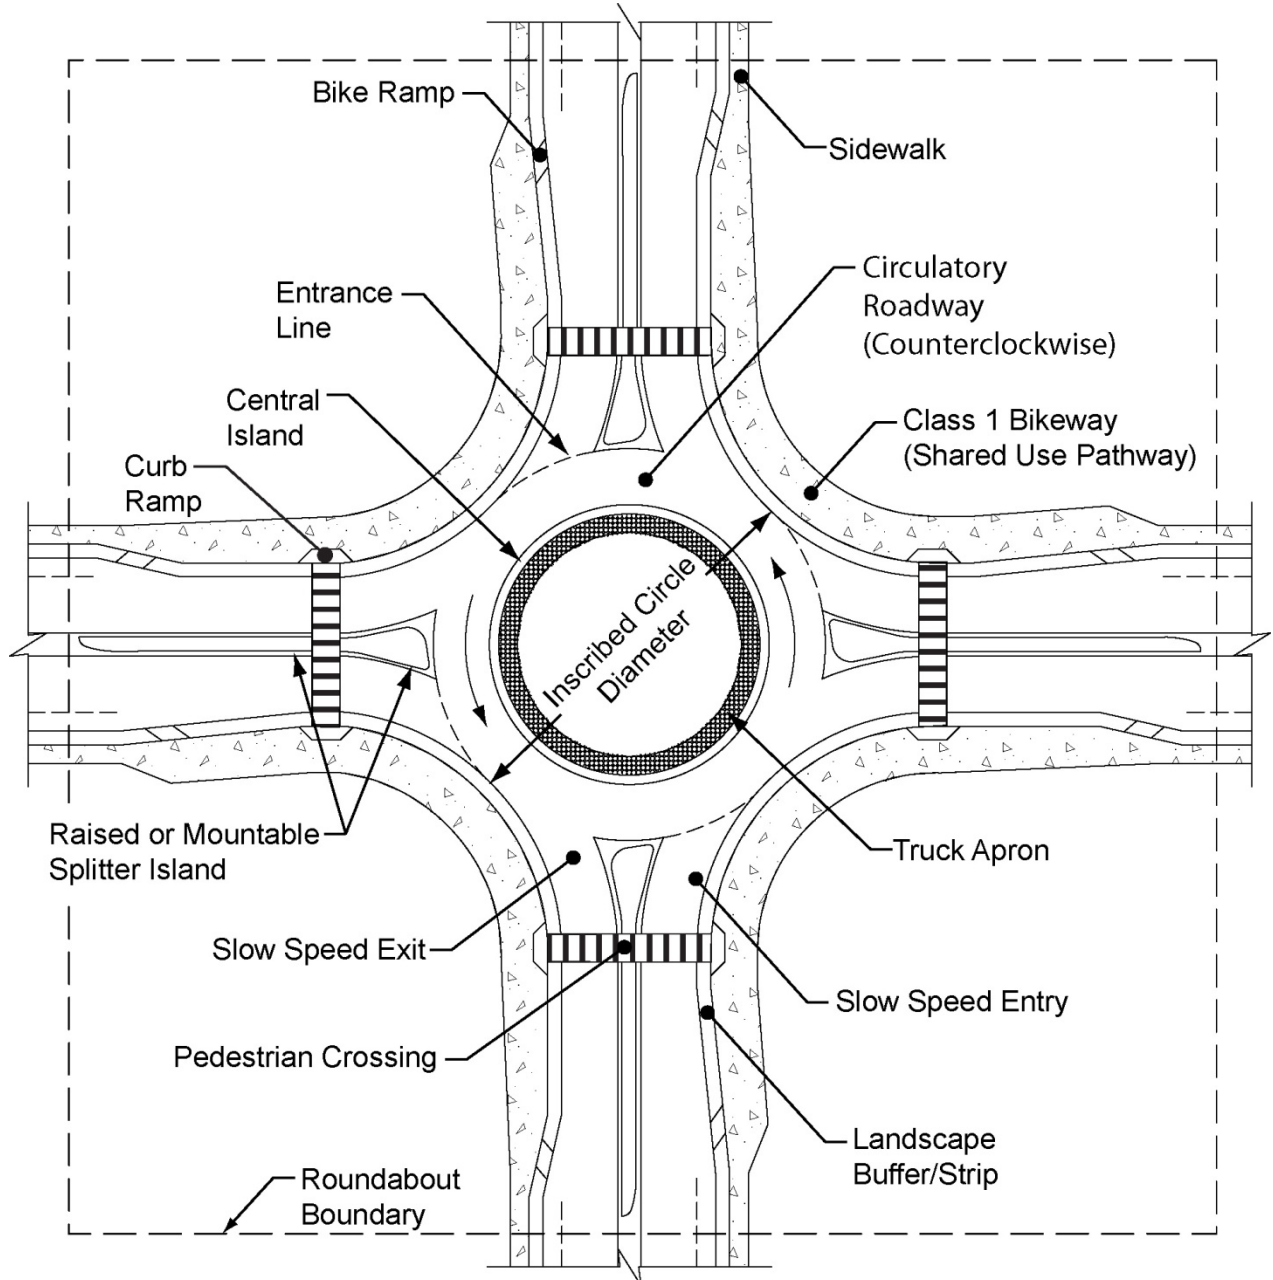

NOTE:

This figure is provided to only show nomenclature and is not to be used for design details.

July 1, 2020

- (1) *Design Period.* First consider the design of a single lane roundabout per the design period guidance in Index 103.2. If a second lane is not needed until 10 or more years, it may be better to phase the improvements. Construct the first phase of the roundabout so at the 20-year design period, an additional lane can be easily added. In order to comply with the 20-year design period, the initial project must provide the right of way needed for utility relocations, a shared-use path designed for a Class I Bikeway, and all other features other than pavement, lighting, and striping in their ultimate locations.

In some locations, it may not be practical to build a single lane roundabout that will operate for 10 years. Geometric constraints and other conflicts may preclude widening to the ultimate configuration. In such cases, other intersection configurations or control strategies addressed in Index 401.5 may need to be considered.

When staging improvements, see NCHRP Guide 2, Section 6.12.

- (2) *Design Vehicles.* See Topic 404. The turning path for the design vehicle, see Index 404.5, dictates many of the roundabout dimensions. The design vehicle tracking and swept width are to be used when designing all the entries and exits, where design vehicles are unrestricted (see Index 404.2), and the circulatory roadway. The percentage of trucks and their lane utilization is an important consideration on multilane roundabouts when determining if the design will allow trucks to stay within their own lane or encroach into the adjacent lane. If permit vehicles larger than the design vehicle occasionally use the proposed roundabout, they can be accommodated by having removable signs or other removable features in the central island or around the circular path to ensure their swept path can negotiate the roundabout. Roundabouts should not be overdesigned for the occasional permit vehicle.

To accurately simulate the design vehicle swept width traveling through a roundabout, the minimum speed of the design vehicle used in computer simulation software (e.g., Auto TURN) should be 10 miles per hour through the roundabout.

- (3) *Inscribed Circle Diameter.* At single lane roundabouts, the size of the inscribed circle is largely dependent upon the turning requirements of the design vehicle. The inscribed circle diameter (ICD) must be large enough to accommodate: (a) the STAA design vehicle for all roundabouts on the National Network and on Terminal Access routes; and, (b) the California Legal design vehicle on all non-STAA route intersections on California Legal routes and California Legal KPRA Advisory routes, while maintaining adequate deflection curvature to ensure appropriate travel speeds for smaller vehicles. The design vehicle is to navigate the roundabout with the front tractor wheels off the truck apron, if one is present. Transit vehicles, fire engines and single-unit delivery vehicles are also to be able to navigate the roundabout without using the truck apron, if one is present. The inscribed circle diameter for a single lane roundabout generally ranges between 105 feet to 150 feet to accommodate the California Legal design vehicle and 130 feet to 180 feet to accommodate the STAA design vehicle.

At multilane roundabouts, the inscribed circle diameter is to achieve adequate alignment of the natural vehicle path while maintaining deflection curvature to ensure appropriate travel speeds. To achieve both of these design objectives requires a slightly larger diameter than used for a single lane roundabout. The inscribed circle diameter for a multilane (2-lane) roundabout generally ranges between 150 feet to 220 feet to accommodate the California Legal design vehicle for non-STAA route intersections on California Legal routes and California Legal KPRA Advisory routes, and 165 feet to 220 feet to accommodate the STAA design vehicle for roundabouts on the National Network and on Terminal Access routes. Similar to a single lane roundabout, the design vehicle is to be able to navigate a multilane roundabout with the front tractor wheels staying off the truck apron, if one is present. Transit

vehicles, fire engines and single-unit delivery vehicles are also to be able to navigate the roundabout without using the truck apron, if one is present.

The inscribed diameter ranges given above are typical values, design may be larger or smaller. Site location constraints and performance checks will determine if the diameter is appropriate for the location.

- (4) *Entry Speeds.* Lowering the speed of vehicles entering and traveling through the roundabout is a primary design objective that is achieved by approach alignment and entry geometry.

The following entry speeds should not be exceeded:

- Single lane entry, 25 miles per hour.
- Multilane entry, 30 miles per hour.

A bypass lane is not included in the number of entry lanes. A bypass prohibits entry into the circulatory roadway.

Entry speeds are to be determined through fastest path analysis. Fastest path is the smoothest, flattest path possible for a single vehicle in the absence of other traffic and ignoring all lane markings. The fastest path analysis should begin at least 165 feet from the inscribed circle diameter and should not bring the path closer than 3 feet from a stripe nor 5 feet from the face of a curb. These distances are minimums and the fastest path may occur further away from the curbs and striping depending on the roundabout configuration. For fastest path evaluation, see NCHRP Guide 2, Section 6.7.1.

- (5) *Exit Design.* Similar to entry design, exit design flexibility is required to achieve the optimal balance between competing design variables and project objectives to provide adequate capacity and, essentially, safety while minimizing excessive property impacts and costs. Thus, the selection of a curved versus tangential design is to be based upon the balance of each of these criteria. Exit design is influenced by the place type, pedestrian demand, bicyclist needs, the design vehicle and physical constraints. The exit curb radii are usually larger than the entry curb radii in order to minimize the likelihood of congestion and crashes at the exits. However, the desire to minimize congestion at the exits needs to be balanced with the need to maintain an appropriate operating speed through the pedestrian crossing. Therefore, the exit path radius should not be significantly greater than the circulating path radius to ensure low speeds are maintained at the pedestrian crossing.
- (6) *Number of Legs Serving the Roundabout.* Intersections with more than four legs are often difficult to manage operationally. Roundabouts are a proven traffic control device in such situations. However, it is necessary to ensure that the design vehicle can maneuver through all unrestricted legs of the roundabout.

July 1, 2020

(7) *Pedestrian Use.* Sidewalks around the circular roadway are to be designed as shared-use paths, see Index 405.10(8)(c). However, the guidance in Design Information Bulletin (DIB) 82 Pedestrian Accessibility Guidelines for Highway Projects must also be followed when designing these shared-use facilities around a roundabout. If there is a difference in the standards, the guidance in DIB 82 is to be followed. In addition,

(a) Pedestrian curb ramps need to be differentiated from bike ramps:

- The detectable warning surface (truncated domes) differentiates a pedestrian curb ramp from a bicycle ramp.
- Detectable warning surface is required on curb ramps. They are not to be used on a bike ramp.

(b) Truck aprons and mountable curbs are not to be placed in the pedestrian crossing areas.

(c) See the California MUTCD for the signs and markings used at roundabouts.

(d) At pedestrian crossing locations the accessibility design will be treated as a midblock pedestrian street crossing. See DIB 82 for more information.

(8) *Bicyclist Use.*

(a) General. Bicyclists may choose to travel in the circular roadway of a roundabout by taking a lane, while others may decide to travel using the shared-use path to bypass the circular roadway. Therefore, the approach and circular roadways, as well as the shared-use path all need to be designed for the mobility needs of bicyclists. See the California MUTCD for the signs and markings used at roundabouts.

(b) Bicyclist Use of the Circular Roadway. Single lane roundabouts do not require bicyclists to change lanes in the circular roadway to select the appropriate lane for their direction of travel, so they tend to be comfortable for bicyclists to use. Even two-lane roundabouts, which may have straighter paths of travel that can lead to faster vehicular traveling speeds, appear to be comfortable for bicyclists that prefer to travel like vehicles. Roundabouts that have more than two circular lanes can create complexities in signing and striping (see the California MUTCD for guidance), and their operating speed may cause some bicyclists to decide to bypass the circular roadway and use the bicycle ramp that provides access to the shared-use path around the roundabout.

(c) Bicyclists Use of the Shared-Use Path. The shared-use path is to be designed using the guidance in Index 1003.1 for Class I Bikeways and in NCHRP Guide 2 Section 6.8.2.2. However, the accessibility guidance in DIB 82 must also be followed when designing these shared-use facilities around a roundabout. If there is a difference in the standards, the accessibility guidance in DIB 82 is to be followed to ensure the facility is accessible to pedestrians with disabilities.

Bicycle ramps are to be located to avoid confusion as curb ramps for pedestrians. Also see Index 405.10(7) for guidance on how to differentiate the two types of ramps. The design details and width of the ramp are also important to the bicyclist. Bicyclists approaching the bicycle ramp need to be provided the choice of merging left into the lane or moving right to use the bicycle ramp. Bicycle ramps should be placed at a 35 to 45 degree angle to the departure roadway and the sidewalk to enable the bicyclists to use the ramp and discourage bicyclists from entering the shared-use path at a speed that is detrimental to the pedestrians. The shared-use path should be designated as Class I Bikeways; however, appropriate regulatory signs may need to be posted if the local jurisdiction has a law(s) that prohibit bicyclists from riding on a sidewalk.

A landscape buffer or strip between the shared-use/Class I Bikeway and the circular roadway of the roundabout is needed and should be a minimum of 2 feet wide.

Pedestrian crossings may also be used by bicyclists; thus, these shared-use crossings need to be designed for both bicyclist and pedestrian needs.

(9) *Transit Use.* Transit vehicles and buses will not have difficulty negotiating a roundabout when it has been designed using the California Legal design vehicle or the STAA design vehicle. However, to minimize passenger discomfort, a roundabout should be designed such that the transit vehicle or bus does not use the truck apron, if one is present.

(10) *Stopping Sight Distance and Visibility.* See Index 201.1 for stopping sight distance guidance at roundabouts.

A domed or mounded central island, between 3.5 to 6 feet high, is needed to focus attention on the approach and through roundabout alignment. A domed central island provides a visual screen from downstream alignment and other distractions and provides a visual cue for vehicles approaching the roundabout.

In high speed environments, additional lighting of, and vertical elements in the central island (i.e., landscaping and esthetic features) may be needed.

(11) *Speed Consistency.* Consistency in operating speeds between the various movements within the roundabout can minimize collisions between traffic streams. The operating speeds between competing traffic streams and between consecutive geometric elements should be minimized such that the maximum speed differential between them is no more than 15 miles per hour; it is preferred that the operating speed differential be less than 10 miles per hour.

(12) *Path Alignment (Natural Path).* As two traffic streams approach the roundabout in adjacent lanes, drivers and bicyclists will be guided by lane markings up to the entrance line. At the yield point, they will continue along their natural trajectory into the circulatory roadway. The speed and orientation of the design vehicle at the entrance line determines what can be described as its natural path. The geometry of the exits also affects the natural path that the design vehicle travels. The natural path of two vehicles are not to overlap, see NCHRP Guide 2, Section 6.7.2.

(13) *Splitter Islands.* Splitter islands (also called separator islands, divisional islands, or median islands) will be provided on all roundabouts. The purpose is to provide refuge for pedestrians, assist in controlling speeds, guide traffic into the roundabout, physically separate entering and exiting traffic streams, and deter wrongway movements.

The total length of the raised island should be at least 50 feet although 100 feet is desirable. On higher speed roadways, splitter island lengths of 150 feet or more is beneficial. Additionally, the splitter island should extend beyond the end of the exit curve to prevent exiting traffic from crossing into the path of approaching traffic. The splitter island width should be a minimum of 6 feet at the pedestrian crossing to adequately provide refuge for pedestrians.

Posted speeds on the approach roadway greater than or equal to 45 miles per hour require the splitter island length, as measured from the inscribed circle diameter, to be 200 feet. In some instances, a longer splitter island may be desirable. Concrete curb is to be provided on the right side of the approach roadway equal to the length of the splitter island from the inscribed circle diameter.

(14) *Access Control.* The access control standards in Index 504.3(3) and 504.8 apply to roundabouts at interchange ramp intersections. The dimensions shown in Index 504.8 are to be measured from the inscribed circle diameter.

Driveways should not be placed within 100 feet from the inscribed circle diameter.

July 1, 2020

- (15)*Lighting*. Lighting is required at all roundabouts. See NCHRP Report 672 Chapter 8, the Traffic Manual Chapter 9 as well as consult with the District Traffic Safety Engineer.
- (16)*Landscaping*. Landscaping should be designed such that drivers and bicyclists can observe the signing and shape of the roundabout as they approach, allowing adequate visibility for making decisions within the roundabout. The landscaping of the central island can enhance the intersection by making it a focal point, by promoting lower speeds and by breaking the headlight glare of oncoming vehicles or bicycles. It is desirable to create a domed or mounded central island, between 3.5 to 6 feet high, to increase the visibility of the intersection on the approach. Contact the District Landscape Architecture Unit to provide technical assistance in designing the roundabout landscaping. See Chapter 900 for additional Landscape Architecture requirements.
- (17)*Vertical Clearance*. The vertical clearance guidance provided in Index 309.2 applies to roundabouts.
- (18)*Drainage Design*. See Chapter 800 to 890 for further guidance.
- (19)*Maintenance*. Contact the District Maintenance Engineer and appropriate Regional Manager for maintenance strategies and practices including seasonal operations, maintenance resources, and specialized equipment. Maintenance responsibilities may also include multiple state, county, and city agencies where coordination of maintenance efforts and funding is needed.
- Consider maintenance of the central island. Provide a maintenance vehicle pullout within the central island beyond the truck apron, so maintenance vehicles will not conflict with circulating trucks.
- (20)*Snow Areas*. In climate regions where snowfall requires the use of snow removal equipment, consider the equipment to be used. Design ICD's as well as entrance and exit geometry to accommodate snow removal equipment and plow limitations. Check with District Maintenance for their requirements and limitations. Geometric elements to consider that facilitate snow removal are; mountable curb, tapering the ends of curbs down to allow plows to ride over curbs, plowing accommodation in both directions, providing snow storage space within the central island, and providing minimum entry/exit widths to accommodate the plow blade. Mountable curb may be used if sidewalk/shared use path is not contiguous to the curb. Provide a planter or textured pavement between the path and the roadway. Snow storage areas must be designed to prevent snow melt from entering the circulating lanes where it can freeze. Snow storage areas must not block pedestrian paths.
- (21)*Utilities*. Utility access openings (manholes) should not be located within the traveled way within the boundary of the roundabout. Roundabouts do not have shoulders to accommodate traffic while manholes are accessed. Manholes should not be allowed within the circulating roadway to avoid closing down the intersection during access. If a manhole is absolutely necessary within the boundary of the inscribed diameter, place it in the central island and off of the truck apron. Provide a maintenance vehicle pullout to allow access to the manhole without blocking truck traffic.

Topic 406 – Ramp Intersection Capacity Analysis

The following procedure for ramp intersection analysis may be used to estimate the capacity of any signalized intersection where the phasing is relatively simple. It is useful in analyzing the need for additional turning and through traffic lanes. For a more complete analysis refer to the Highway Capacity Manual.