



floorazzo[®]

Easy to use tile with the

*natural
beauty*

and durability of genuine terrazzo

quality



About Florazzo, LLC

We are committed to maintaining strict environmental standards across our businesses and offer Green Label Plus and FloorScore® certified products, Green Guard certified adhesives, and environmentally-friendly maintenance and end-of-life recycling programs. We are proud members of the U.S. Green Building Council and many of our products can contribute LEED credits. We work with our suppliers and business partners to ensure the highest environmental standards. Our vendors are ISO certified, and we have partnered with reclamation companies to minimize the environmental impacts of our products at the end of their useful life. We're not paying lip service to the environmental movement. We're living it. We're focused on clean, green and beautiful products because it's the right thing to do.



floorazzo[™]

Floorazzo™

Crafted from a resilient polyester resin and combinations of marble, glass and stone, Floorazzo™ is an easy-to-use tile with the natural beauty and durability of genuine terrazzo.

Floorazzo™ is prefabricated terrazzo that is manufactured in a quality controlled factory for clean, fast and easy installation. Tiles can be installed to produce the appearance of a luxurious monolithic floor.

Choose from the celebrated Floorazzo™ Gem and Marble color suites or select from a wide range of resin background colors and assorted marble, glass and stone to create an exclusive Floorazzo™ design.

A long-lasting and beautiful flooring solution for airport terminals, banks, bus terminals, corporate office buildings, department stores, education facilities, government buildings, healthcare facilities, hospitality environments, municipal buildings, retail stores and more.

Floorazzo™ is available in 2' x 2' tiles and 2' x 4' FUSION System™ panels.

Easy to use tile with the natural beauty and durability of terrazzo

Butt joint installation method

Clean, fast and easy installation

Trouble-free maintenance

No cracking

Rich color assortment

Custom color design expertise

TZT-1 and TZT-2 Size and 2'x4' FUSION System™ panels

No Grout

Faster installation

Easier maintenance

Monolithic appearance

Responsive Material

No cracking

Endures movement at expansion joints

Ability to angle drainage areas

Large Tiles & Panels

Fewer seams

Tight fit

Luxurious look

Floorazzo™ & FUSION System™

The patent pending FUSION System™ molecularly bonds Floorazzo™ tile seams to create a truly monolithic floor. FUSION System™ provides a seamless, bead-and-crevice free installation, unique only to Floorazzo™.

The Floorazzo™ & FUSION System™ is a hygienic flooring solution with long-lasting beauty. Because it is both durable and extremely easy to maintain, it is a practical solution for environments where controlling contamination is a priority or where monolithic flooring is desired.

Commercial Kitchens Electronics Manufacturers
Food Service Providers Healthcare Facilities
Industrial Clean Rooms Laboratories Pharmaceutical Companies



FUSION



Inside Edge



Outside Edge



Sanitary Cove Base

natural beauty



Floorazzo™ for Healthcare

Healthcare facilities demand the most stringent maintenance schedules and require products that are durable, hygienic, and stain resistant. They must also reduce maintenance time and expense.

Tiles are quickly and easily installed using butt joint installation method, ideal for...




Lobbies
Waiting Rooms
Corridors
Stairwells

Patient Rooms
Nurses' Stations
Emergency
Departments

Intensive Care Units
Neonatal & Pediatric
Intensive Care Units
Operating Rooms

Hygienic & durable

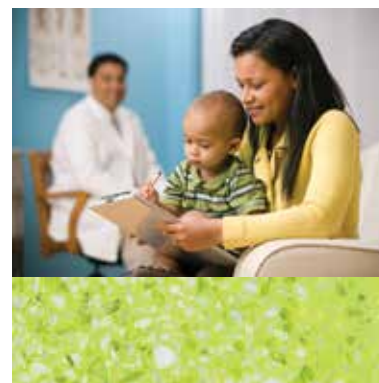

An Unparalleled Operating Room Solution

The Floorazzo™ & FUSION System™ is used to construct a hygienic flooring solution that is long lasting, easy to maintain and beautiful.

An integrated floor, cove and wall system expressly designed to solve common operating room problems with requirements set by Johns Hopkins Facility Engineering.

- Outlasts and outperforms nearly all other types of flooring
- Extremely durable to withstand heavy foot traffic, tables, and carts
- Stain resistant and easy to clean
- Significantly reduces maintenance and repair expense
- Reduces sterilization time in OR units
- Ideal replacement floor; reduces out of service time
- Eliminates wall damage from tables and carts

The best of both worlds... quick and clean installation of tile combined with the durability of poured-in-place terrazzo, the Floorazzo™ & FUSION System™ seamlessly melds these features and turns 2' x 4' pre-cast terrazzo panels into a monolithic floor. The wall system utilizes 2' x 2' tile, which prevents damage, mold and bacterial growth. Finally, an OR flooring solution that is long-lasting, non-staining, water-tight and cost-effective.



color suite


Gem




Lime Rickey




Cotton Candy

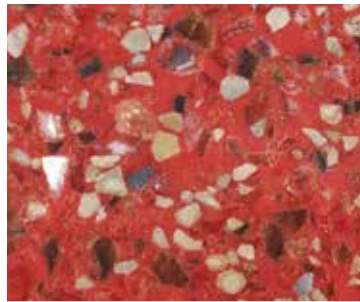


Habanero

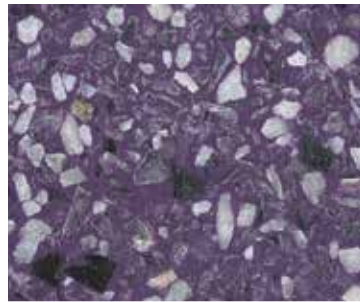


Purple Rain

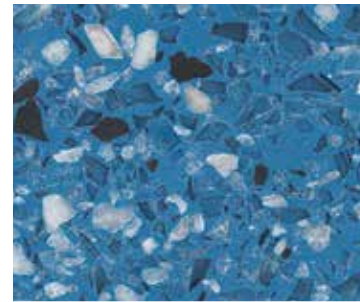


Moonstone

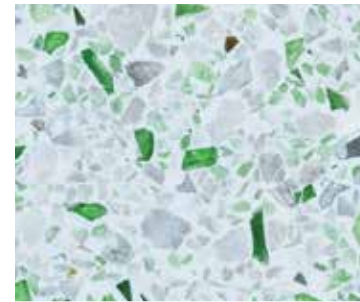


Emerald

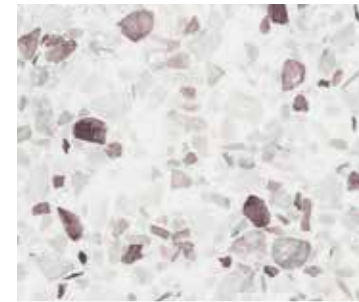

First Snow

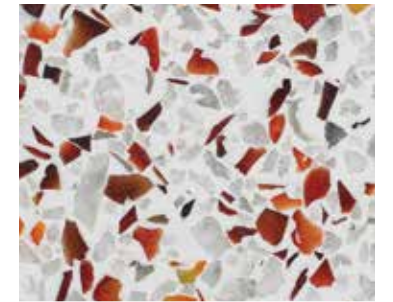


Ruby

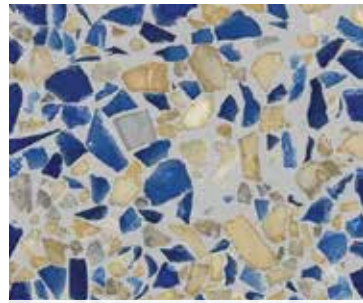


High Tide




Pearl

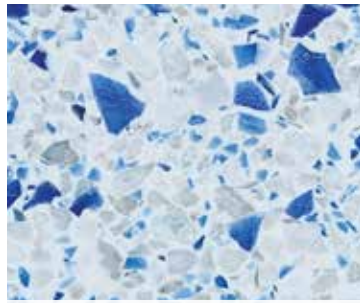


Cape Cod

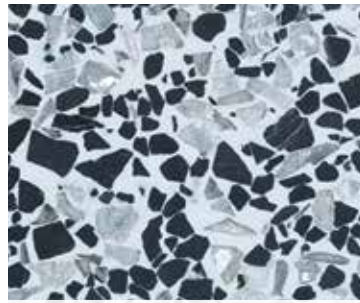


Onyx

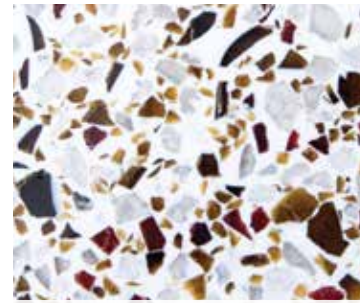


Salsa

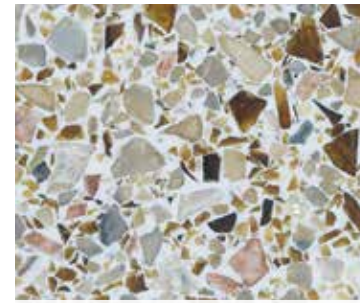


S'mores

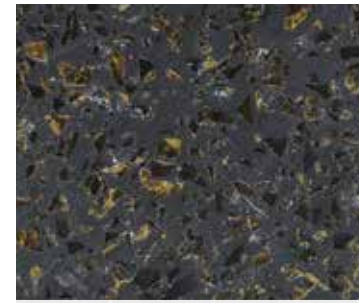


Espresso Macchiato

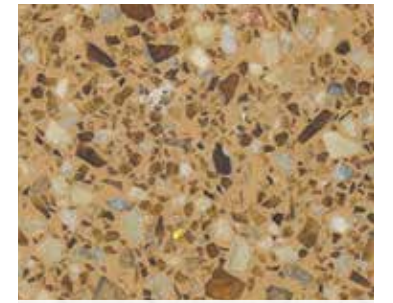


French Toast

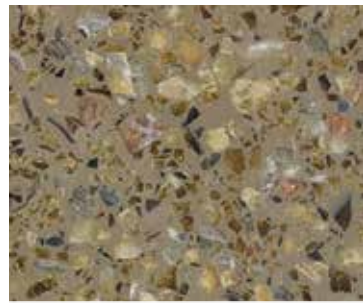


Grand Canyon

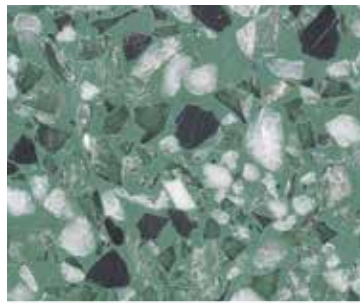

Mint Julep

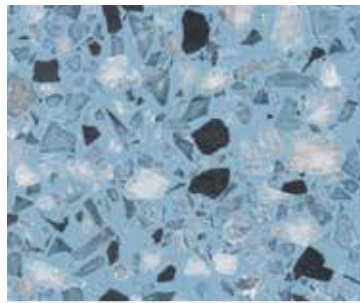

Stonewashed

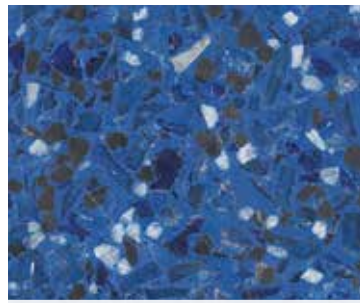

Blue by You

Material
Homogeneous terrazzo floor covering

Weight
2.15 lbs/sq ft

Tile Sizes
2' x 2' and 2' x 4' FUSION System™ Panels

Thickness
3/16", 1/8" on request

Recycled Content
21% pre-consumer
41% post-consumer

Possible LEED v4 Credits
Material Resources (MR), HPD Available Indoor Environmental Quality (IEQ), Low Emitting Materials (adhesives) Mats Inc. Perma-Bond is FloorScore Certified




Made in USA


	(Test) Requirement	Floorazzo™
Safety		
Critical Radiant Flux	(ASTM E648) Class 1: 0.45 w/cm ² or higher	Class 1, 1.09 w/cm ²
Static Coefficient of Friction	(ASTM D2047) Slip coefficient	0.80
Smoke Density	(ASTM E662) Maximum specific optical density: <450	Pass
Performance		
Antistatic Behavior	(EN 1815) Antistatic: less than 2 kilovolts (kV)	< 2 kV
Durability		
Static Load Limit	(ASTM F970)	Exceeds 1000 psi
Durometer Hardness	(ASTM D2240) Shore A: 0 - 100	> 100
Chemical Resistance	(ASTM F925) Best = no change	No change

color suite

Marble

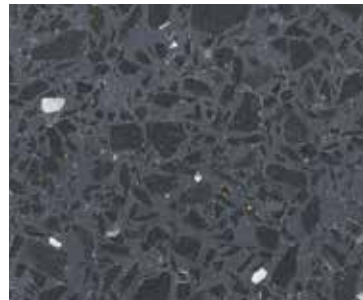


Sea Urchin

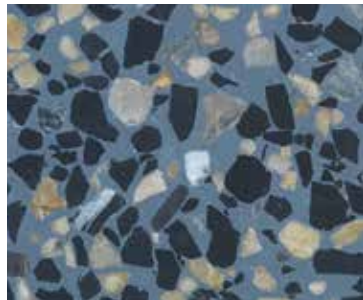

Thunderstorm



Fossil

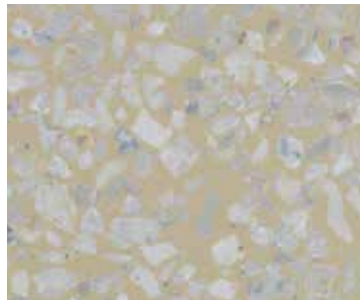


Sand Dune



Chocolate Chip Cookie Dough




Killer Whale

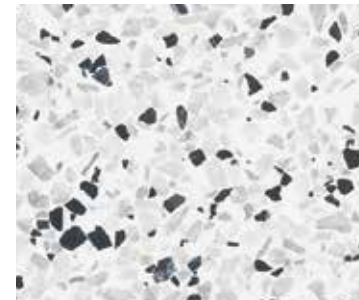

Birch Tree



Glacier

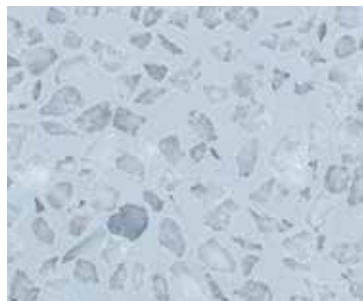


White Caps




American Pie



Butter Crunch

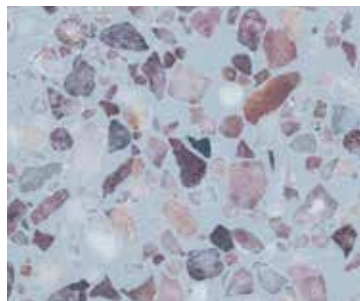


Champagne Toast

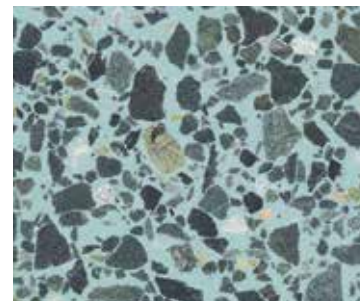


Barrier Reef




River Stone

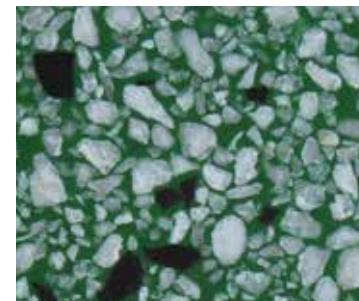


Shamrock

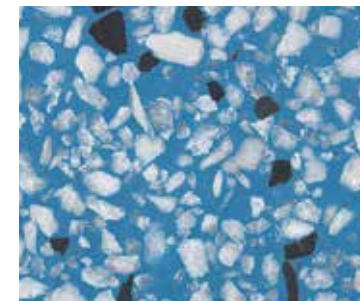

Summertime Blues

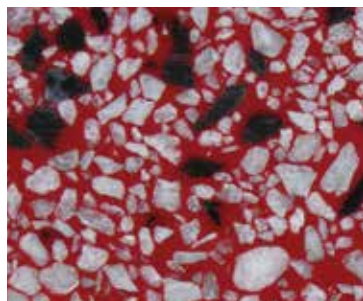

Fiesta

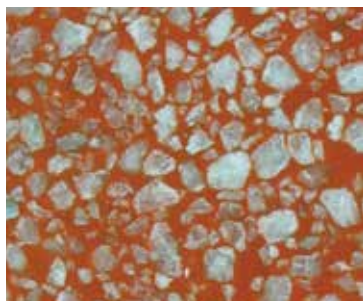

Starburst



Lemon Drop



Green Apple

Material
Homogeneous terrazzo floor covering

Weight
2.15 lbs/sq ft

Tile Sizes
2' x 2' and 2' x 4' FUSION System™ Panels

Thickness
3/16", 1/8" on request

Recycled Content
15% pre-consumer
20% post-consumer

Possible LEED v4 Credits
Material Resources (MR), HPD Available
Indoor Environmental Quality (IEQ), Low
Emitting Materials (adhesives) Mats Inc.
Perma-Bond is FloorScore Certified



Made in USA

	(Test) Requirement	Floorazzo™
Safety		
Critical Radiant Flux	(ASTM E648) Class 1: 0.45 w/cm ² or higher	Class 1, 1.09 w/cm ²
Static Coefficient of Friction	(ASTM D2047) Slip coefficient	0.80
Smoke Density	(ASTM E662) Maximum specific optical density: <450	Pass
Performance		
Antistatic Behavior	(EN 1815) Antistatic: less than 2 kilovolts (kV)	< 2 kV
Durability		
Static Load Limit	(ASTM F970)	Exceeds 1000 psi
Durometer Hardness	(ASTM D2240) Shore A: 0 - 100	> 100
Chemical Resistance	(ASTM F925) Best = no change	No change



floorazzo[™]

Floorazzo Tile, LLC
215 West Third Street
Siler City, NC 27344
Phone: 919.663.1684
customerservice@floorazzo.com

