


MM and Steam Unit Installation Template


Steam Unit can support
1 or 2 Steam Interfaces per Boiler Unit

Steam Unit can be placed
on either side of the
MM (coffee) Interface

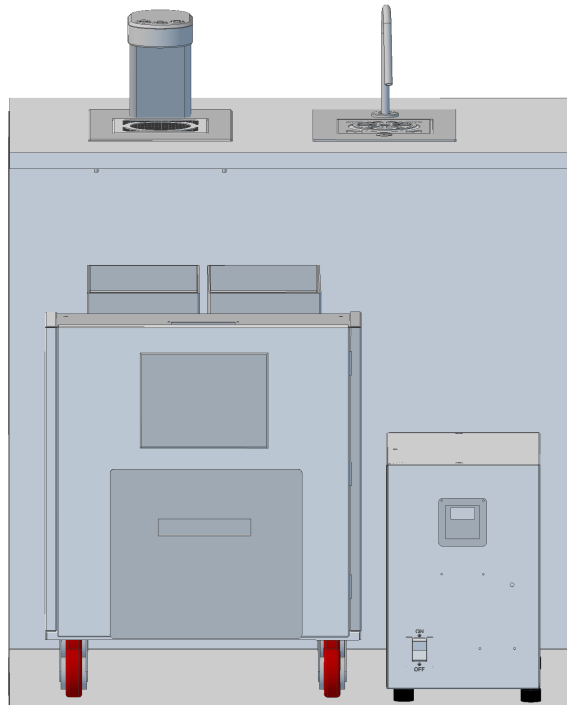

MM can be installed on a
concrete or solid floor.
It Must be able to pull out 8-12"
to refill the bean hopper
For Cabinet Installation
we have a custom slide option

Each Boiler Unit MM and Steam
Requires a 30amp Breaker
and Dedicated 3/8 water line

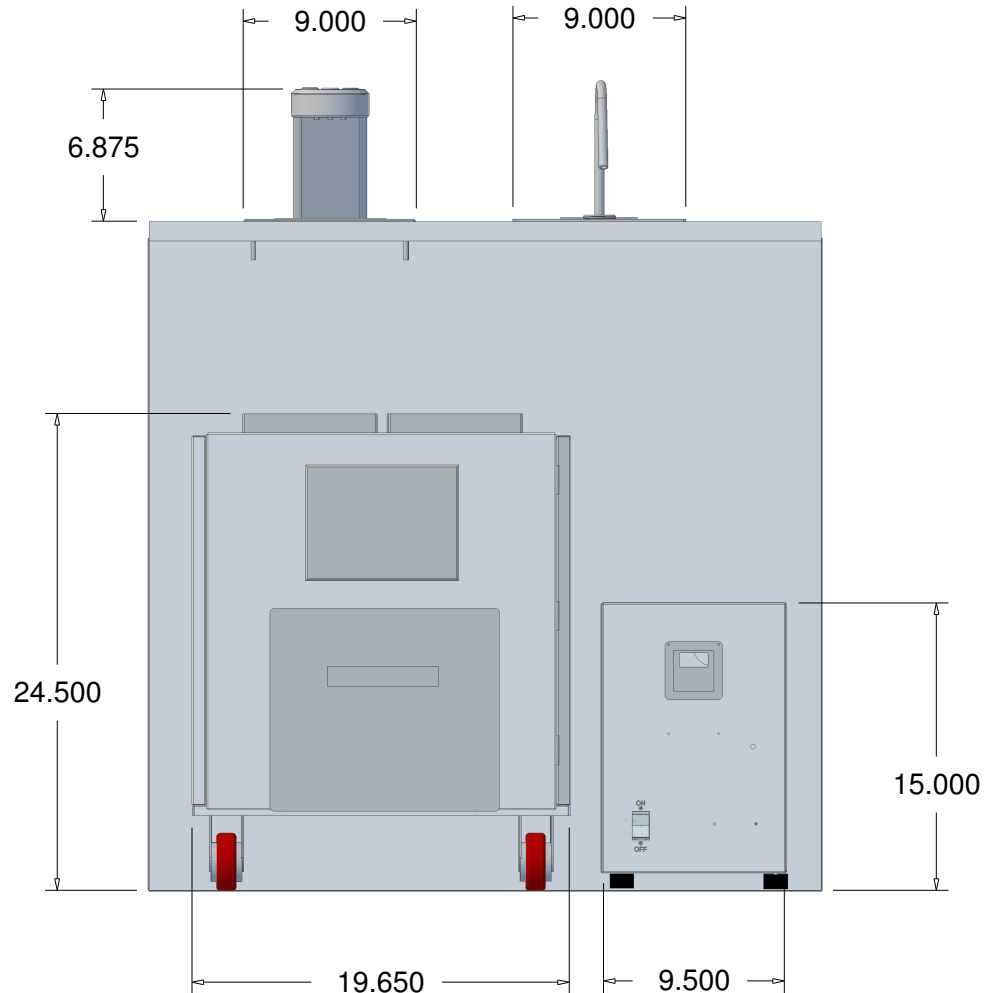

Depth MM and Steam Unit Boilers 21"
Depth MM and Steam Unit Interface 14"
Not shown external pump can be wall mounted
or place within 4 feet of MM
Pump 12"D x 5"W x 8"H