

outil.li



SPRING 2024
product overview

A close-up photograph of the lamp's components. On the left, a large, glowing, textured lampshade is shown from an angle, revealing a red dial inside. In the center, a smaller, peach-colored dial with a red top sits on a light gray surface. On the right, another large lampshade is shown, revealing a blue dial inside with a white cable plugged into it. Next to it, a green dial with a yellow top sits on the surface.

our company.

We aim to make fun utensils,
hence our name outil.li.

Our first product is a lamp with a wireless
companion. It allows direct control of light,
so that it always fits your use and context.

All our products are 3D-printed from
recycled, bio based, plastics and are
designed to be easily taken apart. We do
this to assure responsible production, use
and reuse.

A photograph showing the complete lamp and its control dials. On the left, a large, white, textured lamp with a rounded, cocoon-like shape is shown from a side profile, with a thin white cable extending from its left side. On the right, three control dials are arranged in a cluster: a peach dial with a red top, a green dial with a yellow top, and a white dial with a blue top.

our lamps.

Lightweight, floating, cloud-ish, cocoon-ish shapes,
that come in two sizes and vertically give off 360 degrees of light.



our dials.

Elegant visual anchors to our lamps. They allow direct, wireless,
control of both light temperature and brightness from any tabletop.






ou. 600 / 601



600 mm



350 mm

320 mm

TECHNICAL DATA

600 | 601

mounting

material

net weight

LED lifetime expectancy

colour temperature

system power

voltage

ceiling mount included

recycled plastics (rPLA)


1.0 kg

50,000 h


3000 K | 2700 - 6500 K

avrg. 7.5 W max. 16 W

220-240 V

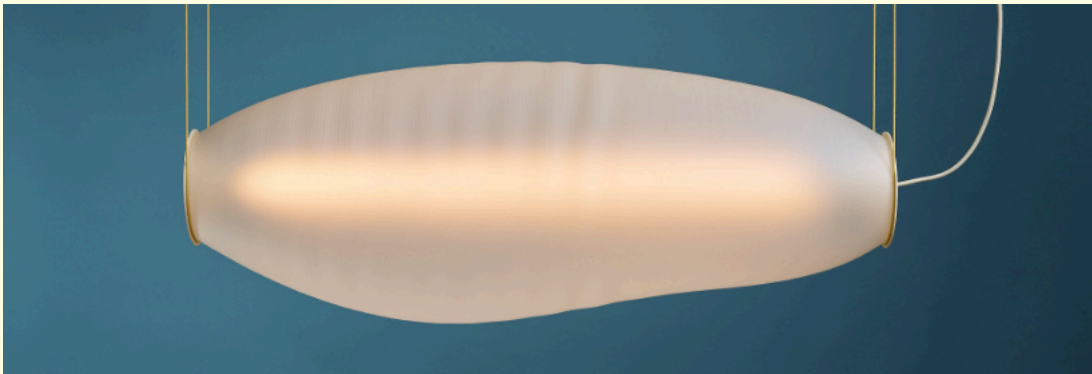

ou. 900 / 901

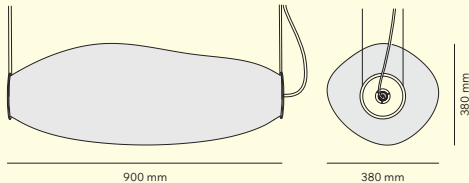

TECHNICAL DATA

900 | 901

mounting

ceiling mount included

material

recycled plastics (rPLA)

net weight

1.65 kg

LED lifetime expectancy

50,000 h

colour temperature




3000 K | 2700 - 6500 K

system power

avrg. 7.5 W max. 16 W

voltage

220-240 V

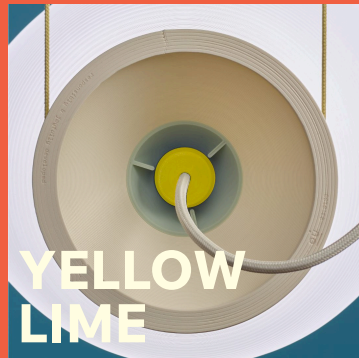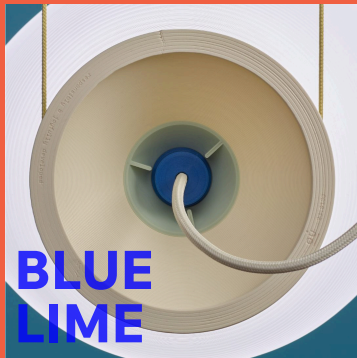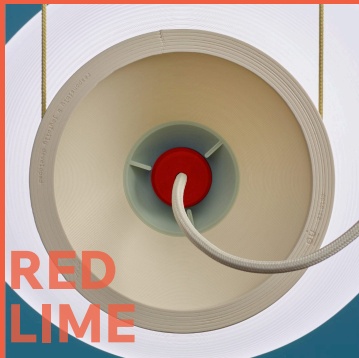





OU. DIAL



100 mm



100 mm

material

recycled plastics (rPLA)

net weight

0.6 kg

battery

2032 coin cell


compatibility

works with both **OU 601** & **OU 901**

E27 bulb with similar light control functionality available



**YELLOW
RED
BLUE**



**WITH
AN
OATMEAL
BASE**



**RED
YELLOW
BLUE**



**WITH
A
LIME
BASE**



**BLUE
YELLOW
RED**



**WITH
A
TERRA
BASE**





outil.li

Pijnackerplein 6B
3035 GB Rotterdam
the Netherlands

www.outil.li
contact@outil.li
[instagram.com/outil.li](https://www.instagram.com/outil.li)