


SP-1106: PERSONAL LIGHT & POWERBANK

The SP-1106 Personal Light and Power Bank is a multifunction flashlight, lantern and power bank. It is designed for outdoor activities and is water resistant. You can charge it by the micro USB port and then use it to charge your smart phone, tablet, or other USB digital device.



PRODUCT DESCRIPTION:

- (1) USB Port (DC output)
- (2) Micro USB (DC input)
- (3) Battery capacity check indicator (Blue)
- (4) Charging indicator (Green)
- (5) Battery capacity check button
- (6) Hanging Hook
- (7) LED Flashlight / Lantern




PRODUCT CHARACTERISTICS:

1. Size: 1.2" x 5"
2. Battery Capacity: 2200mAh
3. DC Output: 5.0V/800mA (Max)
4. DC Output: 5.0V/1A (Max)
5. LED Brightness: 1 Watt - 140 Lumens
6. 4 Light Settings: High / Medium / Low / Flashing Red
7. Time to charge the built-in battery by USB: 3 hours
8. Main material: Aluminum & ABS & Silicon
9. Net weight: 3.7 ounces

OPERATING INSTRUCTIONS:

CHARGING THE BATTERY:

Pull open the cover of the silicon cover on the bottom side of the flashlight. Use the provided USB cable to connect to the flashlight's micro USB port (small port). Connect the large USB plug into any female USB port for charging. While charging, the red indicators will light up. When the battery is fully charged, the blue indicator will stop flashing. (Picture below)

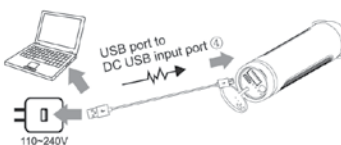


CHARGING MOBILE PHONES OR OTHER DIGITAL DEVICES:

Use the provided micro USB cable (small plug), to connect to the micro USB port of your phone or digital device. Remove the silicon cover and plug the large USB plug into the USB port on the bottom of the flashlight. It will begin charging and continue until the battery is charged or the flashlight battery is exhausted. For charging Apple products please use the USB cable provided with your device.



BATTERY CAPACITY CHECK:

Press the flashlight button briefly at the base of the flashlight to check the status of the battery charge. (As pictured at right) All blue LED lights means the battery is up to 71%-100% charge; 2 LED lights mean about 31%-70% charge; 1 LED light means about 5%-30% charge.




4 LIGHT MODES: HIGH / MEDIUM / LOW / FLASHING RED LIGHT

- Step 1: Press the base Power button for 3 seconds for high setting
- Step 2: Press the button again for medium setting
- Step 3: Press the button again for low setting
- Step 4: Press the button again for flashing red emergency light
- Step 5: Press for 3 seconds and the flashlight shuts down.

PRECAUTIONS:

- The product is rainproof & dust proof (Ip64) but should not be immersed in water.
- Do not throw into a fire to avoid the risk of explosion.

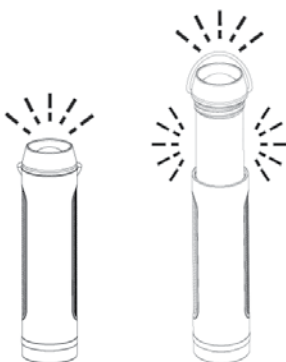

- Do not store the flashlight in hot (over 140°F), wet or corrosive environment.
- Do not store the flashlight on a vehicle's dashboard. When the dashboard temperature is over 140°F it will damage the built-in battery and bulge out.
- This product features intelligent protection against overcharge, over discharge, overload and short circuit protection function, effectively extending the battery life and mobile phone battery life. The dual protection design makes charging much safer.
- If the product fails to charge your phone, check one of the following options.
 - 1.) Check whether the plug adapter is suitable for your mobile phone or digital device.
 - 2.) Check whether the battery shuts down automatically. If yes, just activate the product by charging the battery.
 - 3.) If the charger has not been used six months, the battery power may be exhausted. If the charging indicator is weak, the charger cannot charge your mobile phone. To solve this problem, use the provided USB cable to recharge the battery for 2-3 hours, then it will get back to work. In order to prolong the battery life time, charge it at least once every six months.

- This is not a toy; please keep it away from children.

LIMITED 1 YEAR WARRANTY

Maverick Industries Inc. warrants this product to be free of defects in parts, materials and workmanship for a period of 1 year, from date of purchase. Should any repairs or servicing under this warranty be required, contact Maverick Customer Service by mail or phone for instructions on how to pack and ship the product to Maverick's National Service Center located as follows:

Maverick Customer Service: 94 Mayfield Ave., Edison NJ 08837
Telephone: (732) 417-9666 • Hours: Weekdays 8:30 AM- 4:30 PM

Do not send any parts or product to Maverick without calling and obtaining a Return Authorization Number and instructions.

This warranty is VOID if instructions for use are not followed; for accidental damage; for commercial use; for damage incurred while in transit; or if the product has been tampered with.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



www.maverickhousewares.com
www.securproducts.com

CHARGING:

- 1). Solar Charging: Unfold the three solar panels and place in direct sunlight. For best results face directly into the sun. The red indicator light will be lit while charging. When fully charged the light will turn green.
- 2). Charging from External USB Power Supply: Using the provided USB cable, plug the large male USB plug into any USB power supply – laptop, A/C adaptor, D/C adaptor. On the lantern, lift open the small protective cover and plug the small micro USB plug into the Lantern. While charging the red indicator light will be lit. When fully charged the indicator light will turn green.

PRECAUTIONS:

- Never point the LED lights directly into the eyes.
- In order to prolong the lifespan of the battery, you should charge it at least once every six months.
- Do not use in excessive humidity and do not immerse in water.
- Do not use in temperatures above 120 degrees or below 0 degrees Fahrenheit.
- Do not drop or hit this product.

LIMITED 1 YEAR WARRANTY

Maverick Industries Inc. warrants this product to be free of defects in parts, materials and workmanship for a period of 1 year, from date of purchase. Should any repairs or servicing under this warranty be required, contact Maverick Customer Service by mail or phone for instructions on how to pack and ship the product to Maverick's National Service Center located as follows:

Maverick Customer Service: 94 Mayfield Ave., Edison NJ 08837
Telephone: (732) 417-9666 • Hours: Weekdays 8:30 AM- 4:30 PM

Do not send any parts or product to Maverick without calling and obtaining a Return Authorization Number and instructions.

This warranty is VOID if instructions for use are not followed; for accidental damage; for commercial use; for damage incurred while in transit; or if the product has been tampered with.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



www.maverickhousewares.com
www.securproducts.com