

SP-1107: FOLDABLE SOLAR LANTERN

Thank you for purchasing the SP-1107 Folding Solar Lantern from Secur products. The SP-1107 combines high power LEDs with folding solar panels for independent use outdoors. One touch operation makes it simple to operate and folding solar panels make it easy to carry and store. You can charge the lantern with any USB power source or directly from the sun.

FUNCTIONS & FEATURES:

- ▶ Three lights settings: high, low and flashing emergency light.
- ▶ Super bright LEDs.
- ▶ Charge with built-in solar panels or any USB power source.
- ▶ Folding solar panels give the maximum charging surface yet allows for easy carrying and storage.
- ▶ Single light switch for easy operation.
- ▶ Built-in hanging ring to hang over a picnic table, in a tent or anywhere outdoors – charges during the day and lights up your night.
- ▶ Built-in smart protection chip prevents over charging protection, over-discharge and short circuits.

PRODUCT DESCRIPTION:

Lumens in High Mode - 100

Lumens in Low Mode - 50

Lighting time on high setting with full battery charge – 2 hours

Lighting time on low setting with full battery charge – 4 hours

Lighting time in flashing mode with full battery charge – 8 hours

External power input cord – micro USB

Input power – 400mA 5 volts

Charging time with solar panels under direct sun light – 12 hours

Product Weight: 5.9 ounces

Product Size: Closed: 2.5" Diameter x 6" height, Opened: 11.5" diameter x 1" height

Built-in Battery Capacity: 680mAh 3.7 volts - lithium ion battery

Solar Panels: 4.5 volts (fluctuating) - .9 watts


LED Specifications: 18 LEDs – White light – 6000 – 6500K

OPERATING INSTRUCTIONS:

LANTERN OPERATION:

To use the Lantern, open the folding solar panels and use the light control switch to turn the light off and on:

- Press once for low level LED lantern
- Press twice for high level LED lantern
- Press three times for flashing emergency function
- Press a fourth time to turn off.

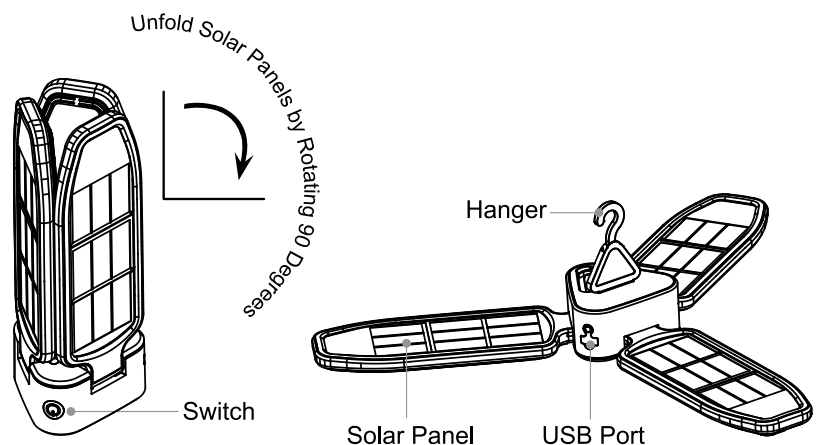

CHARGING:

- 1). Solar Charging: Unfold the three solar panels and place in direct sunlight. For best results face directly into the sun. The red indicator light will be lit while charging. When fully charged the light will turn green.
- 2). Charging from External USB Power Supply: Using the provided USB cable, plug the large male USB plug into any USB power supply – laptop, A/C adaptor, D/C adaptor. On the lantern, lift open the small protective cover and plug the small micro USB plug into the Lantern. While charging the red indicator light will be lit. When fully charged the indicator light will turn green.

PRECAUTIONS:

- Never point the LED lights directly into the eyes.
- In order to prolong the lifespan of the battery, you should charge it at least once every six months.
- Do not use in excessive humidity and do not immerse in water.
- Do not use in temperatures above 120 degrees or below 0 degrees Fahrenheit.
- Do not drop or hit this product.

LIMITED 1 YEAR WARRANTY

Maverick Industries Inc. warrants this product to be free of defects in parts, materials and workmanship for a period of 1 year, from date of purchase. Should any repairs or servicing under this warranty be required, contact Maverick Customer Service by mail or phone for instructions on how to pack and ship the product to Maverick's National Service Center located as follows:

Maverick Customer Service: 94 Mayfield Ave., Edison NJ 08837
Telephone: (732) 417-9666 • Hours: Weekdays 8:30 AM- 4:30 PM

Do not send any parts or product to Maverick without calling and obtaining a Return Authorization Number and instructions.

This warranty is VOID if instructions for use are not followed; for accidental damage; for commercial use; for damage incurred while in transit; or if the product has been tampered with.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



www.maverickhousewares.com
www.securproducts.com