


**ZERO**<sup>®</sup>

TRAPETS

PENDLAR/PENDANTS

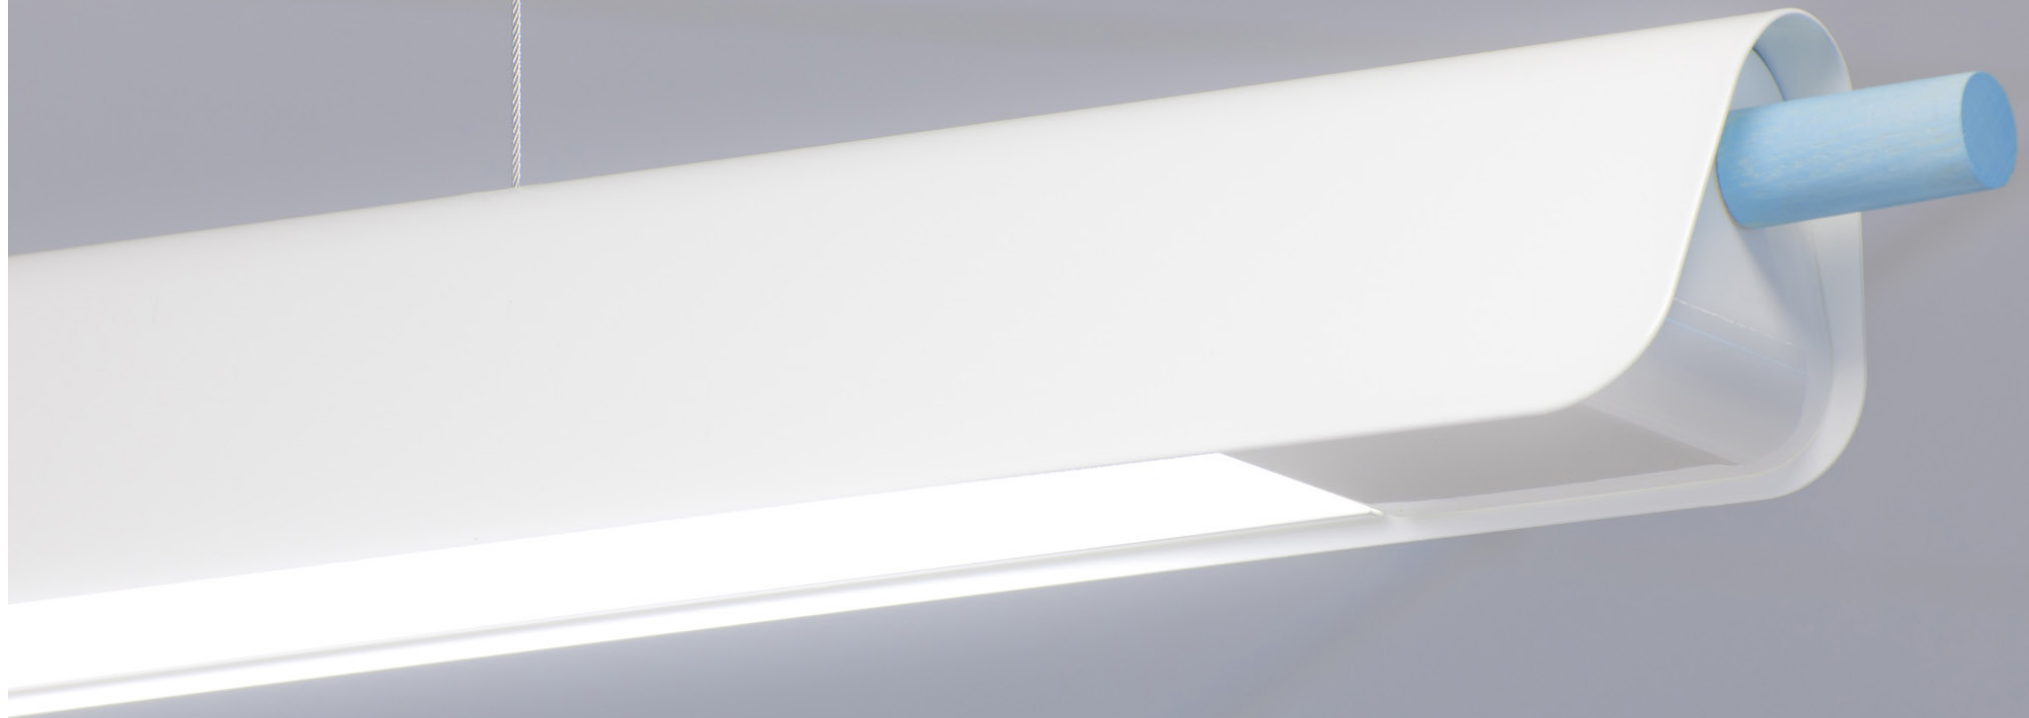

**ZERO®**

# TRAPETS

PENDLAR/PENDANTS

## Utförande

Vit- RAL 9010 alt svartlackerad RAL 9005 metall, andra färger på begäran.  
Träknoppar av ask natur alt. betsade. Bländskydd av microprisma. Går att koppla samman genom att använda mellankoppling.

## LED info

Systemeffekt se tabell. Armaturlumen se produkttabell. Korrelerad färgtemperatur 3000K alt 4000K. Färgtolerans SDCM 3. Färgåtergivning RA >80

## Montage

Pendlas i 2 meter vajer.

## Anslutning

Stickpropp alt. kopplingsplint 5x4mm<sup>2</sup>.

## Design

Note Design Studio 2011.



## Finish

White RAL 9010 or black RAL 9005 painted metal, other colors on request. Wood knobs in natural ash or stained yellow or white as standard, other stains on request. Diffuser of microprisma. Can be mounted together in rows by using the connector knob.

## LED info

System power: see product specification. Luminaire Luminous Flux: see product specification. CCT 3000K or 4000K. SDCM 3. CRI >80.

## Installation

Pendant, 2 m wire.


## Connection

Plug or terminal block 5x4mm<sup>2</sup>.

## Design

Note Design Studio 2011.

Exempel på sammankoppling/Example on connected rows

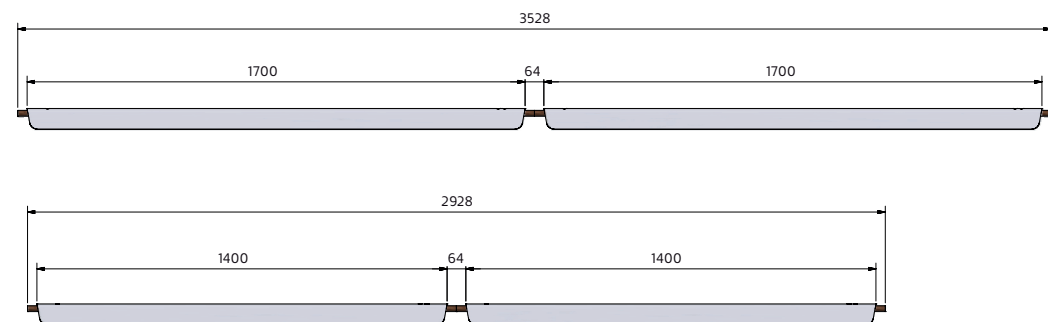

**ZERO® TRAPETS**

PENDLAR/PENDANTS


**PRODUKTFAKTA/PRODUCT SPECIFICATION - Vit/White 3000K**


| Effekt/Power | LJUSFLÖDE/LUMINAIRE FLUX | KELVIN | CRI | FÄRG/COLOUR | L/MM | LJUS/LIGHT                   | ART.         |
|--------------|--------------------------|--------|-----|-------------|------|------------------------------|--------------|
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8200-1-01    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8200-1-01HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8200-3-01    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8200-3-01HFF |
| LED 17W      | 1552LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8202-1-01    |
| LED 17W      | 1552LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8202-1-01HFF |
| LED 33W      | 2516LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8203-1-01    |
| LED 33W      | 2516LM                   | 3000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8203-1-01HFF |
| LED 26W      | 2081LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8202-3-01    |
| LED 26W      | 2081LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8202-3-01HFF |
| LED 40W      | 3220LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8203-3-01    |
| LED 40W      | 3220LM                   | 3000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8203-3-01HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8201-1-01    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8201-1-01HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8201-3-01    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8201-3-01HFF |
| LED 33W      | 2474LM                   | 3000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8204-1-01    |
| LED 33W      | 2474LM                   | 3000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8204-1-01HFF |
| LED 40W      | 3166LM                   | 3000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8204-3-01    |
| LED 40W      | 3166LM                   | 3000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8204-3-01HFF |

HFF = Dimmbar DALI, SwitchDim, DSI.

| TILLBEHÖR/ACCESSORIES         | FÄRG/COLOUR | MODELL/MODEL     |            |
|-------------------------------|-------------|------------------|------------|
| Träknopp, ände/Wood knob, end | Vit/White   | Ändkopp/End knob | 98200-1-01 |
| Träknopp, ände/Wood knob, end | Svart/Black | Ändkopp/End knob | 98200-1-06 |
| Träknopp, ände/Wood knob, end | Gul/Yellow  | Ändkopp/End knob | 98200-1-14 |
| Träknopp, ände/Wood knob, end | Ask/Ash     | Ändkopp/End knob | 98200-1-37 |
| Träknopp, ände/Wood knob, end | Grå/Grey    | Ändkopp/End knob | 98200-1-86 |
| Dragdimmer/Pull to dim switch | -           |                  | 98202-1-01 |

**ZERO®****TRAPETS**

PENDLAR/PENDANTS

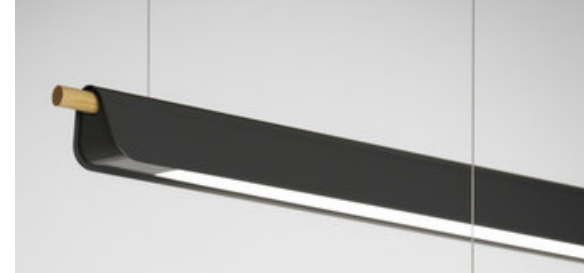**PRODUKTFAKTA/PRODUCT SPECIFICATION - Svart/Black 3000K**

| Effekt/Power | LJUSFLÖDE/LUMINAIRE FLUX | KELVIN | CRI | FÄRG/COLOUR | L/MM | LJUS/LIGHT                   | ART.         |
|--------------|--------------------------|--------|-----|-------------|------|------------------------------|--------------|
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8200-1-06    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8200-1-06HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8200-3-06    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8200-3-06HFF |
| LED 17W      | 1552LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8202-1-06    |
| LED 17W      | 1552LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8202-1-06HFF |
| LED 33W      | 2516LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8203-1-06    |
| LED 33W      | 2516LM                   | 3000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8203-1-06HFF |
| LED 26W      | 2081LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8202-1-06    |
| LED 26W      | 2081LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8202-1-06HFF |
| LED 40W      | 3220LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8203-3-06    |
| LED 40W      | 3220LM                   | 3000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8203-3-06HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8201-1-06    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8201-1-06HFF |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8201-3-06    |
| T5/25/28W    | 2600LM                   | 3000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8201-3-06HFF |
| LED 33W      | 2474LM                   | 3000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8204-1-06    |
| LED 33W      | 2474LM                   | 3000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8204-1-06HFF |
| LED 40W      | 3166LM                   | 3000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8204-3-06    |
| LED 40W      | 3166LM                   | 3000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8204-3-06HFF |

HFF = Dimmbar DALI, SwitchDim, DSI.

| TILLBEHÖR/ACCESSORIES                 | FÄRG/COLOUR | MODELL/MODEL               |            |
|---------------------------------------|-------------|----------------------------|------------|
| Träknopp, mellan/Wood knob, connector | Vit/White   | Mellanknopp/Connector knob | 98201-1-01 |
| Träknopp, mellan/Wood knob, connector | Svart/Black | Mellanknopp/Connector knob | 98201-1-06 |
| Träknopp, mellan/Wood knob, connector | Gul/Yellow  | Mellanknopp/Connector knob | 98201-1-14 |
| Träknopp, mellan/Wood knob, connector | Ask/Ash     | Mellanknopp/Connector knob | 98201-1-37 |
| Träknopp, mellan/Wood knob, connector | Grå/Grey    | Mellanknopp/Connector knob | 98201-1-86 |

**ZERO®****TRAPETS**

PENDLAR/PENDANTS



## PRODUKTFAKTA/PRODUCT SPECIFICATION - 4000K

| Effekt/Power | LJUSFLÖDE/LUMINAIRE FLUX | KELVIN | CRI | FÄRG/COLOUR | L/MM | LJUS/LIGHT                   | ART.         |
|--------------|--------------------------|--------|-----|-------------|------|------------------------------|--------------|
| LED 17W      | 1710LM                   | 4000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8202-1-01-40 |
| LED 17W      | 1710LM                   | 4000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8202-1-01D40 |
| LED 33W      | 2290LM                   | 4000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8203-1-01-40 |
| LED 33W      | 2290LM                   | 4000K  | >80 | Vit/White   | 1400 | Nedljus/Down light           | 8203-1-01D40 |
| LED 26W      | 2768LM                   | 4000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8202-3-01-40 |
| LED 26W      | 2768LM                   | 4000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8202-3-01D40 |
| LED 40W      | 3540LM                   | 4000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8203-3-01-40 |
| LED 40W      | 3540LM                   | 4000K  | >80 | Vit/White   | 1700 | Nedljus/Down light           | 8203-3-01D40 |
| LED 33W      | 2710LM                   | 4000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8204-1-01-40 |
| LED 33W      | 2710LM                   | 4000K  | >80 | Vit/White   | 1400 | Ned + uppljus/Down + uplight | 8204-1-01D40 |
| LED 40W      | 3482LM                   | 4000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8204-3-01-40 |
| LED 40W      | 3482LM                   | 4000K  | >80 | Vit/White   | 1700 | Ned + uppljus/Down + uplight | 8204-3-01D40 |
| LED 17W      | 1710LM                   | 4000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8202-1-06-40 |
| LED 17W      | 1710LM                   | 4000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8202-1-06D40 |
| LED 33W      | 2290LM                   | 4000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8203-1-06-40 |
| LED 33W      | 2290LM                   | 4000K  | >80 | Svart/Black | 1400 | Nedljus/Down light           | 8203-1-06D40 |
| LED 26W      | 2768LM                   | 4000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8202-3-06-40 |
| LED 26W      | 2768LM                   | 4000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8202-3-06D40 |
| LED 40W      | 3540LM                   | 4000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8203-3-06-40 |
| LED 40W      | 3540LM                   | 4000K  | >80 | Svart/Black | 1700 | Nedljus/Down light           | 8203-3-06D40 |
| LED 33W      | 2710LM                   | 4000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8204-1-06-40 |
| LED 33W      | 2710LM                   | 4000K  | >80 | Svart/Black | 1400 | Ned + uppljus/Down + uplight | 8204-1-06D40 |
| LED 40W      | 3482LM                   | 4000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8204-3-06-40 |
| LED 40W      | 3482LM                   | 4000K  | >80 | Svart/Black | 1700 | Ned + uppljus/Down + uplight | 8204-3-06D40 |

D = Dimmbar DALI, SwitchDim, DSI.

**ZERO**<sup>®</sup>

# TRAPETS

PENDLAR/PENDANTS



## NOTE DESIGN STUDIO

Creativity is about searching for what is missing, to constantly realign thoughts and expressions to find that moment of insight when everything clicks. At Note we collaborate intensely, with personal passion and our design disciplines – interior, product, graphic, architecture, and strategies – to share our insights with the world.

**ZERO**<sup>®</sup> TRAPETS  
PENDLAR/PENDANTS



Special lackerad i rött/Custom painted in red

The ZERO logo consists of the word "ZERO" in white, uppercase, sans-serif font, set against a solid red square background.

TRAPETS

PENGLAR/PENDANTS



**Head office:**

Pukebergarnas väg,  
SE-382 28 Nybro, Sweden  
+46(0)481 800 00  
info@zero.se

**Showroom Stockholm:**

Södermalmsallén 36,  
SE-118 28 Stockholm, Sweden  
+46(0)8-545 850 00

info@zero.se