


FIHI-65V00

Highpass Filter, 60 – 100 GHz

Features

- Low Cost
- High Rejection
- High Power Handling

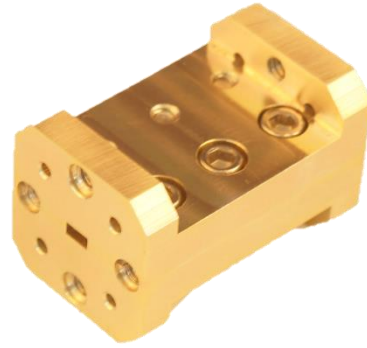

Electrical Specification:

| | Min | Nominal | Max | Unit |
|--------------------|---------------------|---------|-----|------|
| Passband Frequency | 65 | | 100 | GHz |
| Insertion Loss | | 0.5 | | dB |
| Return Loss | | 15 | | dB |
| Rejection (40 dB) | | 61.0 | | GHz |
| Ports | WR-15, UG-385/U | | | |
| Size | 1.25" x .75" x .75" | | | |

