
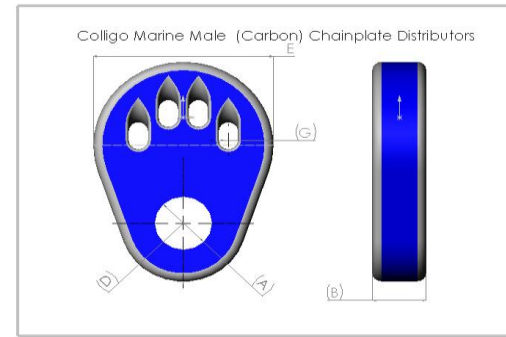


Colligo Marine Chainplate Distributor Sizing Chart

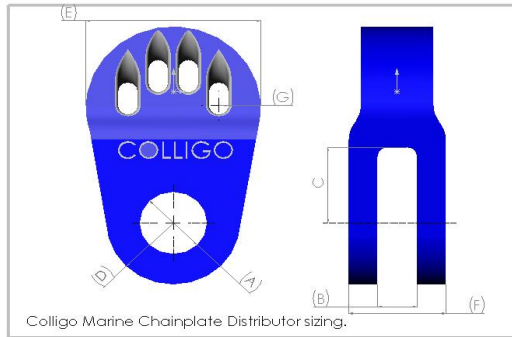

	A	B	C	D	E	F	G						
Part Number	Pin Size with Sleeve	Hole Size without Sleeve	Slot Size/Width	Throat Depth	Section Diameter	Overall Diameter	Overall Width	Lashing Line Slot Size	Lashing Holes	Safe Working Load (lbs-f)	Break Strength (lbs-f)	wt	Comments
Traditional Chainplate Distributors	CSS60	0.25" (6.4mm)	0.25" (6.4mm)	.19" (6mm)	.97" (24.6mm)	.353" (9mm)	7/8" 922mm)	.7" (18mm)	1/4" (6.4mm)	2	4,000	8,000	1.1 oz (27grams) Not Sleeved- recommend Isolating Gel (teflon)
	CSS61	.5" (12.8mm)	.625" (15.875mm)	.313" (7.94mm)	743" (18.86mm)	.67" (17mm)	2.16" (54.88mm)	.98" (25mm)	1/4" (6.4mm)	4	9,000	19,000	5.5 oz (31 grams) Custom sleeved to smaller sizes.
	CSS62	.625" (15.875mm)	.875" (22.23)	.51" (13mm)	1.06" (27mm)	.87" (22mm)	2.28" (57.72mm)	1.26" (32mm)	1/4" (6.4mm)	4	12,500	25,000	7.6 oz (215 grams) Custom sleeved to smaller sizes.
	CSS62.5	.625" (15.875mm)	.875" (22.23)	.787" (20mm)	1.26" (32mm)	1.89" (48mm)	2.68" (68mm)	1.57" (40mm)	5/16" (8mm)	4	16,000	32,000	10.8 oz (307 grams) Custom sleeved to smaller sizes.
	CSS63	0.875" (22.225mm)	1.25" (31.75mm)	.875" (22mm)	1.96" (49.78)	2.2" (56mm)	2.75" (69.89mm)	2.4" (61mm)	5/16" (8mm)	4	29,000	58,000	1 lb 8 oz (682 grams) Custom sleeved to smaller sizes.
	CSS95	.5" (12.8mm)	.625" (15.875mm)	.353" (9mm)	.564" (14.33)	1.18" (30mm)	1.89" (48mm)	.98" (25mm)	1/4" (6.4mm)	3	7,000	14,000	2.4 oz (68 grams) Mini Series, Custom sleeved to smaller sizes
	CSS95L	.5" (12.8mm)	.625" (15.875mm)	.353" (9mm)	1.42" (36mm)	1.18" (30mm)	1.89" (48mm)	.98" (25mm)	1/4" (6.4mm)	3	7,000	14,000	3.9 oz (110 grams) Sprint 750 Series (Forestay)
Male (Carbon) Chainplate Distributors	CSS90	0.25" (6.4mm)	0.25" (6.4mm)	.39" (9.94mm)		.7" (18mm)	.875" (22mm)	.394" (10mm)	1/4" (6.4mm)	2	3,000	7,000	1 oz (27 grams) Not Sleeved- recommend Isolating Gel (teflon)
	CSS91	.5" (12.8mm)	.625" (15.875mm)	.55" (13.94MM)		1.34" (34mm)	2.16" (54.88mm)	.55" (14mm)	1/4" (6.4mm)	4	7,000	14,000	4 oz (114 grams) Custom sleeved to smaller sizes.
	CSS92	.625" (15.875mm)	3/4" (19.05 mm)	.71" (18mm)		.83" (21mm)	2.36" (60mm)	.7" (18mm)	1/4" (6.4mm)	4	12,500	25,000	6 oz (171 grams) Custom sleeved to smaller sizes.
	CSS93	.750" (19.05mm)	1" (25.4mm)	.71" (18mm)		2.36" (60mm)	2.52" (64mm)	.875" (22mm)	5/16" (8mm)	4	23,500	47,000	8 oz (229 grams) Custom sleeved to smaller sizes.
	CSS94	.375" (9.525)	.5" (12.8mm)	.39" (9.94mm)		1.18" (30mm)	1.89" (48mm)	.315" (8mm)	1/4" (6.4mm)	3	4,250	8,500	1.9oz (55 grams) Mini Series, Sleeved down from 5/8". Can be sleeved to 1/2"
SnapShackle Distributor	CSS96	.375" (9.525)	.5" (12.8mm)	.55" (13.94mm)		1.1" (28mm)	50	1.26" (32mm)	0.5" (12mm)	2	6,500	13,000	5.7 oz (162 grams) Tylaska Snapshackle, can also be used with Soft Shackle.