

TABLE OF CONTENTS

Selection of Correct Kit; Dimensions and Weights	1
Guidelines for Location of Vacuum Holsters™	2
Suspension Detail - Extended Duct Suspension Kit.....	3

SELECTION OF CORRECT KIT

4" Vacuum Holsters™ can be suspended directly from the exhaust duct manifold. In order to ensure that the bottom rim of the tailpipe adapter is 6'6" AFF, there are two basic installation arrangements.




1. Direct to duct suspension, in which the exhaust hose of the Vacuum Holster™ is connected directly to the duct manifold. Typically, this method is suitable when the bottom of the duct manifold is 13' or less AFF (Diagram 1 below).

NOTE: If the duct is very low AFF (typically 12'0" or less), the installer may cut the Hose Holster to a shorter length, provided the cut does not exceed 16" (Diagram 2).

2. Extended direct to duct suspension is generally used when


the bottom of the duct manifold is 13' or more AFF. The installation contractor supplies a piece of spiral duct (called the *duct spacer*), which is placed between the exhaust hose of the Vacuum Holster™ and the spiral duct manifold. To ensure that the bottom rim of the tailpipe adapter is 6'6" AFF, the length of the duct spacer must be sized per application. With extended duct suspension, it should never be necessary to cut the Hose Holster to a shorter length. See diagram 3 below.

The height of the duct manifold AFF is the key measurement to determine the proper suspension method. Due to variance in the types of takeoff fittings that may be installed, the above measurements of duct manifold AFF should be used as guidelines, and not as hard-and-fast-rules.

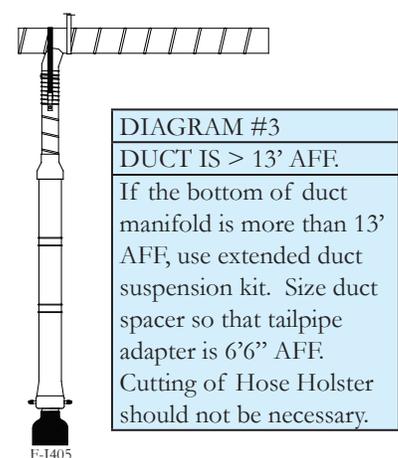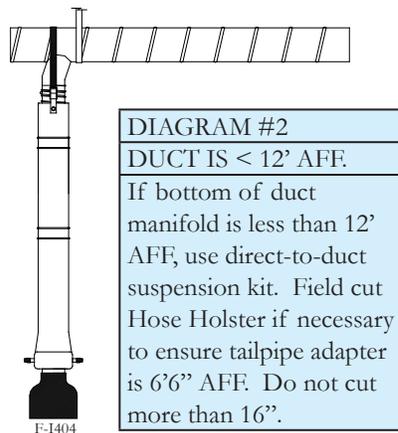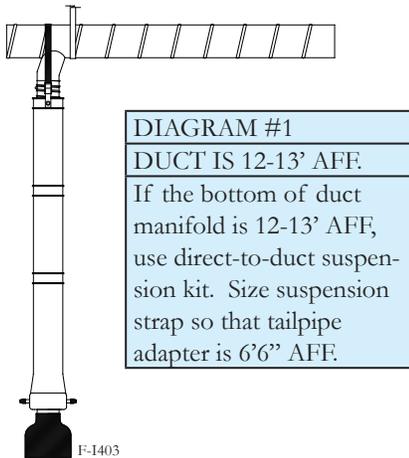

DIMENSIONS AND WEIGHTS

Dimensions & Weights - Vacuum Holster™ Assembly		
Hose Holster Model	4" Compact*	4" Extended
A - Hose Holster Height	40"	56"
B - Tailpipe Adapter below Hose Holster	8 3/4"	8 3/4"
C - Total Height Vacuum Holster™	48 3/4"	64 3/4"
D - Width, Hose Holster Body	5 3/8"	5 3/8"
E - Width, Damper Axle	10 1/4"	10 1/4"
*Note: For Compact Holsters, A, B, and C are minimums. The installer may field-cut the Holster to a length between the two figures.		
Weight - Vacuum Holster™ w/ 17' Hose	20 lbs.	22 lbs.
Weight - Vacuum Holster™ w/ 20' Hose	22 lbs.	24 lbs.
Weight - Vacuum Holster™ w/ 23' Hose	n/a	26 lbs.

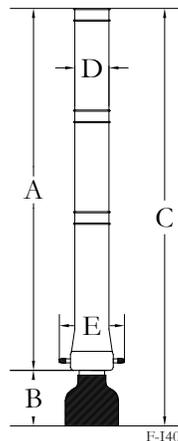


I-A4E-02

GUIDELINES FOR LOCATION OF 4" VACUUM HOLSTERS™, SIDE VIEW

Ascent Systems strongly encourages the system designer to consider the location of the vehicle hoists when designing the spiral duct manifold.

Determine what the probable longest vehicle will be, and estimate


where its bumper will be located when the vehicle is positioned on the hoist. To ensure the exhaust hose does not have to wrap around a vehicle, locate the duct manifold 1 or 2 feet behind the bumper of the longest vehicle.

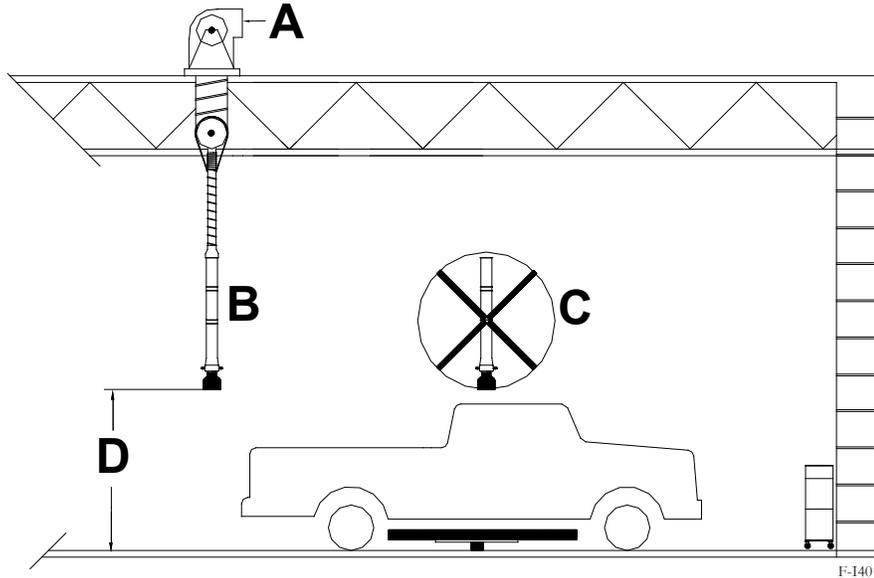

Note	Comment
A	Outdoor fan placement is strongly recommended.
B	CORRECT LOCATION: The Vacuum Holsters™ hang 1-2' behind the bumper of the largest vehicle on the hoist.
C	WRONG LOCATION: Here, the Vacuum Holster™ is too far forward, potentially creating a coverage issue.
D	Bottom rim of tailpipe adapter recommended to be 6'6" AFF. Please confirm with owner rep before installing.

GUIDELINES FOR LOCATION OF 4" VACUUM HOLSTERS™, END VIEW

Ascent Systems strongly encourages the system designer to locate the Vacuum Holsters™ between the service bays.

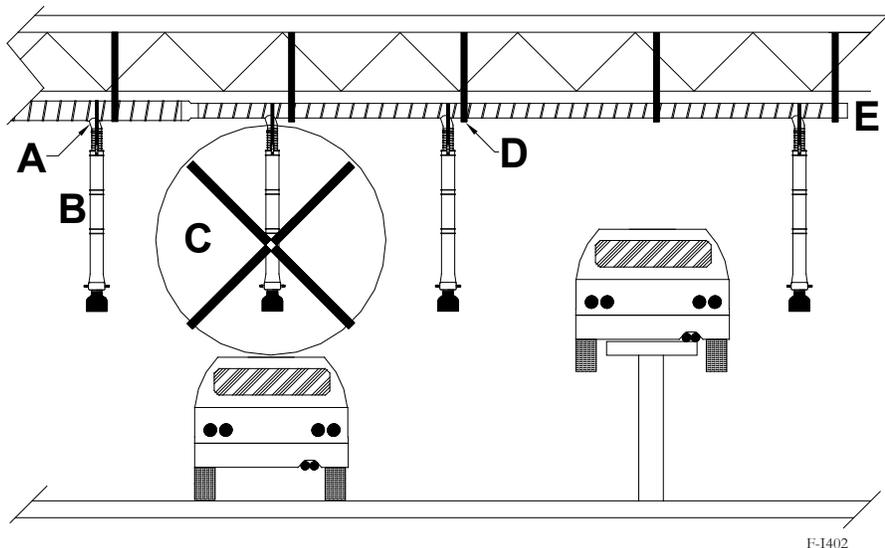

Note	Comment
A	Use a take-off fitting with 4" diameter.
B	CORRECT LOCATION: The Vacuum Holsters™ hang between the service bays.
C	WRONG LOCATION: Avoid placing Vacuum Holsters™ in the middle of the service bay.
D	Place a duct support strap near each Vacuum Holster.
E	Do not use elbows at the end of a run of spiral duct. Extend the duct manifold past the Vacuum Holster, and terminate the run with a plug. The suspension strap cannot loop over an elbow.

Introduction

This installation method is most suitable for 4" Vacuum Holsters, when the bottom of the duct manifold is more than 13' AFF.

Part #, Extended Duct Suspension Kit: A4EHS.

Each suspension kit includes:


- 1) 10' of suspension strap;
- 2) 2 self-tapping screws with fender washers to secure the suspension strap to the manifold;
- 3) A 4" x 1' flexible hose with two hose clamps to connect the takeoff to the duct spacer;
- 4) Hardware to connect the duct spacer to the suspension strap;
- 5) Two couplers, for each end of the duct spacer;
- 6) One hose clamp to connect the exhaust hose of the Vacuum Holster to the duct spacer;
- 7) A Duct-to-Hose Holster reducer, which connects the Hose Holster to the duct spacer.

By Installer


- Duct support strap near takeoff
- Spiral duct manifold, 26 gauge minimum. For 4" Holsters, bottom of duct manifold to be 13' or more AFF.
- Takeoff fitting. Diameter to match exhaust hose.
- Installer-supplied duct spacer. Diameter to match diameter of exhaust hose. Two couplers are provided, one for each end, to facilitate hose connections. Bottom of duct spacer to be 12'0" AFF.

By Ascent


- The suspension strap loops over the manifold and is secured by screws and fender washers. Two cam grip-cleats connect the suspension strap to the duct spacer.
- Flexible hose connects takeoff to duct spacer.
- Duct-to-Holster adapter attaches Hose Holster to the duct spacer. Connect exhaust hose of Vacuum Holster before fastening Duct-to-Holster Adapter.
- Vacuum Holster assembly to include Hose Holster cylinder, exhaust hose, tailpipe adapter, rotational damper, and hose clamps. Hose Holster can pivot and move freely.
- Bottom rim of tailpipe adapter recommended to be 6'6" AFF

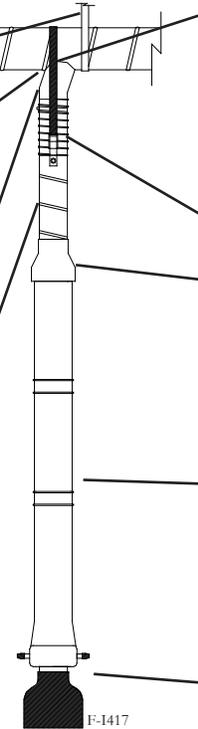

SUSPENSION DETAIL - SIDE VIEW

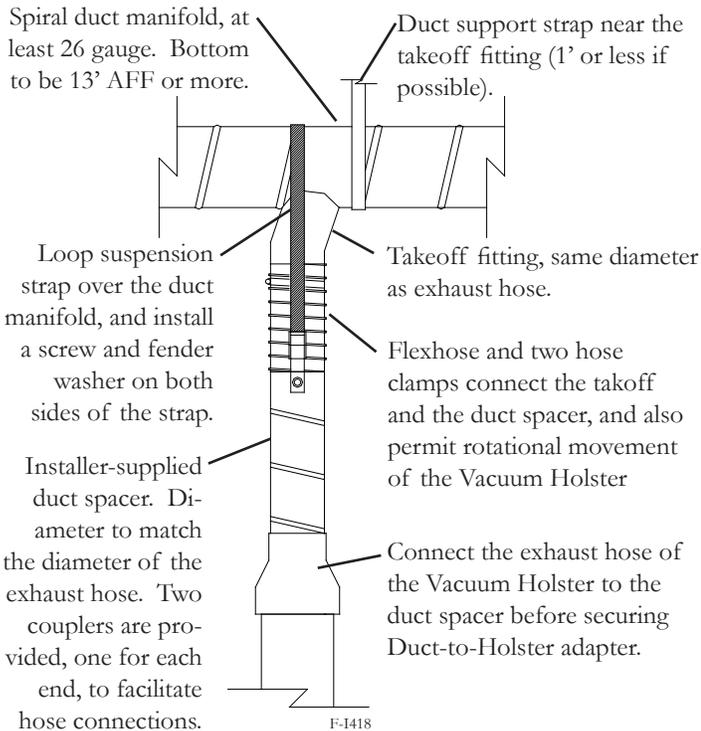

SUSPENSION DETAIL - END VIEW

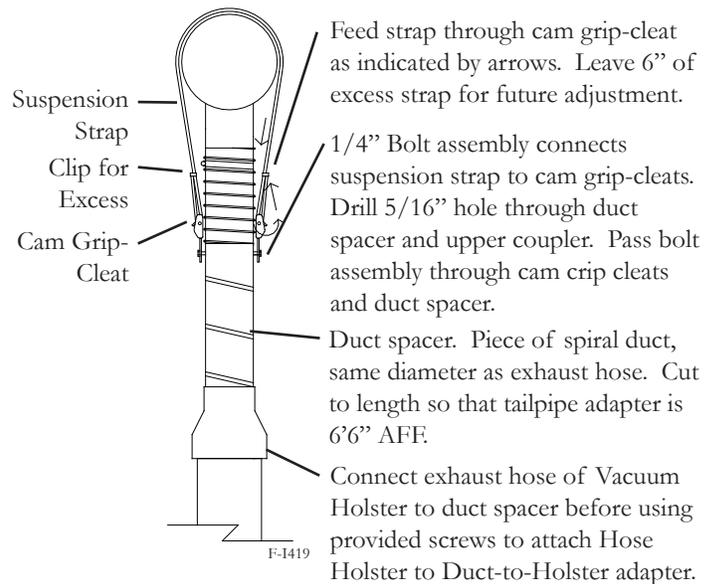

To attain correct clearance AFF, the lower rim of the duct spacer to be 12'0" AFF.