


FRESH VAC®

**Modified Atmosphere
Packaging Machines**

“All Stainless” A-200 C

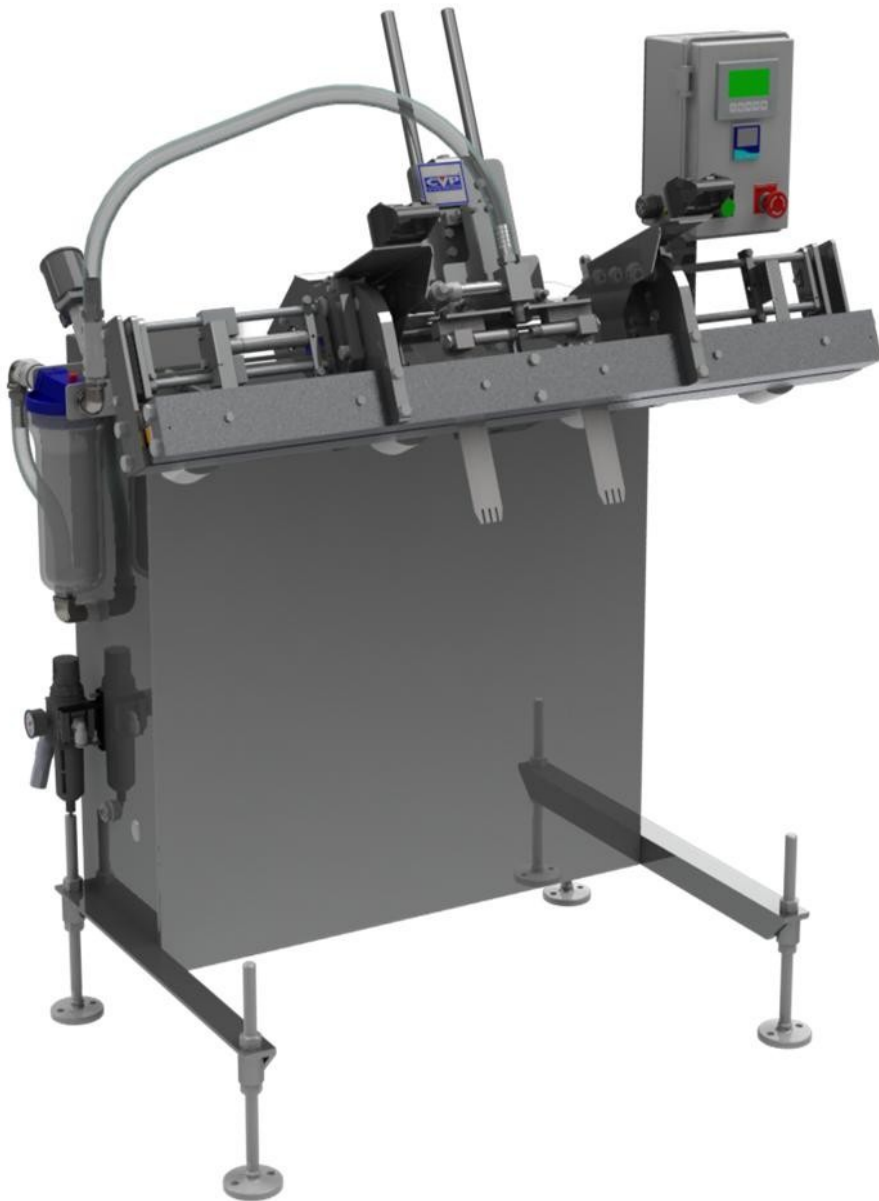

**FROM THE PIONEERS IN
MODIFIED ATMOSPHERE
PACKAGING**

Built for precision operation, the A-200 C is designed for today's rigorous production schedules. It's fast, efficient and offers the consistent reproducibility to meet today's industry standards.

PLC controls with pre-set pack settings give it the flexibility to handle a wide range of operational requirements.

Enhanced sanitary design, coupled with ease of installation and operations, makes the A-200 Series the worldwide leader in MAP applications.

View our videos on-line by scanning the QR code




Or go to www.cvpsystems.com

*Cutting edge technology from the leader in modified atmosphere packaging.
Made with pride in the USA since*


1972




A-200 C MODEL DESIGN FEATURES

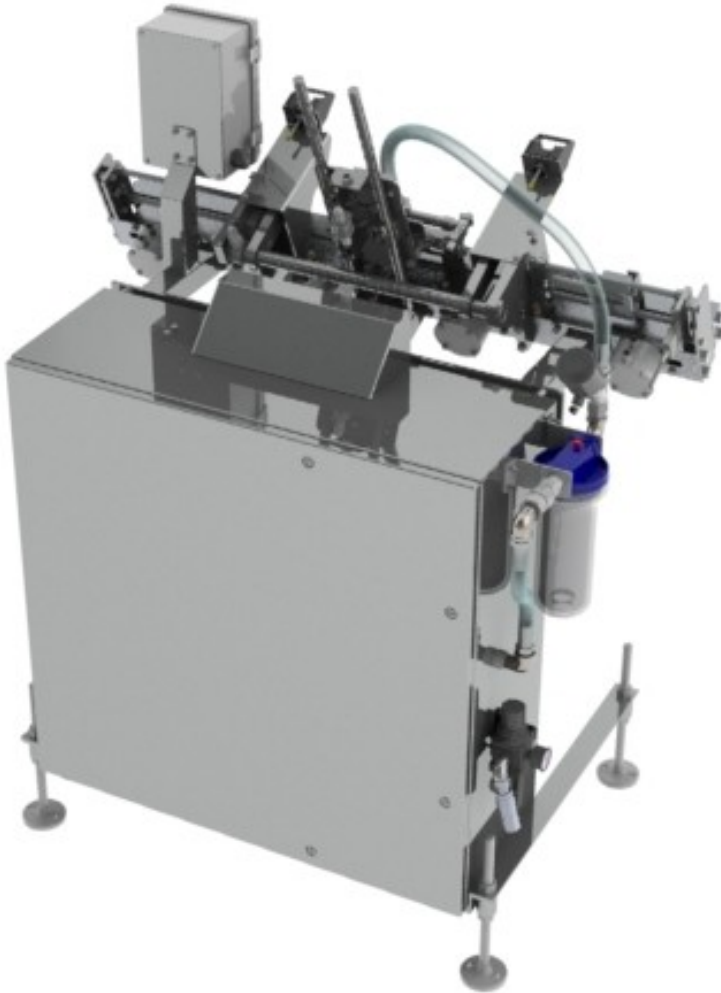

Fully Enclosed Cabinet

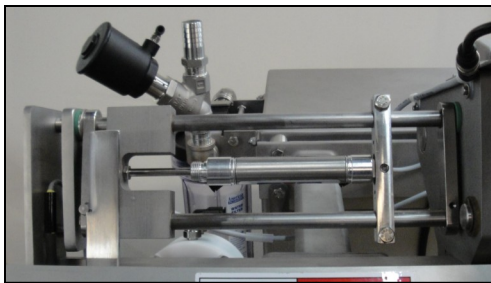

Optional Bag Stretcher



**Stainless Snorkels
and Seal bar**

Hygienic Design

- Clean-in-place system for internal cleaning.
- Fully enclosed tubing and wiring in stainless steel cabinet.
- External wash down capability.
- Stainless steel snorkels.
- Stainless steel seal bars.

Flexibility

- Specific option packages for meat, poultry, dairy, liquids, nuts, powders, grains and industrial goods.
- PLC controls with flexibility of pre-set controls.

Custom Options

- Custom PLC programs available.
- High and low Oxygen systems available.

Seal Integrity

- Digital temperature controls with hot bar system.
- Seal bar profiles minimize leakers.
- Optional bag stretchers eliminate wrinkles, ensuring leak-free seals.

Reproducible Results

- 48" manifold with positive vacuum gas seal design.
- PLC controls with digital vacuum and gas flush controls.
- Optional accumulator tank for accelerated speed of operation.

Construction	Stainless Steel
Dimensions	48.5"W x 28.75"D x 61H" (1232mm x 729mm x 1552mm)
Power Requirements	120/220 VAC, 1 Phase, 20/10 Amp
Air Consumption	2 CFM @ 80 psi/cycle
Manifold Length 48" (1219mm)	Effective Seal Length 46" (1168mm)



2518 Wisconsin Avenue
Downers Grove, IL 60515 USA
Phone: (630) 852-1190
Website: www.cvpsystems.com
Email: sales@cvpsystems.com