

ELT

Project Name:	
Type:	



APPLICATION

This recessed, low-profile designed with an acrylic lens, high performance luminaire provides general illumination. Its high efficiency, great performance and value make it an ideal choice for commercial and institutional environments.

FEATURES:

- 100% acrylic, clear prismatic, pattern #12 with minimum 0.1" thickness A12 lens as standard.
- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Standard steel door frame allows easy lens replacement without tool. Unique door frame design delivers a premium extruded appearance. Smooth edges for easy handling. Powder-painted, door steel latches provide easy, secure door closure.
- Painted parts finished with high-gloss baked white enamel over rust inhibiting phosphate coating.
- PAF (Painted After Fabrication) finish is standard for corrosion resistance and efficiency.

MOUNTING:

- Recessed ceiling mount.
- Compatible with most ceiling types.
- Field installed flange kit. (available as option)

LED:

- High quality array LEDs.
- LM80
- Color Temperature: 2700/3000/3500/4000/5000 (K)
- Color Rendering Index: > 80
- Calculated L70: 122,000 hours
- Reported L70: >54,000 hours

ELECTRICAL:

- High power factor electronic driver, operate from a 120 ~ 277 Vac input range, 50 / 60 Hz.
- Features included over voltage protection, surge, short circuit protection and over load protection.
- Power Factor: typical > 0.95, THD <20, meets Class1 or Class 2 circuit.
- Philips Xitanium: 0-10V Dim to 1%(PH).
- Universal Lighting Everline : 0-10V Dim to 1%(ULT)
- Osram Optotronic: 0-10V Dim to 1%(OS1) or 10%(OS).
- Generic : 0-10V 10% dim. (GR)
- Minimum starting temperature: -4°F (-20°C) ~ 122°F (50°C).

<ELCU-200>

- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- "Watchdog" feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

LISTING:

- UL/CUL listed and labeled.
- Listed to UL 1598 and UL 8750.
- Recessed Luminaires, Type IC
- DLC listed. ⁶
- Suitable for damp locations.
- CEC Compliant EM (please contact for more information)
- 5 years limited warranty.
- 7 or 10 years limited warranty. (optional) ⁷
- ARRA compliant (optional).
- LM-79 (DLC listed products only)
- Bluetooth Mesh System available, please contact factory for more information.

CONFIGURATIONS

Series	Size	LED	AC Input	Lumen Output (4000K)	Lumen Efficiency (4000K)
ELT-2G	1' x 4'	27LED	28.5W	3537 lm	124.10 lm/W
		36LED	39.33W	4361.57 lm	110.90 lm/W
		44LED	46.71W	5584.36 lm	119.55 lm/W
		54LED	57.33W	6404.25 lm	111.71 lm/W
		72LED	78.66W	9339.55 lm	118.73 lm/W
		108LED	114.66W	13713.58 lm	119.60 lm/W
	2' x 2'	27LED	29.76W	3598.15 lm	121.27 lm/W
		36LED	39.22W	4536.36 lm	115.66 lm/W
		44LED	46.84W	5384.59 lm	114.96 lm/W
		54LED	57.49W	6608.91 lm	114.96 lm/W
		72LED	78.44W	9072.71 lm	115.66 lm/W
		108LED	114.98W	13216.80 lm	114.95 lm/W
	2' x 4'	174LED	174.0W	20000 lm	114.94 lm/W
		36LED	39.58W	4850.41 lm	122.55 lm/W
		44LED	47.08W	5798.86 lm	123.17 lm/W
		54LED	57.79W	7134.53 lm	123.46 lm/W
		72LED	75.50W	9238.20 lm	122.36 lm/W
		108LED	108.0W	13088.52 lm	121.19 lm/W
		174LED	174.0W	21087 lm	121.19 lm/W

CCT	Multiplier		
	3000K	3500K	5000K
1X4	0.9502	0.9837	1.0173
2X2	0.9891	0.9951	1.0119
2X4	0.9809	0.9980	1.0030

ELT

OUTPUT CURRENT


		Bi-Level		Tri-Level (Default)	
SW1	SW2	Config Range	Default	Config Range	Default
Close	Open	10% - 70%	40%	10% - 70%	30%
Open	Close	10% - 70%	40%	10% - 70%	70%
Close	Close	100%	100%	100%	100%
Open	Open	0%	0%	0%	0%

CEILING OPENING

Series	Size	Width	Length
FK	1' x 2'	12-3/8"	24-3/8"
	1' x 4'	12-3/8"	48-3/8"
	2' x 2'	24-3/8"	24-3/8"
	2' x 4'	24-3/8"	48-3/8"
FTSH	1' x 4'	12-3/16"	48-3/4"
	2' x 2'	23-15/16"	24-7/8"
	2' x 4'	24-5/8"	48-3/4"


ORDERING INFORMATION

EXAMPLE: ELT22-2G-36LED-40K-UNV-SD50

MODEL		LED		COLOR TEMP.		EFFICACY		CRI	
ELT14-2G	1' x 4'	27LED	27W LED	-27K	2700K ¹¹	(Blank)	Standard	(Blank)	80+ CRI ¹²
ELT22-2G	2' x 2'	36LED	36W LED	-30K	3000K	HE	High Efficacy 	C9	90+ CRI ¹²
ELT24-2G	2' x 4'	44LED	44W LED	-35K	3500K				
		54LED	54W LED	-40K	4000K (Std.)				
		72LED	72W LED	-50K	5000K				
		108LED	108W LED						
		* Contact factory for custom wattage or lumen requirement. ¹³							
ELT22-2G	2' x 2'	174LED	174W LED						
ELT24-2G	2' x 4'								


DOOR FRAME		TRIM TYPE		DIFFUSER		VOLTAGE	
(Blank)	Flush Steel, White	(Blank)	Grid	(Blank)	Pattern #12 Acrylic Lens 0.1"	UNV	120-277V
SB	Flush Steel, Black	FK	Flange ¹	A12125	Pattern #12 Acrylic Lens 0.125" Thick	120	120V
FB	Flush Aluminum, Black	FTSH	Flanged Trim ²	P12125	Pattern #12 Polycarbonate Lens 0.125" Thick	277	277V
FN	Flush Aluminum, Natural			WA125	Lumieo white acrylic lens 0.125" Thick	347	347V
FW	Flush Aluminum, White			A19	Pattern #19 Acrylic Lens 0.156" Thick	480	480V ³
RB	Regressed Aluminum, Black			P1	5/8"x5/8"x7/16" Deep Specular Plastic Louver		
RN	Regressed Aluminum, Natural			FR	Frosted Acrylic Lens, Pattern#12 0.100" thick		
RW	Regressed Aluminum, White			FR12	Frosted Acrylic Lens, Pattern#12 0.125" thick		
AMB	Anti-Microbial Coating (Matte Skye White)			PSOL	3/4" x 3/4" x 3/8" Deep Specular Plastic Louver with overlay		

LED DRIVER		OPTIONS	
GR	Generic, 0-10V 10% dim (Std.) ¹⁰	EMG8	1296 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
PH	Philips Xitanium, 0-10V 1% dim ¹⁰	EMG15	2430 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
ULT	Universal Everline 0-10V 1% dim ¹⁰	EMG20	3240 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
OS	Osram Optotronic, 0-10V 10% dim ¹⁰	ELCU-200	Fail-to-on Emergency lighting, UL924 ¹⁴
OS1	Osram Optotronic, 0-10V 1% dim ¹⁰	GTD	Bodine Generator Transfer Device
SD40	40% / 100% Bi-Level Step dim (PH only)	GTD10DIM	Bodine Generator Transfer Device (0-10VDC Dimmer Override)
SDXX	XX% / 100% Bi-Level Step dim (Specify XX : 10%~70%) (PH only)	ARRA	Assembled in USA for Buy American Act
TDM	Triac Dim. (120V only)	AB	Two Ballast for AB Switch
TD30/70	30% / 70% / 100% Tri-Level Step dim (PH only)	MS11	Master Slave w/ 11' Whip
TDXX/YY	XX% / YY% / 100% Tri-Level Step dim (Specify XX, YY : 10% ~ 70%) (PH only)	WT	Wet Location ¹⁷
ES566	eldoLED SOLOdrive Natural Dimming to dark, 0-10V, 100% ~ 0.1% dim	PW6	Pre-wired 6' Whip Flex
LDE1	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim	AMS	Occupancy Sensor w/ Daylight Harvesting (max. 8' detection mounting height with 14' coverage) ⁸
ELV	ELV compatible (reverse-phase or trailing-edge)	DPMS	Daylight Dimming Photo Sensor (0-10 VDC Control), (LSR-301-S required) ¹⁸
PHSR	Philips Xitanium Sensor-Ready, Dali 5%~100% dim	SO	Dimming Wires connected to Sensor Only ⁹
PHDL	Philips Xitanium DALI driver, Dim to 5%	LSR-301-S	Setup Remote Control for DPMS (Required for DPMS)
DIMT	Tri-mode dimming (Triac, ELV, 0-10V)	LSR-301-P	Occupant Remote Control for DPMS
DMX	DMX512 control system (Only available with RGB+W option)	O7W	Optional 7 Years Limited Warranty ⁷
DLM	Wattstopper's DLM interface(Only available with RGB+W option)	O10W	Optional 10 Years Limited Warranty ⁷
ED560	eldoLED LightShape DALI dim to dark, 0.1% ~ 100%	GS1	Single Gasketing
LTEA2W	Hi-lume 1% 2-wire LED driver(120V forward phase only)	GS2	Double Gasketing
BLT	Bluetooth Mesh System (contact factory for more information)	GS3	Triple Gasketing
		LMS-109	Line Voltage integrated microwave Sensor
		HC403	Microwave bi-level Occupancy Sensor, adjustable via DIP switch ¹⁹

LIGHTING CONTROL SYSTEM	
<p>LUTRON VIVE</p> <p>SNS200C</p> <p>RS-IR</p>	<p><Lutron Vive System Enabled></p>  <p><EasySense></p> <p>EasySense Ceiling-mount occupancy sensing, daylight harvesting and task tuning in one device (Must be ordered with PHSR driver) ^{15, 16}</p> <p>IR dongle v2.0 for EasySense control</p>

NOTES:

1. Flange kits are supplied in separate boxes, field installed.
2. Flanged trims are supplied with swing gate hanger.
3. Supplied with step down transformer.
4. Contact factory for other emergency ballast options.
5. Must specify voltage, not available with 347V, 480V.
6. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
7. This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation. (EM battery backup does not included)
8. The standard will be ON/OFF sensor with dimming wires provided for dimmer switch. For sensor dimming control, please select additional "SO" option.
9. Dimming wires provided and connected to sensor only, not for dimmer switch. (available with AMS and DPMS option)
10. To find an approved dimmer switch, please see table 1.
11. Available with C9 only.
12. Lumen per watt is around 15% less than standard CRI (80+).
13. Custom wattage products are not DLC qualified.
14. Shipped separately.
15. See NFC and IR manual in the separate attachment. If your phone is not compatible, please order "RS-IR" and follow the manual.
16. Refer to Advanced Grouping Datasheet for its default setting and compatible wireless switches.
17. Closed cell gasket between housing and door frame, and between lens and door frame (additional gasket between housing and ceiling grid available with G3 option). FW door and Grid Ceiling only.
18. Automatic on/off is not available. For automatic on/off, additional occupancy sensor is required or a manual on/off switch can be done.
19. See Table2 to find factory setting.



Specifications: 1'x4'


Length: 47-3/4 (1213)
 Width: 11-15/16 (303)
 Depth: 4-1/2 (115)
 Weight: 16.16 lbs (7.33 kg)

Specifications: 2'x2'

Length: 23-3/4 (603)
 Width: 23-15/16 (608)
 Depth: 3-1/2 (88.9)
 Weight: 13.07 lbs (5.93 kg)

Specifications: 2'x4'

Length: 47-3/4 (1213)
 Width: 23-15/16 (608)
 Depth: 3-1/2 (88.9)
 Weight: 21.01 lbs (9.53 kg)



Specifications: 1'x4'

Length: 47-3/4 (1213)
 Width: 11-15/16 (303)
 Depth: 4-1/2 (115)
 Weight: 16.16 lbs (7.33 kg)


Specifications: 2'x2'

Length: 23-3/4 (603)
 Width: 23-15/16 (608)
 Depth: 3-1/2 (88.9)
 Weight: 13.07 lbs (5.93 kg)

Specifications: 2'x4'

Length: 47-3/4 (1213)
 Width: 23-15/16 (608)
 Depth: 3-1/2 (88.9)
 Weight: 21.01 lbs (9.53 kg)

All dimensions are in inches (millimeters).

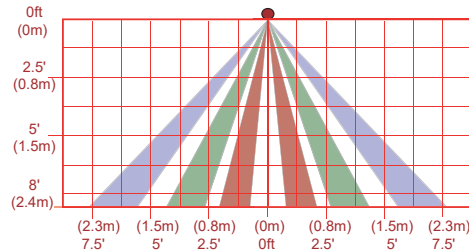

AMS coverage pattern (side view)

* The coverage shown in the diagram is maximum.
 AMS is designed to detect small motion when mounted within 6' occupants.

COMPATIBLE DIMMER SWITCH (TABLE 1)

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Leviton>	IlumaTech IP7 series
		<Lutron>	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver.
		<Philips>	Sunrise : SR1200ZTUNV
ES566	eldoLED SOLOdrive	<Busch-Jaeger>	2112U-101
		<Jung>	240-10
		<Leviton>	IlumaTech - IP710-DLX
		<Lightoller Controls>	ZP600FAM120
		<Merten>	5729
		<Pass & Seymour>	CD4FB-W
		<Wattstopper>	DCLV1
		<Sensor Switch>	nIO EZ
		<Synergy>	ISD BC
		<ABB>	SD/S 2.16.1
		<Lutron>	Nova T: NTFTV Diva - DVTV-xx, NFTV GRAFIK Eye: GRX-TVI w GRX3503 Energy Savr Node: QSN-4T16-S TVM2 Module
		<Crestron>	GLX-DIMFLV8, GLXP-DIMFLV8, GLPAC-DIMFLV4-*, GLPAC-DIMFLV8-*, GLPP-DIMFLVEX-PM, GLPP-1DIMFLV2EX-PM, GLPP-1DIMFLV3EX-PM, DIN-AO8, DIN-4DIMFLV4, CLS-EXP-DIMFLV, CLCI-1DIMFLV2EX
ED560	eldoLED DUALdrive	<Lunatone>	SS-LUNAT PS2 30mA, SS-LUNAT Touch or BT, SS-LUNAT Comm
LDE1	Lutron 5-Series EcoSystem	<Lutron>	PowPak Dimming Modules: RMJ-ECO32-DV-B, FCJ/FCJS-ECO ^{1,2} Energi Savr Node (120V only): QSN-1ECO-S, QSN-2ECO-S GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGRJ-_E(wireless) QSGR-_E Quantum Hub (120V only): QP2-_2C/4C/6C/8C Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D
PHSR ³	Philips Xitanium Sensor-Ready	<Ilumra>	<u>Single Rocker Self-Powered Light Switch (on/off, dim-up/down)</u> Ilumra# ZBT-S1AWH Digi-Key# 1082-1033-ND <u>Dual Rocker Self-Powered Light Switch (on/off, dim-up/down, scene1,2)</u> Ilumra# ZBT-S2AWH Digi-Key# 1082-1034-ND
LTEA2W	Lutron Hi-lume 2-wire (120V forward voltage only)	<Lutron>	Visit http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf for a list of compatible dimmer switches.

NOTES:

- All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command. For more detail on adjusting low-end light level refer to Application Note#556 at www.lutron.com.
- For the Line/Hot (L/H) terminal on the driver, it is preferred not to use the switched hot (red) wire from the control but rather the hot wire directly from the power source.
- Recommended for EasySense System.


HC403 FACTORY SETTING (TABLE 2)

Detection Area	100%
Hold-time	5 sec
Daylight sensor	Disable
Stand-by period (tri-level control)	10 sec
Stand-by dimming level	10%


* See a separate attachment to find more setting options.

ELT


ELT14-2G-27LED




ELT14-2G-36LED




ELT14-2G-44LED




ELT14-2G-54LED




ELT14-2G-72LED




ELT14-2G-108LED




ELT22-2G-27LED




ELT22-2G-36LED




ELT22-2G-44LED




ELT22-2G-54LED




ELT22-2G-72LED




ELT22-2G-108LED




ELT24-2G-36LED




ELT24-2G-44LED



ELT24-2G-54LED



ELT24-2G-72LED



ELT24-2G-108LED

