

CPG SERIES

Canopy/Soffit Luminaire

Part #:


DL-CP-45W-211X-1601

Note: The Letter X in P/N stands for
1: Direct Mount
2: Pendant Mount




Advantage:

- UL cUL DLC certificate
- IP65 Internal driver, Input voltage 100-277Vac
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, Long lifespan
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

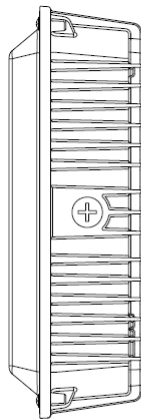

90mm

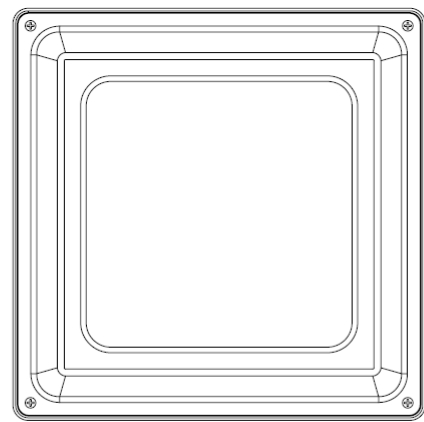

270mm

270mm

Application:

Parking Garage
Gas Canopy



Product Specifications

Product name	LED Outdoor Light
Part No	DL-CP-45W-2111-1601 or DL -CP-45W-2112-1601
Dimension	270 x 270 x 90 mm

Technical Characteristic

Color temperature	4000K	5000K	5700K
CRI	>80		
Lumen	4800 - 5300LM		
Input Power	45W		
Viewing Angle	110°		
Input Voltage	100-277Vac 50/60Hz		
Driver model	China Brand Driver		
PFC	>0.9		
Waterproof Rating	WET (IP65)		

Materials



LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D (1.5W)
LED QTY	56 PCS
Housing	Aluminum
Housing color	White

Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL、cUL、DLC
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 113.13 lm/W
MODEL		Imax (cd)	1981	S/MH (C0/180)		1.30
NOMINAL POWER (W)	45	LOR (%)	100.0	S/MH (C90/270)		1.30
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	5034.2	η UP, DN (C0-180)		0.1, 49.8
NOMINAL FLUX (lm)	5034.19	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.1, 50.1
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	120.0	η down (%)	99.9	CIBSE SHR MAX		1.35

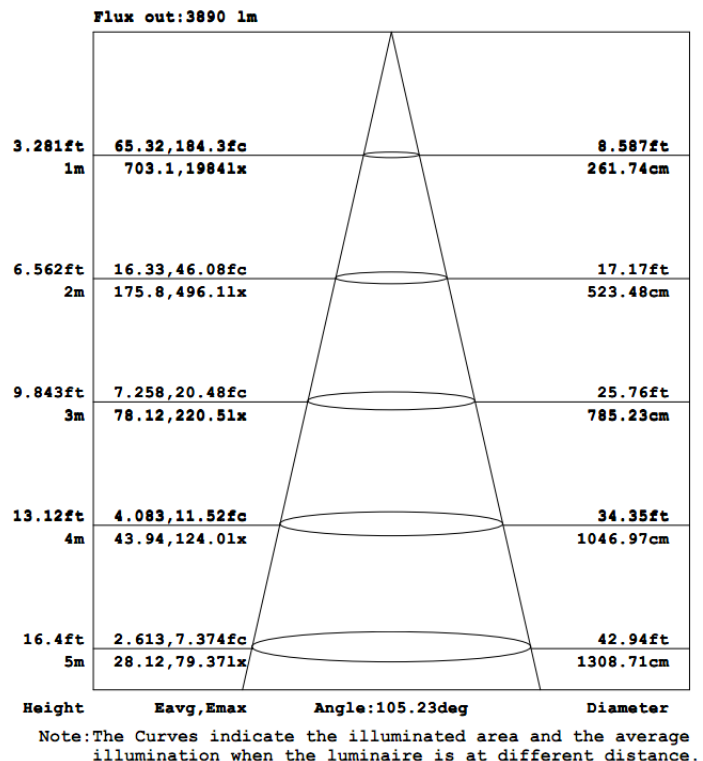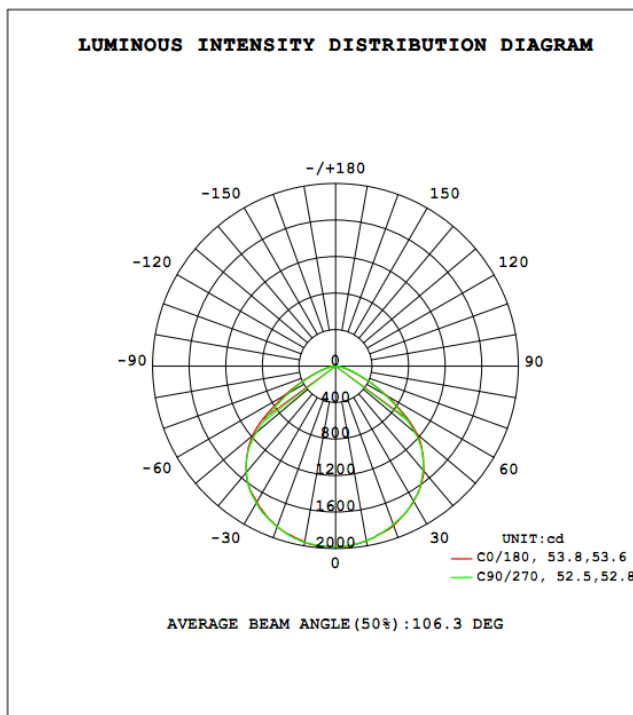

Notice

- ◆ Please turn off power before installation, replacement or repair of the fixture.
- ◆ Disconnect and remove the existing fixture.
- ◆ Open the back cover and connect three AC power color coded wires.
- ◆ Mount the new fixture and tighten mounting screws, test for any movement.
- ◆ There's no user serviceable parts, tempering voids warranty.
- ◆ Installation requires licensed professional and may require electrical permit.