


FE-SPK-IP2

FE-SPK-IP2 is an active PoE+ SIP-speaker able to connect to any SIP-server as standard SIP-client and get a phone call as standard SIP-extension.

Simple installation and setup, Vandal-proof.

Audio files and voice messages can be streamed live or uploaded to device to play them later or periodically from built-in timer/scheduler. Auto-provisioning through IP-INTEGRA SIP-server saves time, especially in the case of large-scale installations. The module can easily be integrated with 3rd party SIP systems through WEB interface.

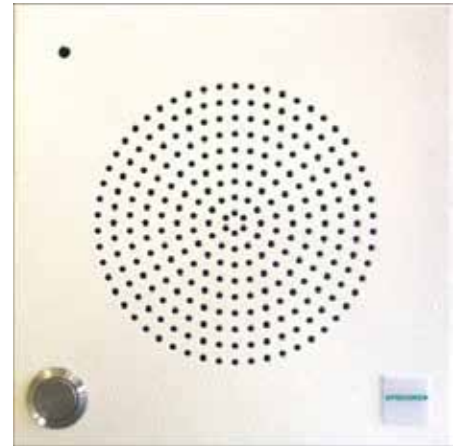

At a first glance

- EN 54-24 Certification, BS 5839 Part 8 and EN 60849 Compliant
- Vandal-proof
- User-friendly WEB interface for Remote Setup
- Fitted with a 5" Twin Cone Driver Unit
- Designed for wide response (music and speech)
- Self-diagnosing and reporting through e-mail
- 10W Additional Output for connecting an extra Passive Speaker
- SIP-Call to pre-programmed destination

Specification

HARDWARE

Ethernet connector	1x RJ 45
Power Options	PoE and/or external PS 5V/1.5A DC
PoE	IEEE 802.3at
Power Consumption	Idle: 1.8W / Max: 20W (Volume dependant)
CPU	Allwinner H2+, Quad-core Cortex A-7

NETWORKING AND PROTOCOLS

Protocols	IPv4 (with DiffServ), SIP, TCP, UDP, HTTP, RTP, DHCP, SNMP, NTP
LAN Protocols	PoE (802.3at) Network Access Control (802.1x)
Management and operation	HTTP (Web Configuration) DHCP and Static IP, Remote Software upgrade, Centralized monitoring
SIP Support	RFC3261 (SIP Base Standard), RFC3515 (SIP Refer), RFC2976 (SIP Info), SIP using TLS, RFC5630 SIPS Uri scheme
DTMF Support	RFC2833, 2976 (SIP Info)

OTHER SPECIFICATIONS

Input	1x I/O PIN
Output	5V DC and 12V DC 3x Open-Controller @ 2A, up to 15V (LED RGB Button drive)
Microphone	1 On-board connector

SPEAKER SPECIFICATION

Rated Power	6 W
Impedance	8 Ω
SPL (1W/1m)	90 dB
MAX SPL (Rated W/1m)	98 dB
Frequency range (-10dB)	190 Hz to 18 kHz
Dispersion 1 kHz / 4 kHz	175° / 65°
Operating temperature	-30°C to +60°C
Power Selection	PoE+
Material	Housing: Steel
Colour and finish	White
Dimensions	163.5x163.5x60 mm (HxWxD)
Net Weight	2kg
Mounting	Screws